

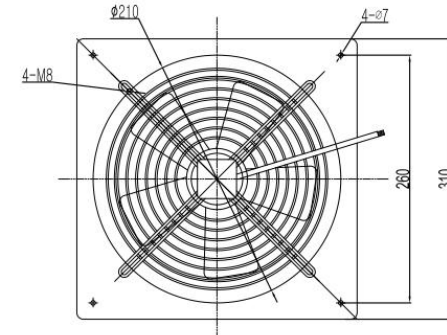
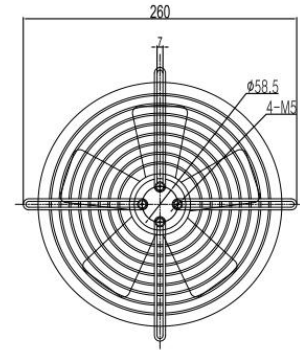





Ø 200MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF2E200	220	50	0.28	63	2550	2	2.5	52	750	①
YWF2D200	380	50	0.17	69	2600	/	2.5	52	790	②
YWF4E200	220	50	0.21	40	1400	1.5	2.5	45	556	③

尺寸图/Dimensions:

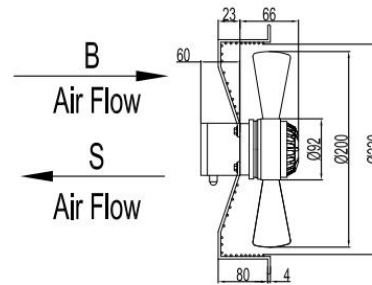

流量曲线/Airflow curves:




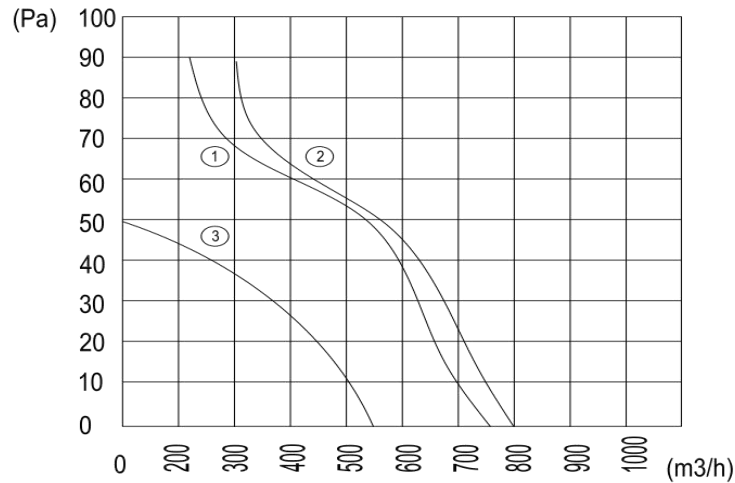





Ø 250MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF2E250	220	50	0.48	104	2550	3	3.0	60	960	①
YWF2D250	380	50	0.25	104	2550	/	3.0	60	965	②
YWF4E250	220	50	0.25	50	1400	2	3.0	55	715	③
YWF4D250	380	50	0.18	55	1400	/	3.0	55	740	④

尺寸图/Dimensions:

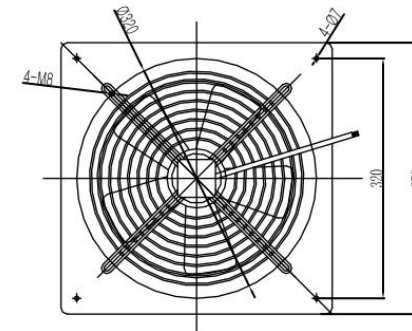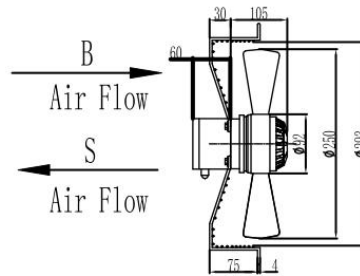

流量曲线/Airflow curves:

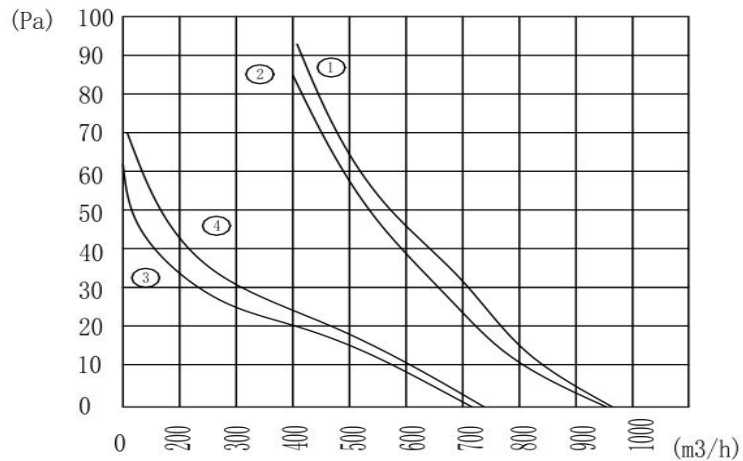







Ø 300MM


Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF2E300	220	50	0.62	136	2550	4	3.3	61	2020	①
YWF2D300	380	50	0.40	136	2550	/	3.3	61	2060	②
YWF4E300	220	50	0.42	85	1380	3	3.3	58	1170	③
YWF4D300	380	50	0.32	90	1380	/	3.3	58	1230	④

尺寸图/Dimensions:

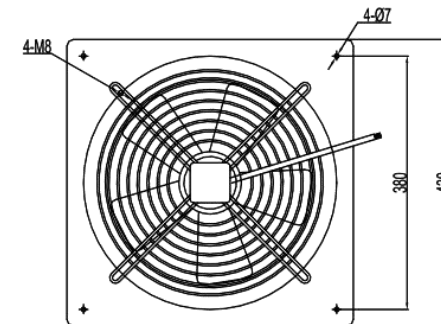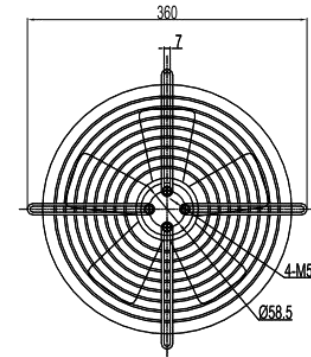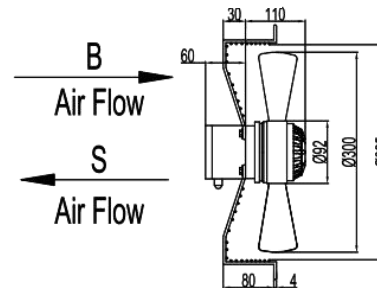

流量曲线/Airflow curves:


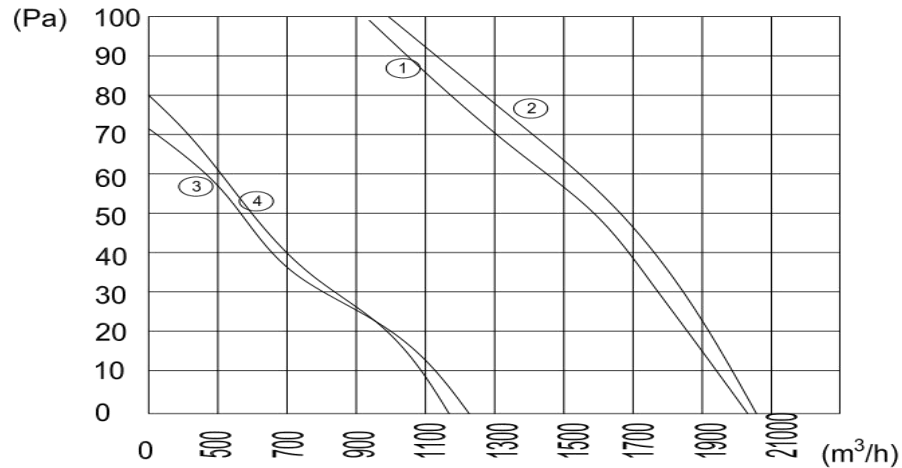





Ø 350MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF4E350	220	50	0.75	150	1400	4	5.0	62	2260	①
YWF4D350	380	50	0.42	150	1400	/	5.0	62	2280	②
YWF6E350	220	50	0.40	80	955	3	5.0	56	1520	③
YWF6D350	380	50	0.30	80	955	/	5.0	56	1500	④

尺寸图/Dimensions:

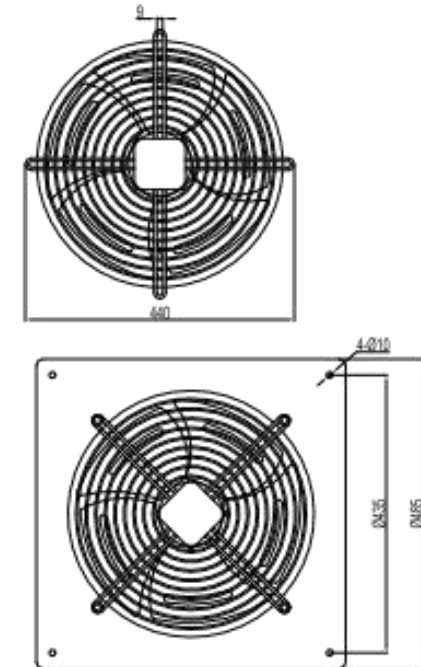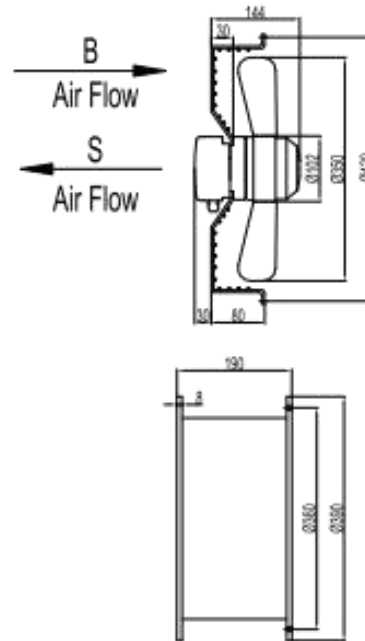

流量曲线/Airflow curves:


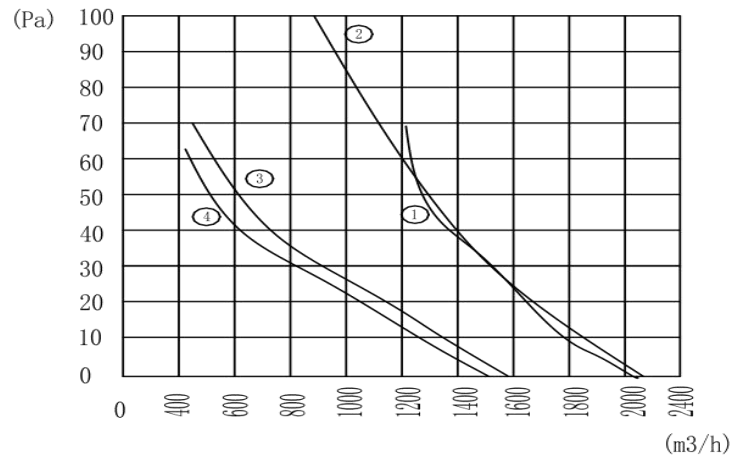





Ø 400MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF4E400	220	50	0.90	190	1360	6	6.0	66	3830	①
YWF4D400	380	50	0.50	190	1380	/	6.0	66	3980	②
YWF6E400	220	50	0.60	115	920	4	6.0	58	2840	③
YWF6D400	380	50	0.40	115	920	/	6.0	58	2890	④

尺寸图/Dimensions:

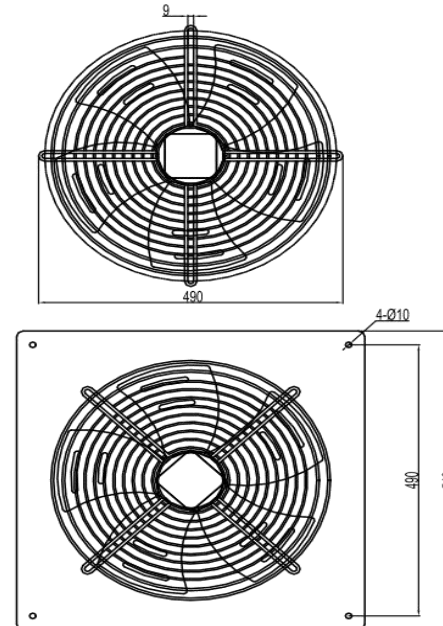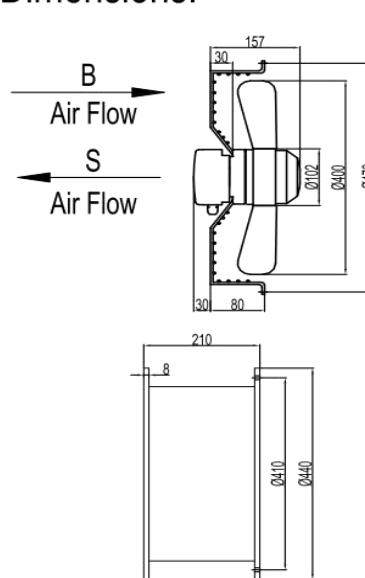

流量曲线/Airflow curves:



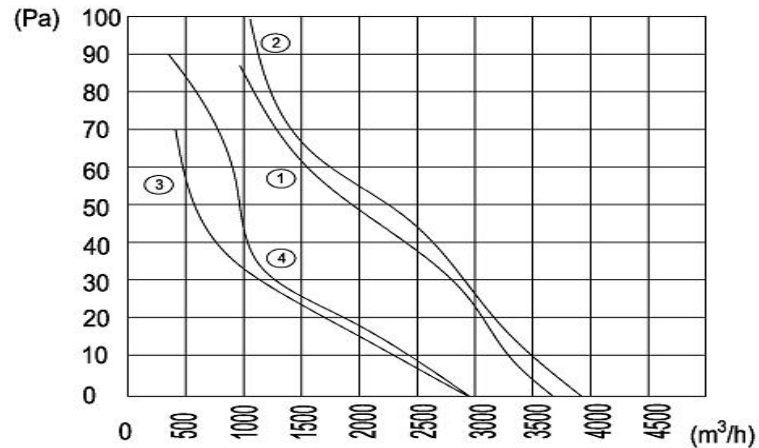





Ø 450MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF4E450	220	50	1.20	250	1350	8	7.5	68	4600	①
YWF4D450	380	50	0.64	250	1380	/	7.5	68	4760	②
YWF6E450	220	50	0.72	150	920	6	7.5	60	3210	③
YWF6D450	380	50	0.40	150	920	/	7.5	60	3520	④

尺寸图/Dimensions:

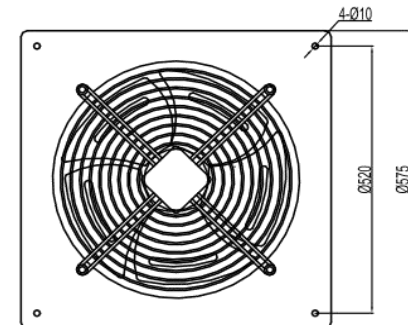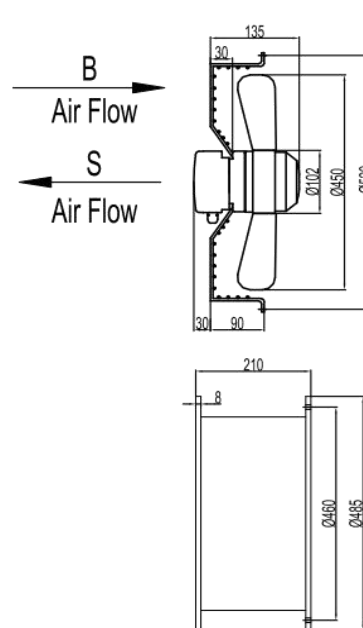

流量曲线/Airflow curves:

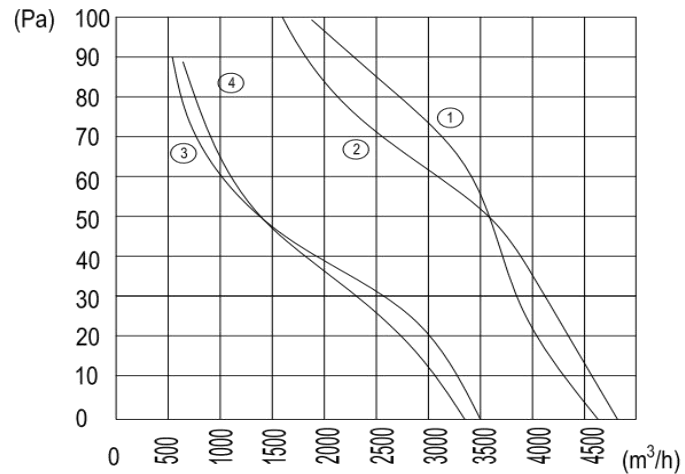








Ø 500MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF4E500	220	50	2.00	420	1350	10	10.0	72	6420	①
YWF4D500	380	50	0.85	420	1370	/	10.0	72	6560	②
YWF6E500	220	50	1.10	220	920	10	10.0	68	4850	③
YWF6D500	380	50	0.62	220	920	/	10.0	68	4850	④

流量曲线/Airflow curves:

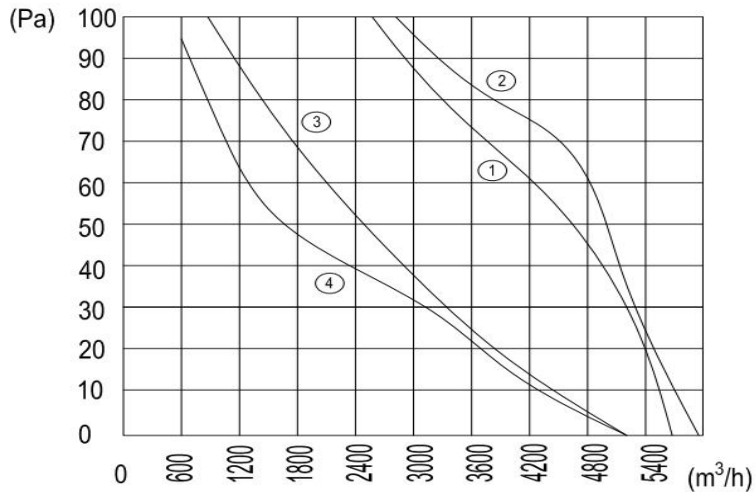

尺寸图/Dimensions:

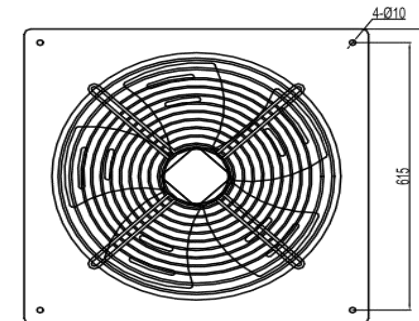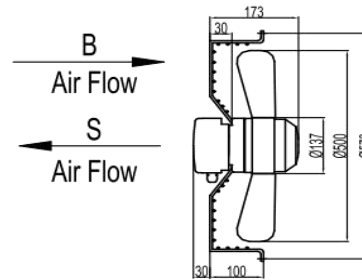





Ø 550MM Axial fans with AC external rotor motor

型号	电压	频率	电流	功率	转速	电容	净重	噪音	最大风量	曲线
Model No.	Voltage (V)	Frequency (HZ)	Current (A)	Input power (W)	Speed (R/MIN)	Capacitor (UF)	N.W. (KG)	Noise (dBA)	Max Airflow (m³/h)	Curve
YWF4E550	220	50	2.50	530	1340	12	10.5	75	8020	①
YWF4D550	380	50	1.10	550	1350	/	10.5	75	8740	②
YWF6E550	220	50	1.50	320	910	12	10.5	70	6320	③
YWF6D550	380	50	0.85	320	910	/	10.5	70	6430	④

流量曲线/Airflow curves:

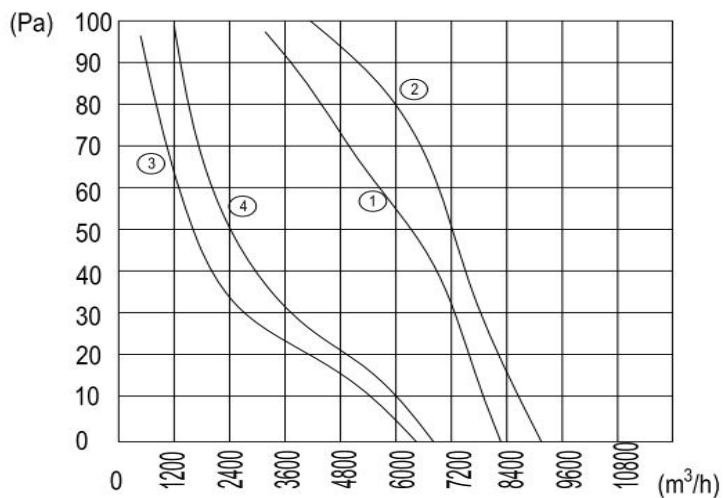

尺寸图/Dimensions:

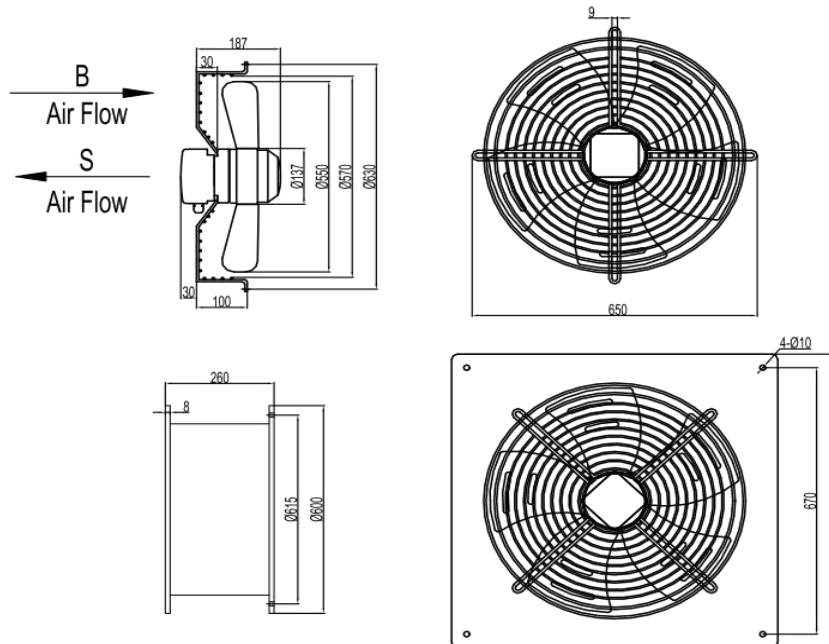





Ø 600MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF4E600	220	50	3.50	780	1350	16	14.0	77	10020	①
YWF4D600	380	50	1.50	800	1380	/	14.0	77	10840	②
YWF6E600	220	50	2.40	500	910	12	14.0	71	8040	③
YWF6D600	380	50	1.30	500	920	/	14.0	71	8130	④

尺寸图/Dimensions:

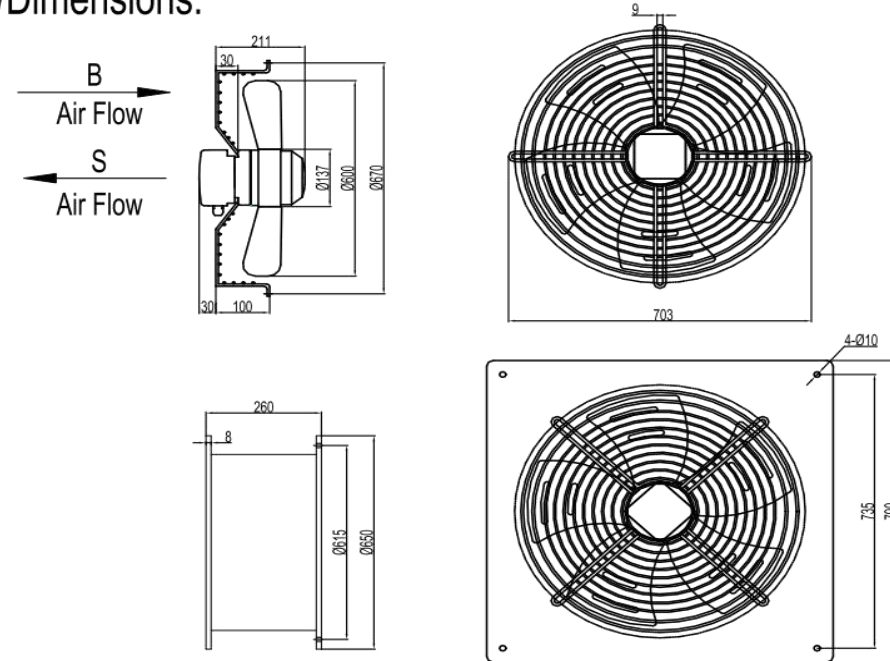

流量曲线/Airflow curves:

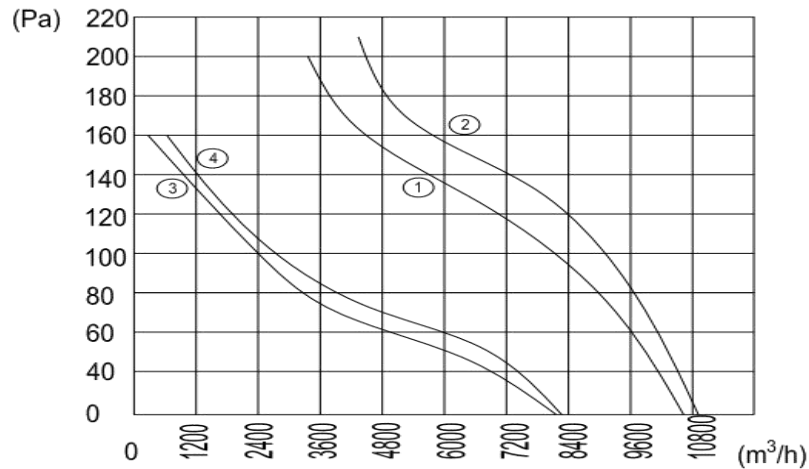





Ø 630MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF4E630	220	50	3.70	800	1340	16	15.4	78	10850	①
YWF4D630	380	50	1.60	850	1360	/	15.4	78	12260	②
YWF6E630	220	50	2.50	520	900	12	15.4	72	8900	③
YWF6D630	380	50	1.40	500	900	/	15.4	72	8900	④

尺寸图/Dimensions:

流量曲线/Airflow curves:

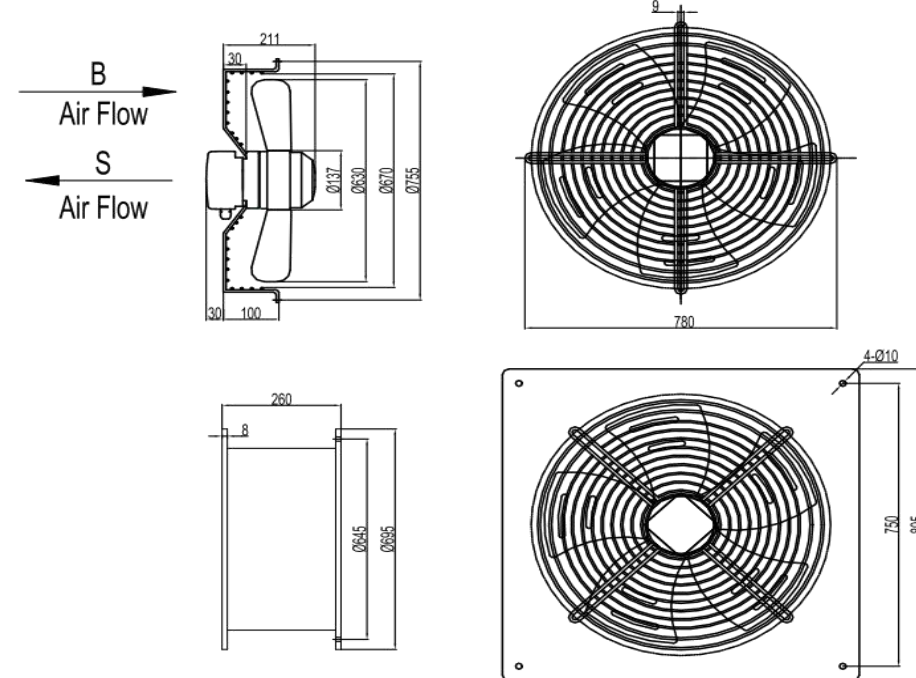
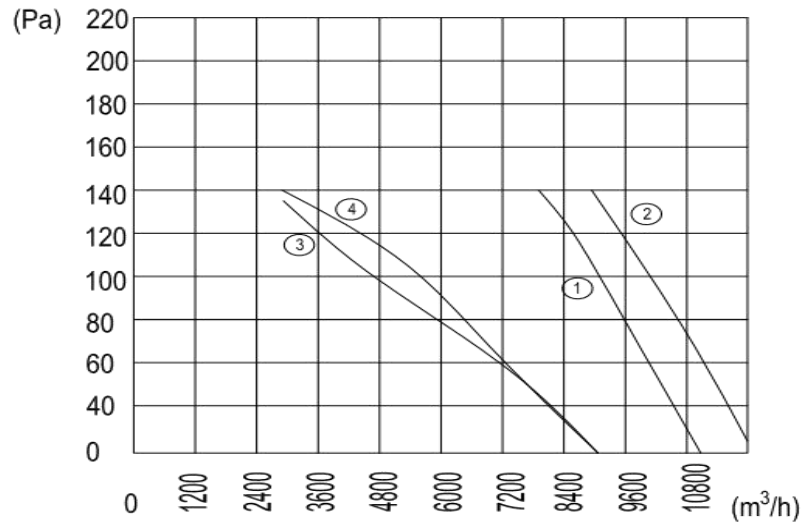





Ø 710MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF6D710	380 - Δ	50	2.45	1150	915	2	25	80	16080	①
YWF6D710	380 - Y	50	1.65	850	680	/	25	75	13200	②

尺寸图/Dimensions:

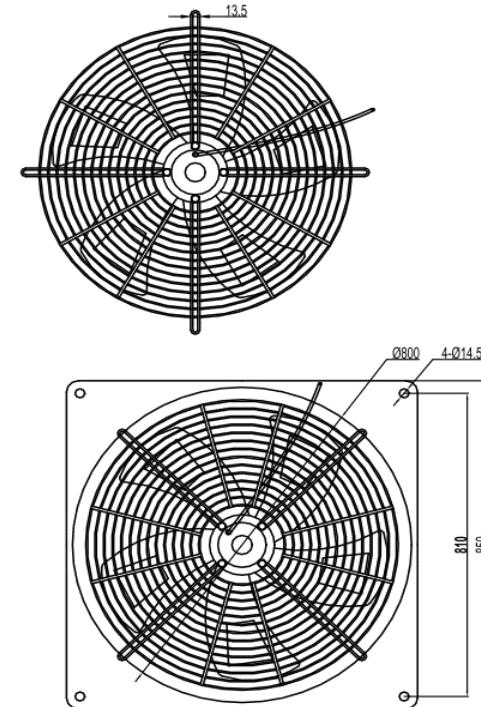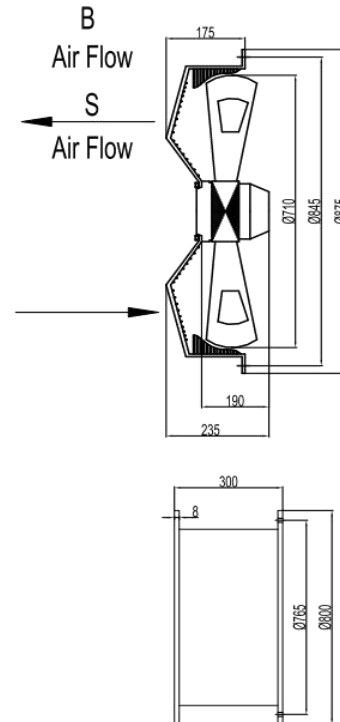

流量曲线/Airflow curves:




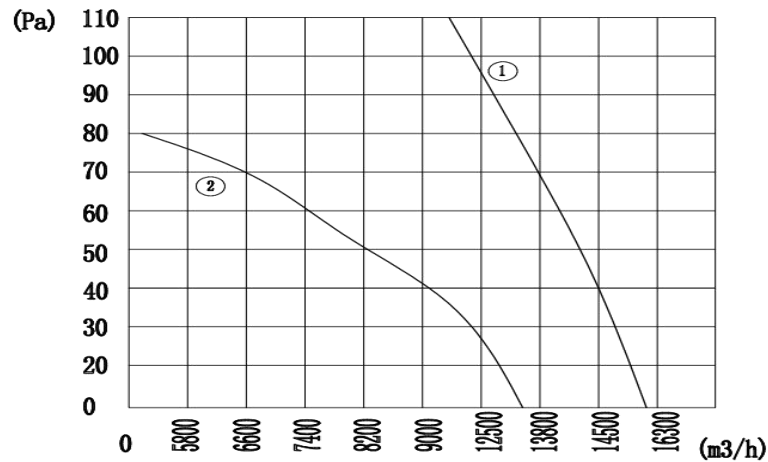





Ø 800MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF6D800	380 - Δ	50	3.50	1790	890	/	35	82	20035	①
YWF6D800	380 - Y	50	2.23	1230	680	/	35	82	16080	②

尺寸图/Dimensions:

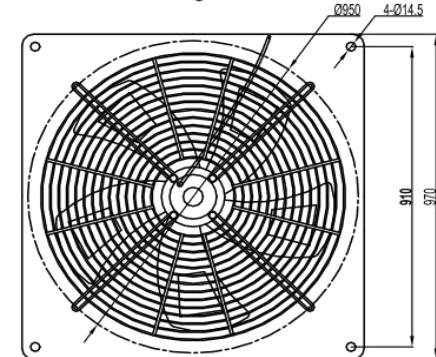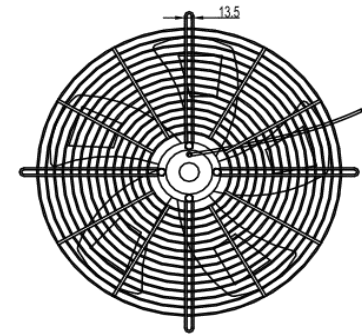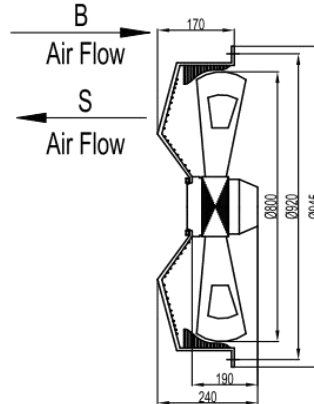

流量曲线/Airflow curves:

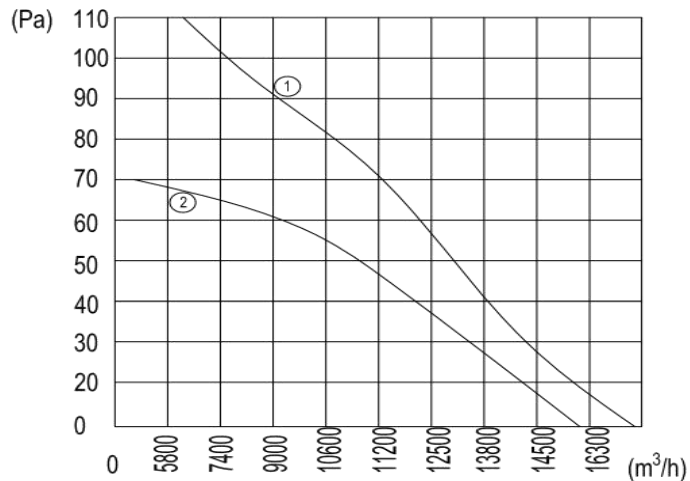







Ø 900MM Axial fans with AC external rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF6D900	380 - Δ	50	4.0	2000	915	/	50	82	27000	①
YWF6D900	380 - Y	50	2.4	1300	750	/	50	74	21500	②

尺寸图/Dimensions:

流量曲线/Airflow curves:

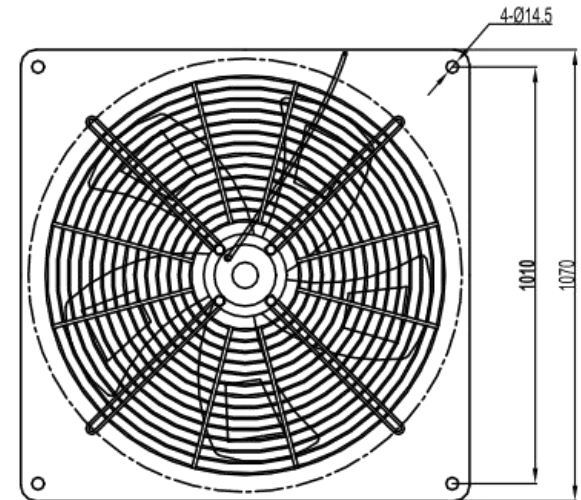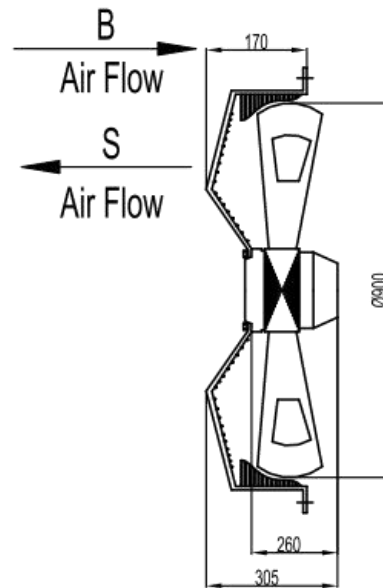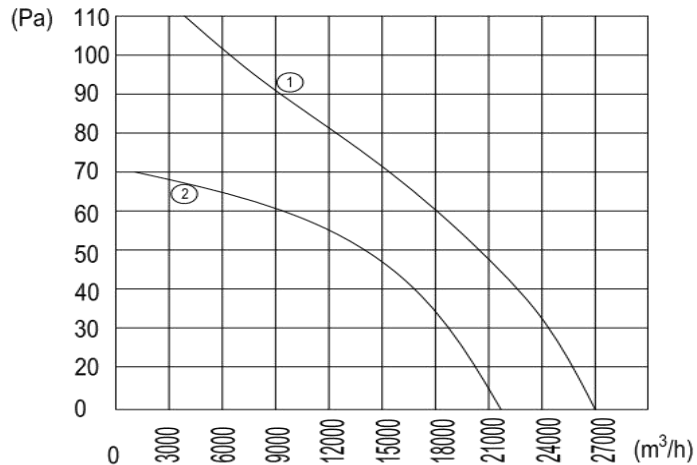




Axial fans with AC external rotor motor

型号 Model No.	尺寸 Dimension (mm)	A	B	C	D	E	F	G	H	Weight (KG)
YWF -200-FX		220	200	95	40	13	270	220	4- Ø12	3.5
YWF -250-FX		275	250	100	40	13	320	270	4- Ø12	4.28
YWF -300-FX		320	300	105	40	13	340	310	4- Ø12	4.55
YWF -350-FX		370	350	130	40	13	410	370	4- Ø12	6.4
YWF -400-FX		420	400	150	40	13	480	420	4- Ø12	8.2
YWF -450-FX		470	450	150	40	15	550	470	4- Ø12	9.7
YWF -500-FX		520	500	150	46	15	590	520	4- Ø12	11.25
YWF -550-FX		570	550	170	46	15	620	570	4- Ø12	17
YWF -600-FX		620	600	190	46	20	670	610	4- Ø12	21



安装尺寸图 Mounting dimensions

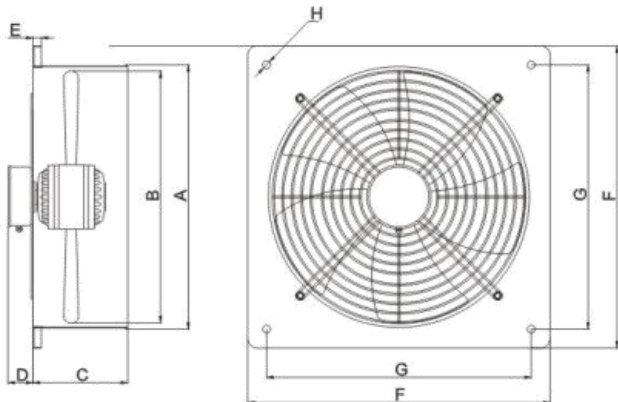



Axial fans with AC external rotor motor

型号 Model No.	尺寸 Dimension (mm)	A	B	C	D	E	F	G	H	Weight (KG)
YWF -200-FB		220	200	155	30	13	270	220	4- Ø12	4.5
YWF -250-FB		275	250	155	30	13	320	270	4- Ø12	5.6
YWF -300-FB		320	300	155	30	13	340	310	4- Ø12	6.5
YWF -350-FB		370	350	185	30	13	410	370	4- Ø12	8.1
YWF -400-FB		420	400	185	30	13	480	420	4- Ø12	11
YWF -450-FB		470	450	185	30	15	550	470	4- Ø12	13.5
YWF -500-FB		520	500	185	30	15	590	520	4- Ø12	16.5
YWF -550-FB		570	550	220	30	15	620	570	4- Ø12	20.5
YWF -600-FB		620	600	220	30	20	670	610	4- Ø12	25

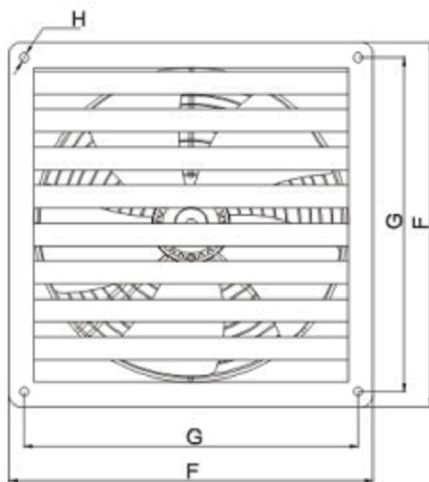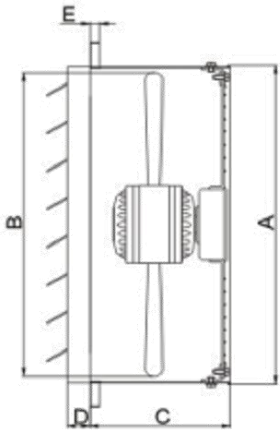




Ø 133MM AC forward curved centrifugal fans


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-2E133-1	230	50	0.40	90	2680	3	2.3	53	185	②
YWF-F-2E133-2	230	50	0.45	95	2520	3	2.3	53	200	①

尺寸图/Dimensions:

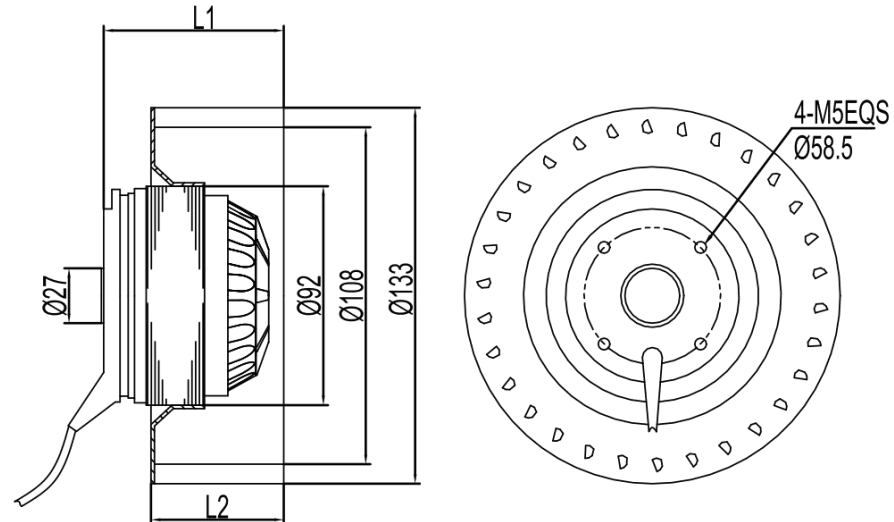

TYPE 型号	L1	L2
YWFF2E133-1	73	49
YWFF2E133-2	97	73

流量曲线/Airflow curves:

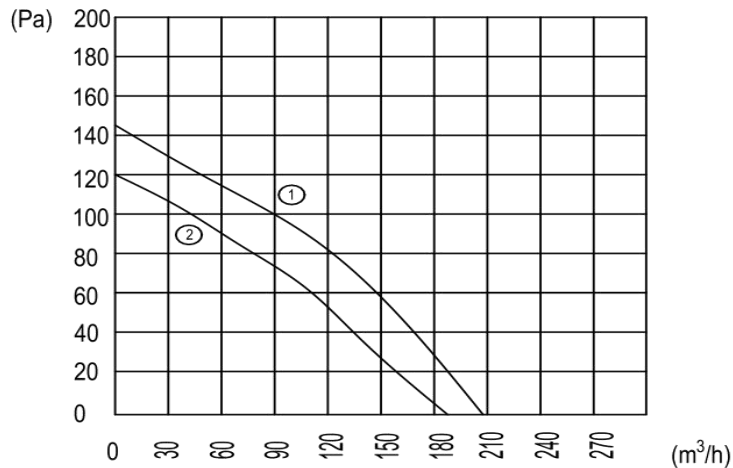





Ø 140MM

AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E140	230	50	0.40	85	1350	3	3.0	53	270	②
YWF-F-2E140	230	50	0.85	110	2620	5	3.0	55	470	①

尺寸图/Dimensions:

流量曲线/Airflow curves:

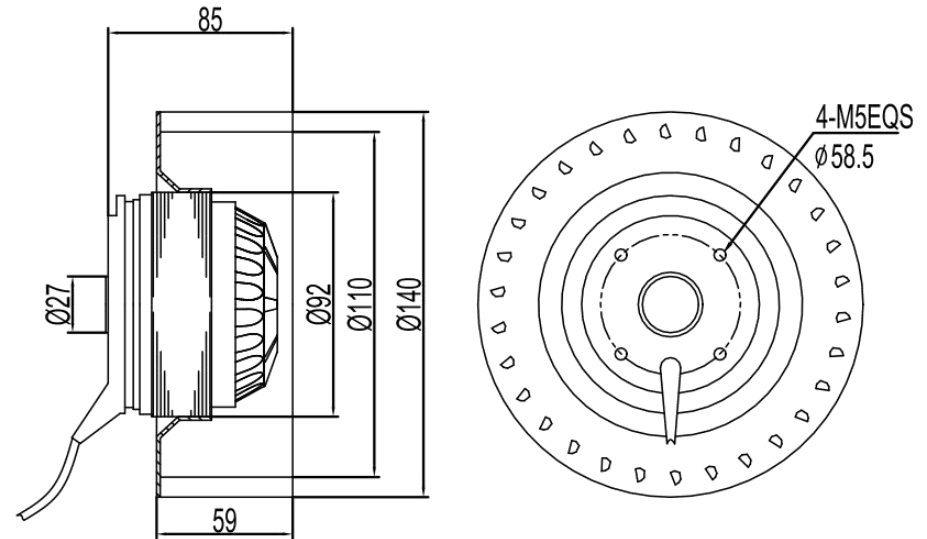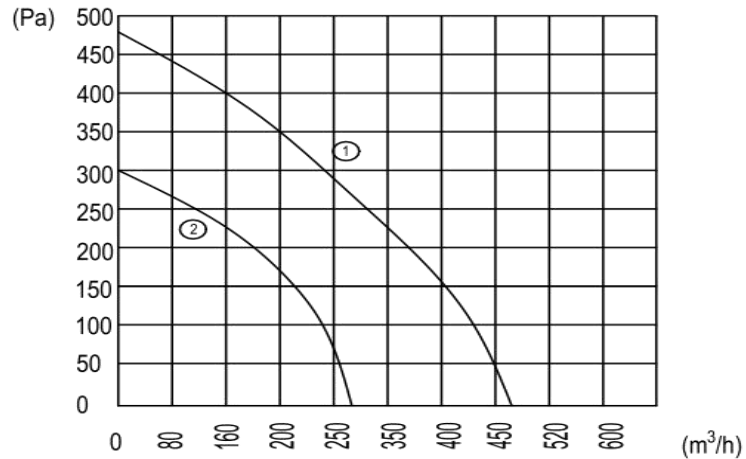






Ø 150MM

AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E150	230	50	0.42	90	1350	3	3.0	50	290	②
YWF-F-2E150	230	50	0.90	120	2620	6	3.0	55	570	①

尺寸图/Dimensions:

流量曲线/Airflow curves:

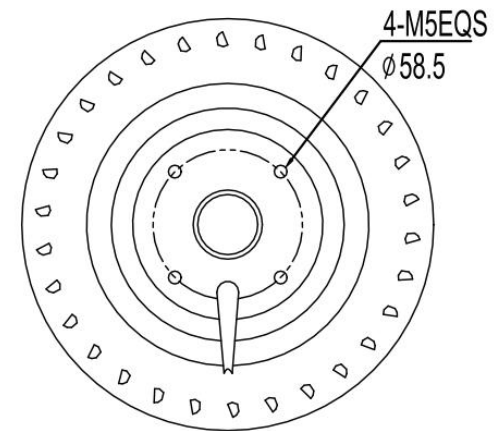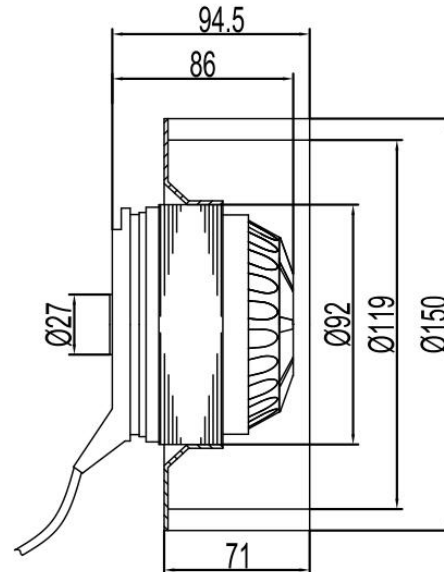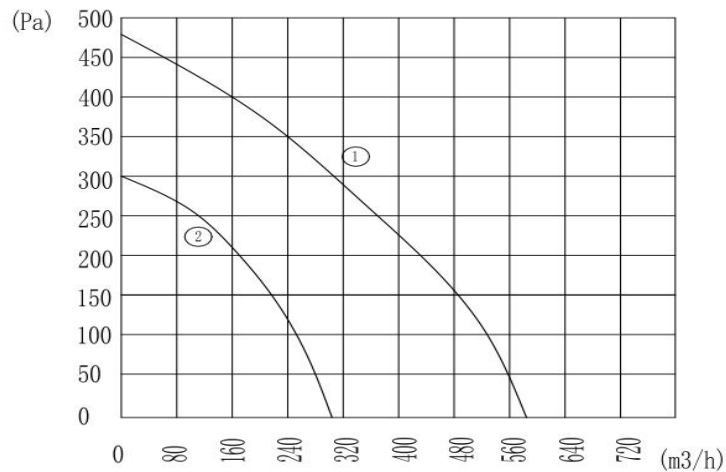




Ø 160MM



AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-2E160-1	230	50	0.44	103	2600	4	3.0	52	400	②
YWF-F-2E160-2	230	50	1.11	210	2620	6	3.0	55	600	①

流量曲线/Airflow curves:

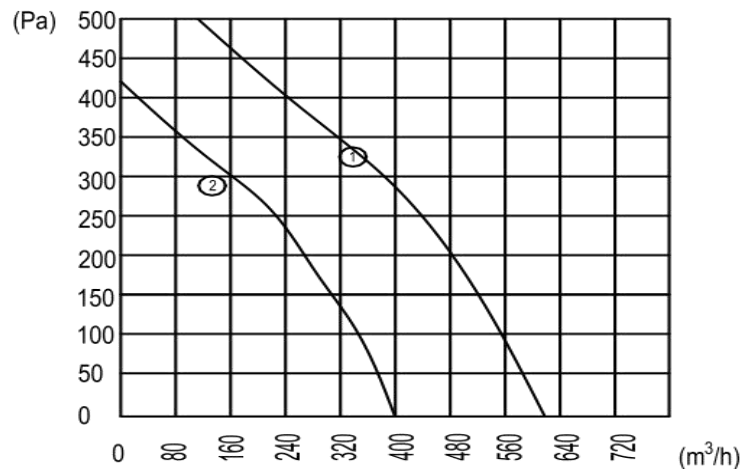

尺寸图/Dimensions:

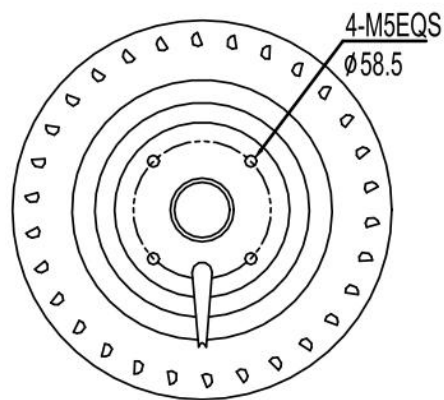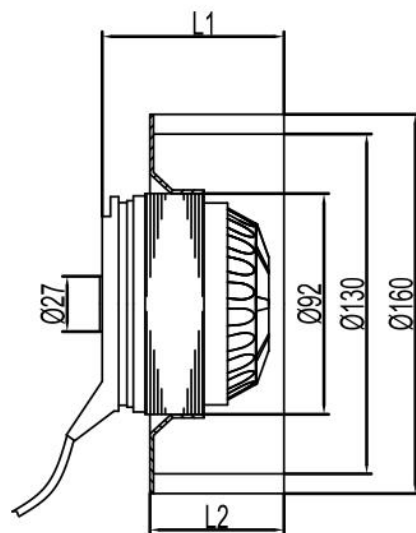

TYPE 型号	L1	L2
YWFF2E160-1	51.5	75
YWFF2E160-2	67	92





Ø 180MM

AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E180	230	50	0.75	180	1400	4	3.3	45	980	②
YWF-F-4D180	380	50	0.45	160	1400	/	3.3	47	1050	①

尺寸图/Dimensions:

流量曲线/Airflow curves:

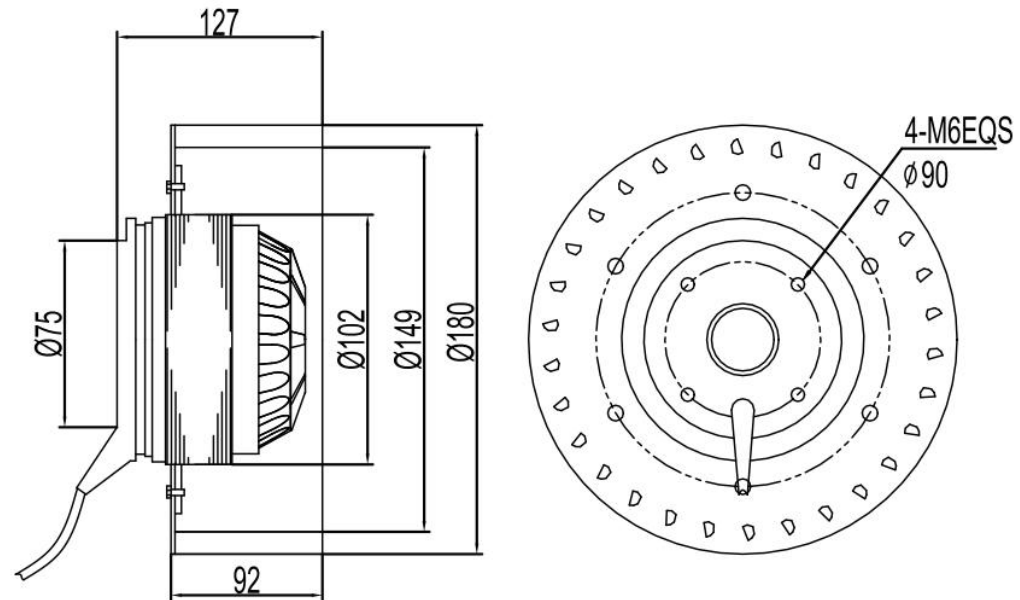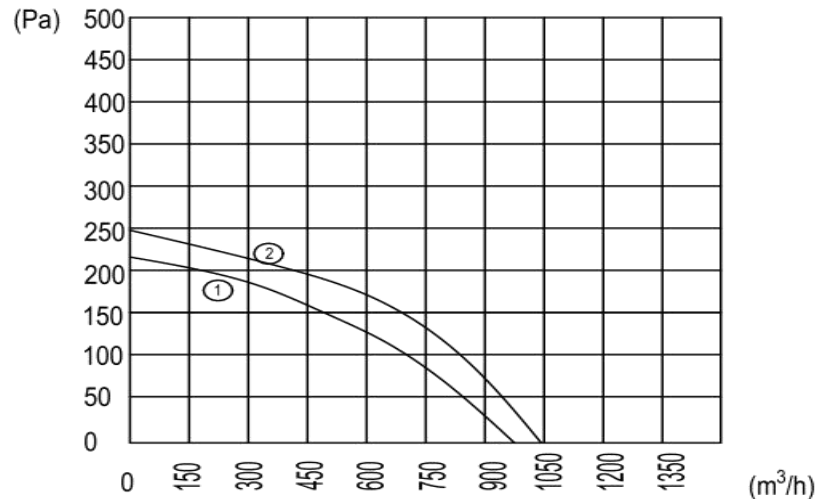





Ø 200MM

AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E200	230	50	0.90	190	1380	6	3.5	53	1350	②
YWF-F-4D200	380	50	0.50	190	1400	/	3.5	53	1380	①

尺寸图/Dimensions:

流量曲线/Airflow curves:

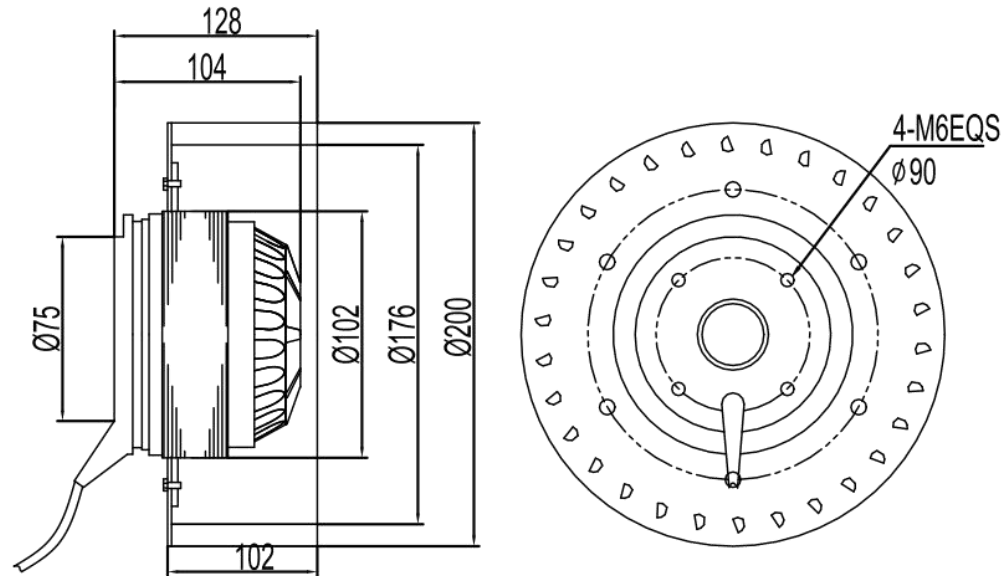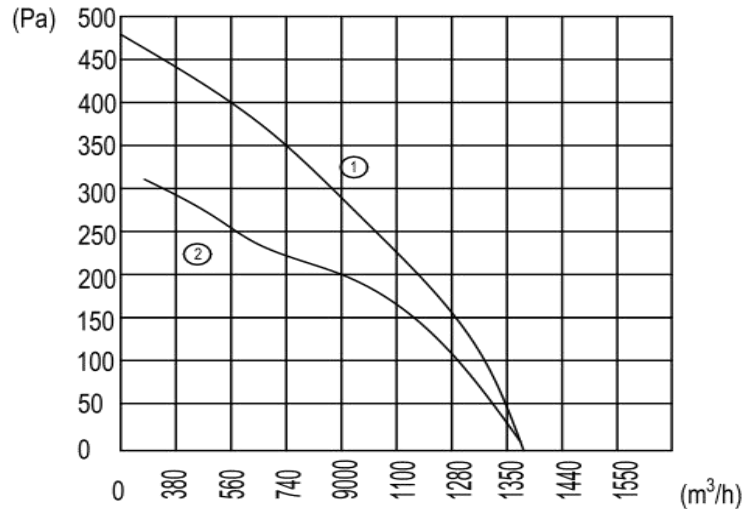





Ø 250MM

AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E250	230	50	3.70	550	1350	12	13.5	69	2350	②
YWF-F-4D250	380	50	1.50	560	1350	/	13.5	69	2380	①

尺寸图/Dimensions:

流量曲线/Airflow curves:

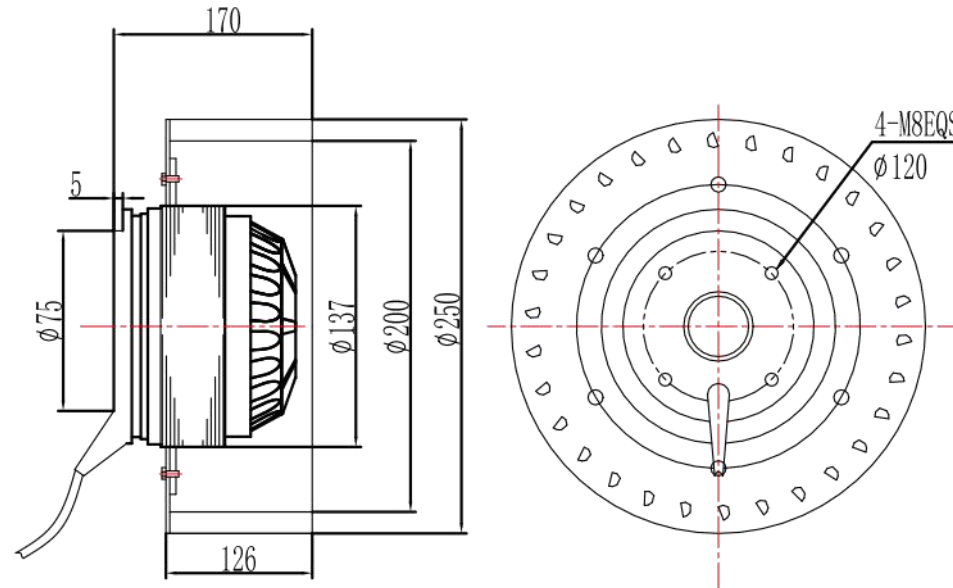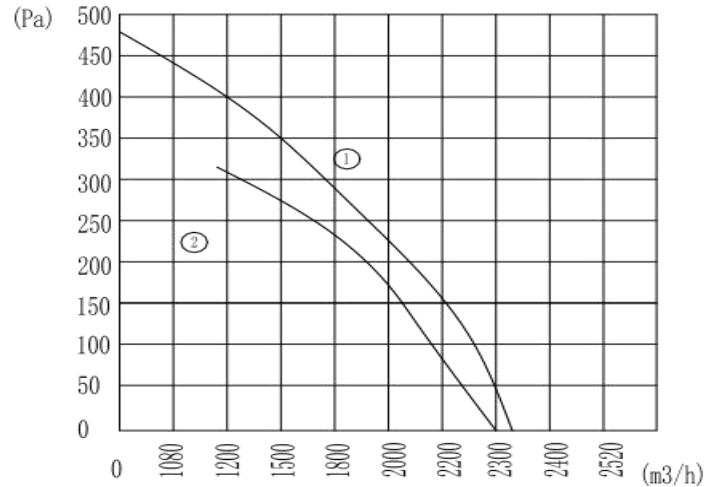




Ø 280MM


AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E280	230	50	3.70	850	1350	16	13.5	70	2950	②
YWF-F-4D280	380	50	1.50	860	1350	/	13.5	70	3080	①

尺寸图/Dimensions:

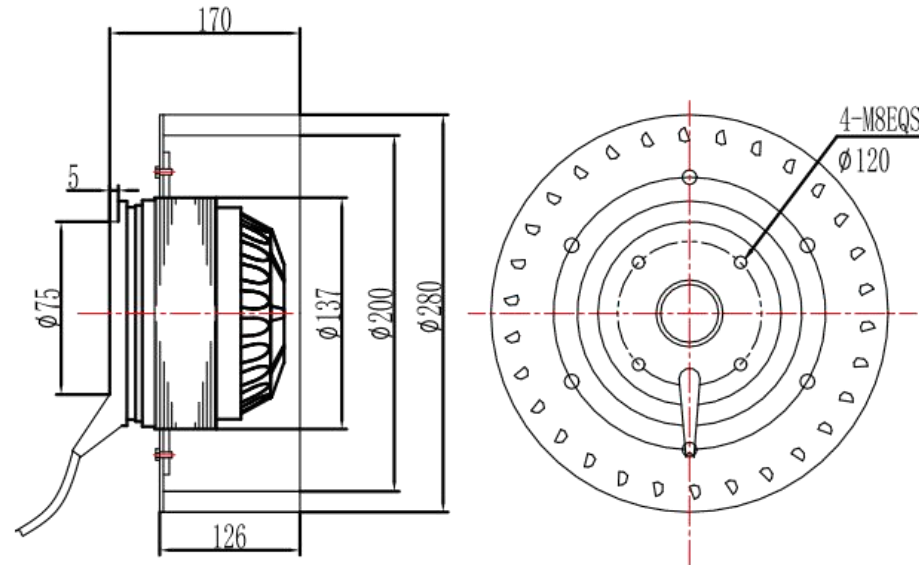

流量曲线/Airflow curves:

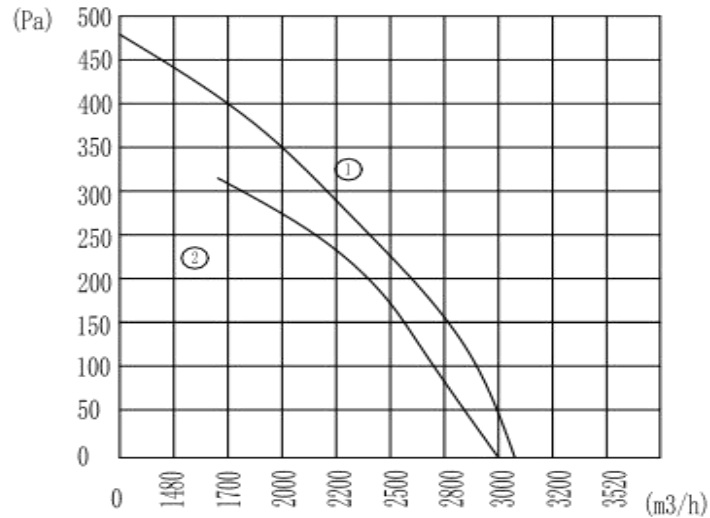





Ø 315MM AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4D315	380	50	2.50	1100	1350	/	20.00	75	4140	①
YWF-F-6D315	380	50	1.50	760	910	/	20.00	65	3080	②

尺寸图/Dimensions:

流量曲线/Airflow curves:

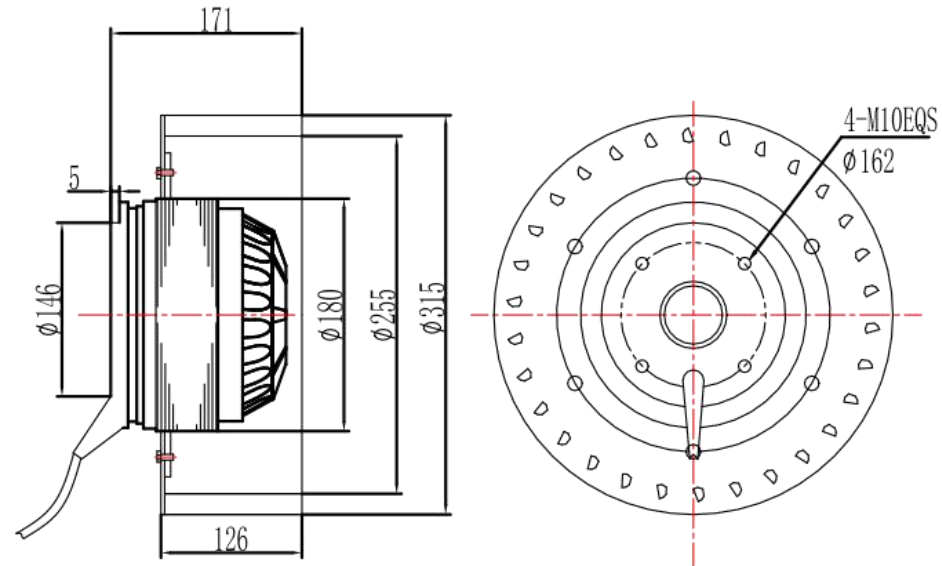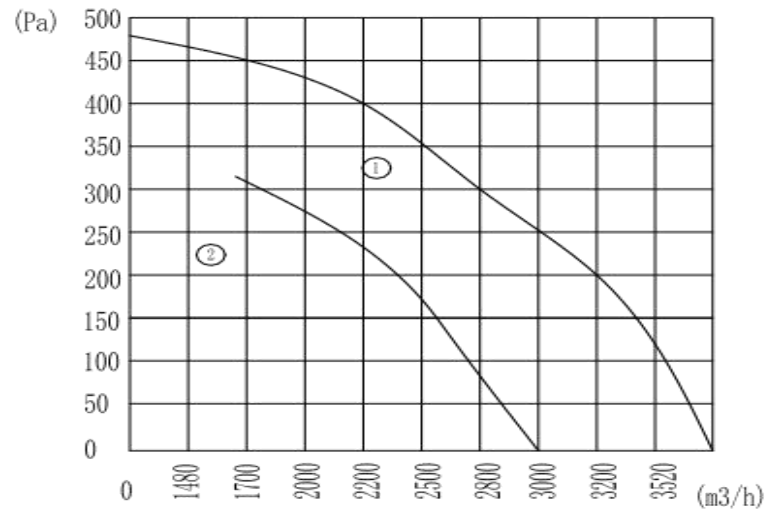





Ø 350MM

AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4D350	380	50	5.50	2200	1350	/	20.00	78	5140	①
YWF-F-6D350	380	50	2.50	1100	900	/	20.00	70	4080	②

尺寸图/Dimensions:

流量曲线/Airflow curves:

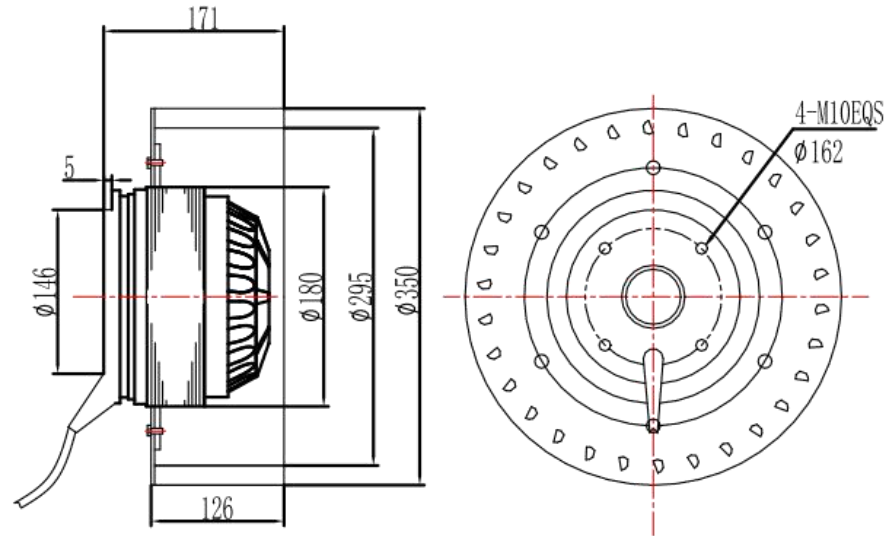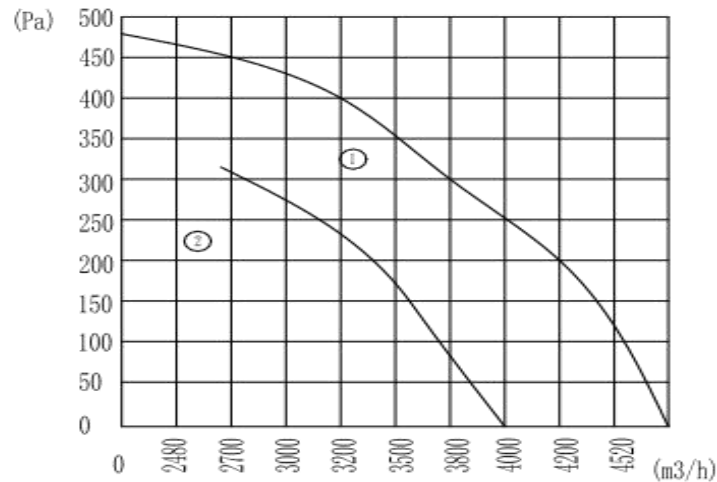





Ø 400MM

AC forward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4D400	380	50	7.80	3700	1350	/	30.00	82	7140	①
YWF-F-6D400	380	50	3.50	2200	900	/	30.00	75	6080	②

尺寸图/Dimensions:

流量曲线/Airflow curves:

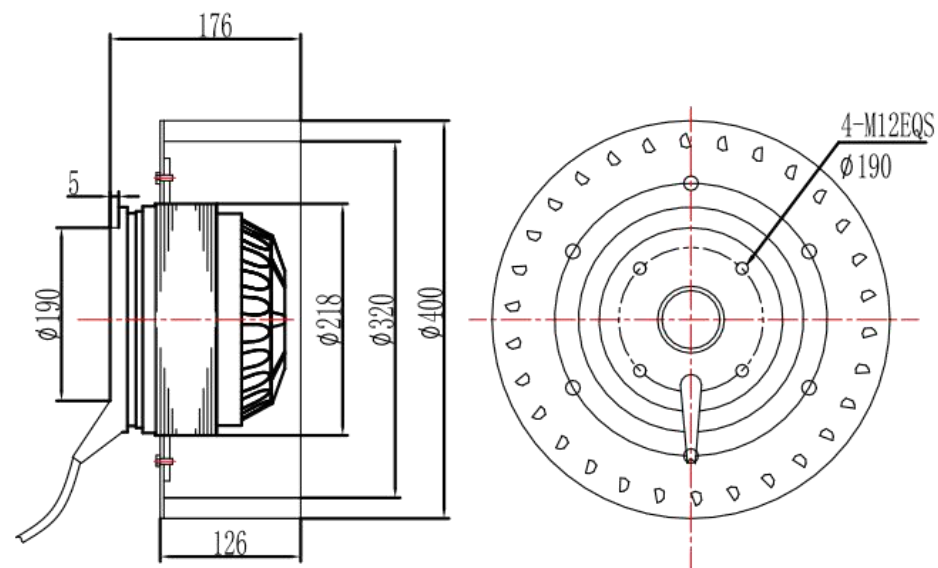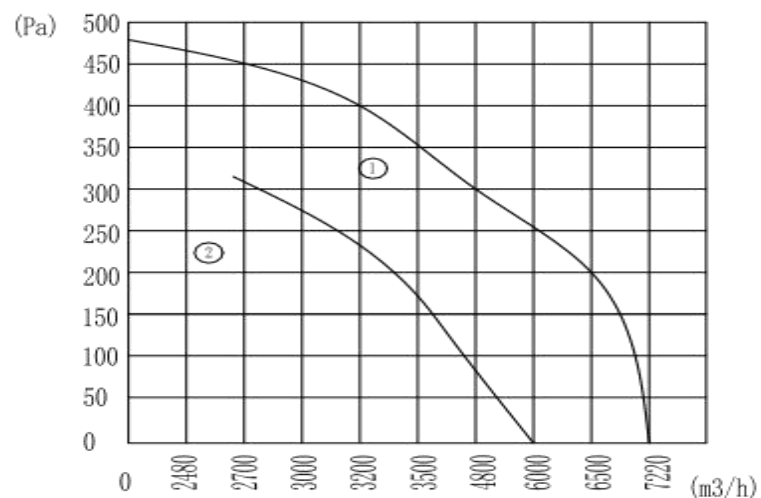




Ø190MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E190	230	50	0.23	40	1380	2	1.6	50	380	①
YWF-B-2E190	230	50	0.27	63	2550	2	1.6	50	550	②

流量曲线/Airflow curves:

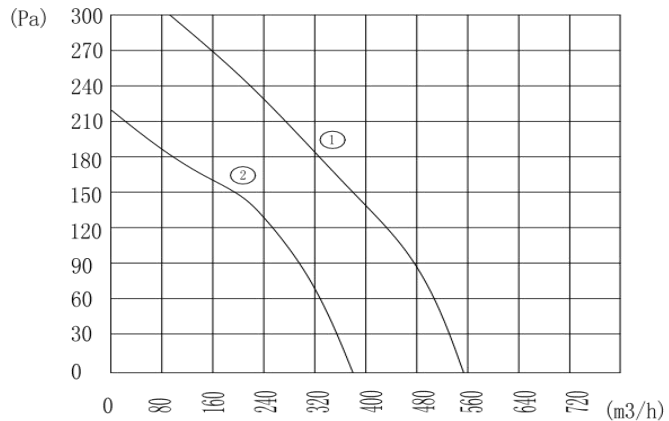

尺寸图/Dimensions:

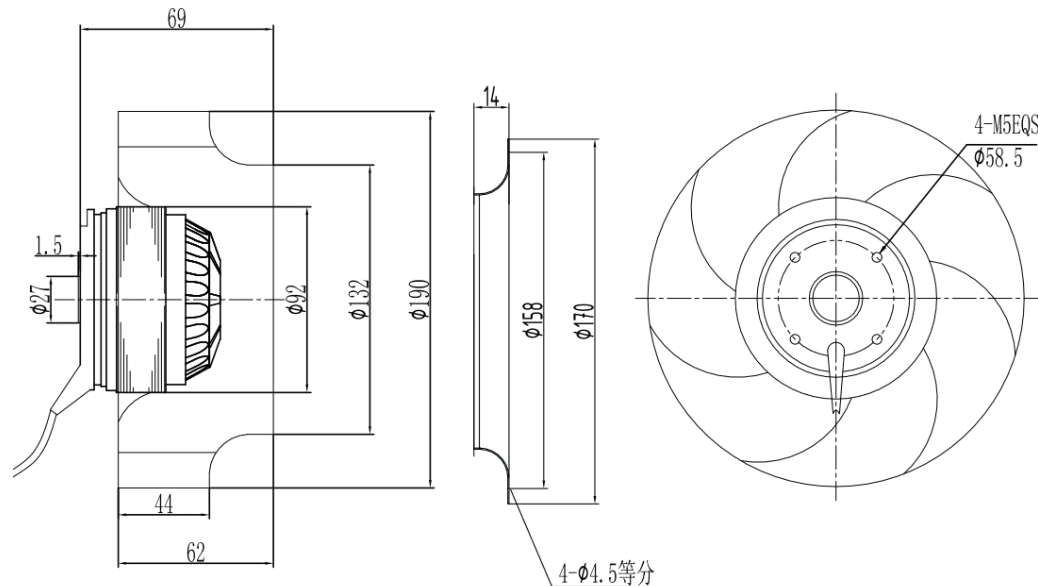




Ø220MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E220	230	50	0.25	50	1400	2	2.6	53	644	①
YWF-B-2E220	230	50	0.44	101	2550	3	2.6	73	1200	②

流量曲线/Airflow curves:

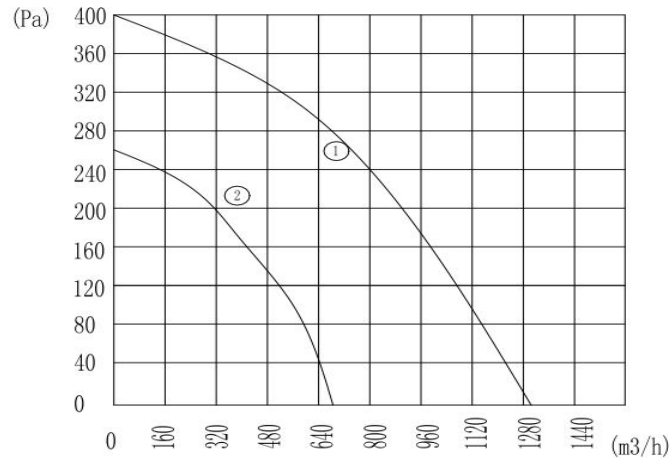

尺寸图/Dimensions:

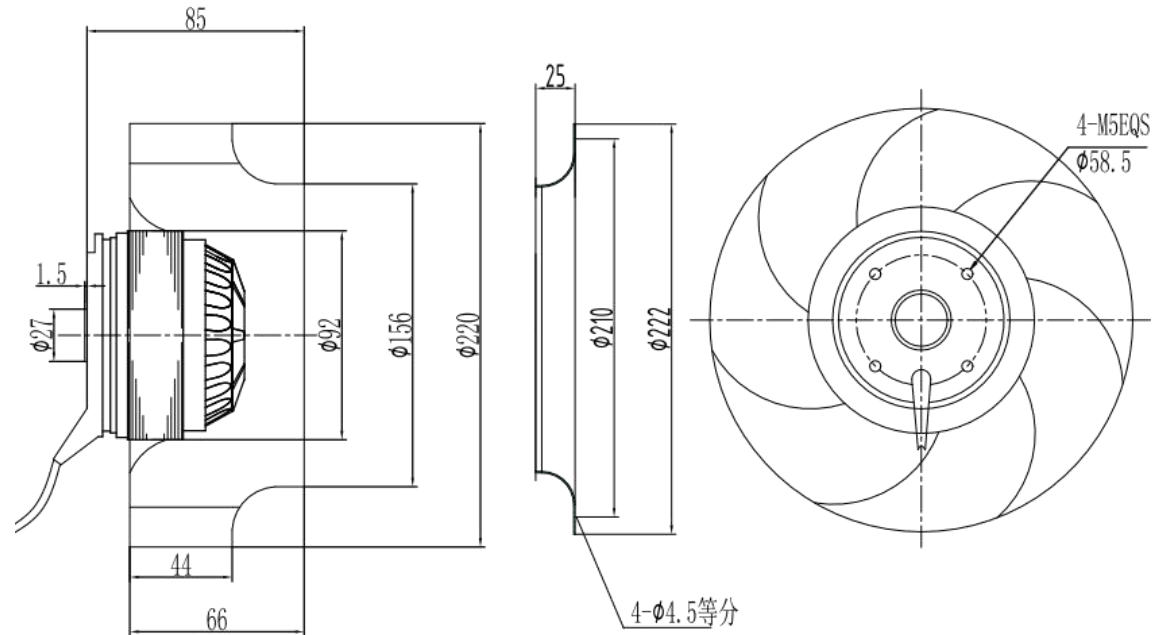




Ø220MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E220	230	50	0.26	55	1400	2	2.6	59	744	①
YWF-B-2E220	230	50	0.44	115	2550	3	2.6	73	1350	②

流量曲线/Airflow curves:

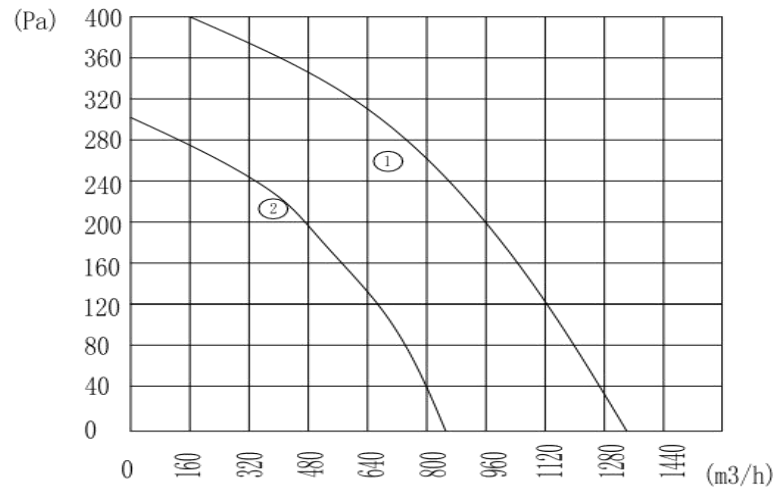

尺寸图/Dimensions:

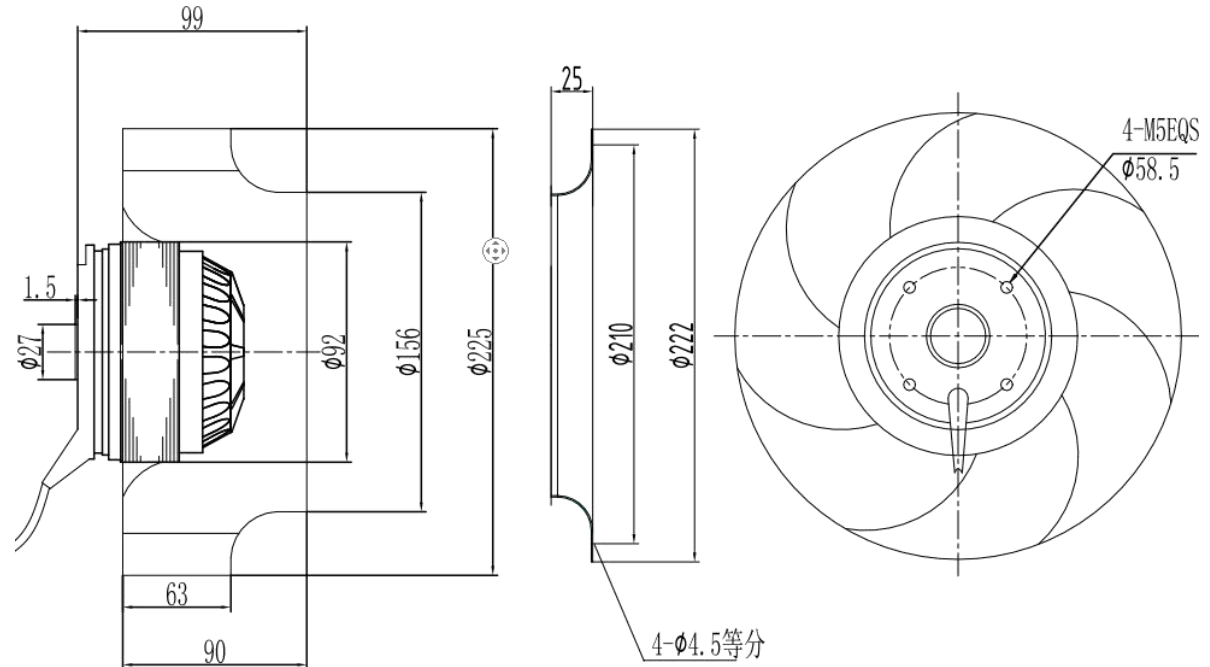




Ø250MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E250	230	50	0.25	50	1380	2	3.2	56	830	①
YWF-B-2E250	230	50	0.88	180	2600	6	3.2	74	1580	②

流量曲线/Airflow curves:

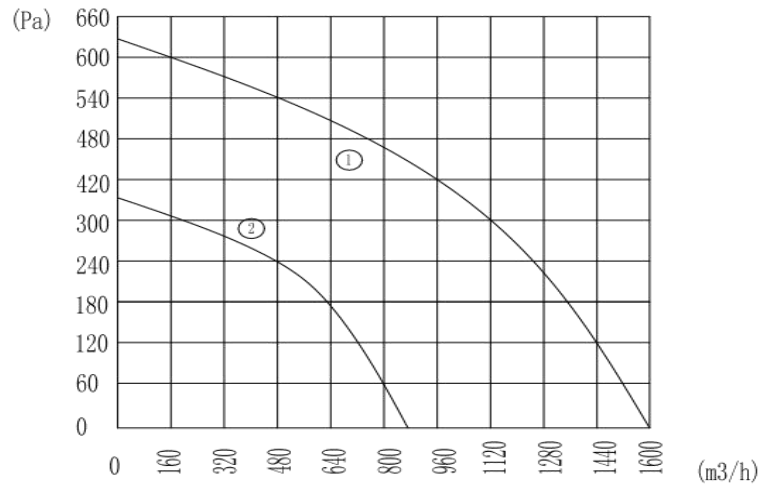

尺寸图/Dimensions:

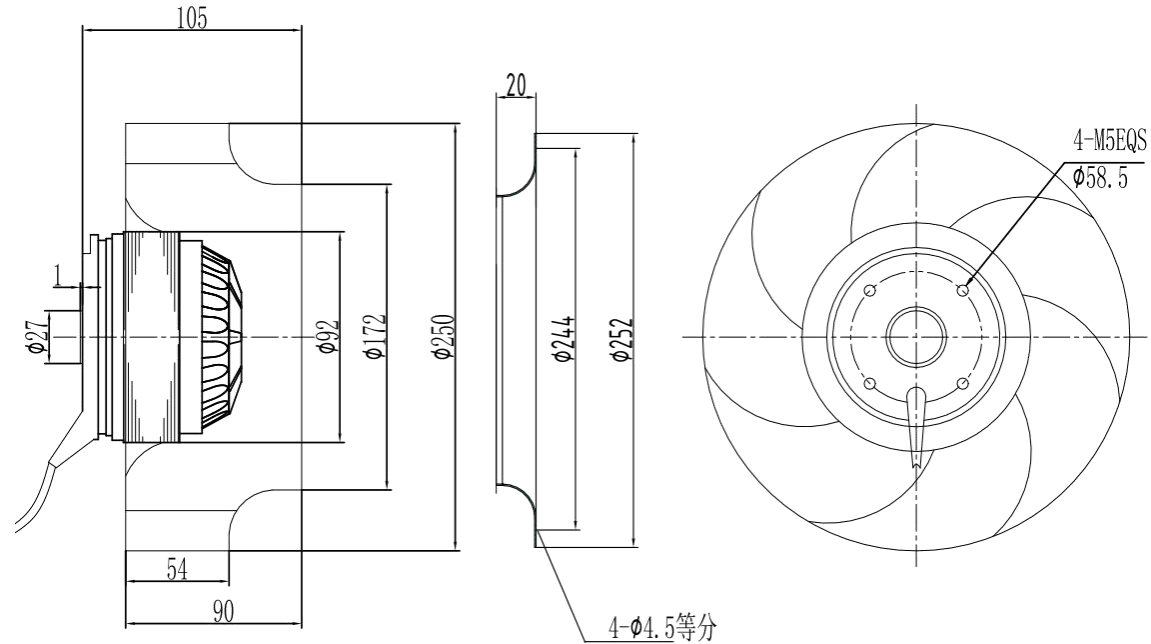




Ø280MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-2D280	380	50	0.80	500	2700	/	5.0	78	1900	①
YWF-B-2E280	230	50	1.60	500	2700	20	5.0	78	1900	②

流量曲线/Airflow curves:

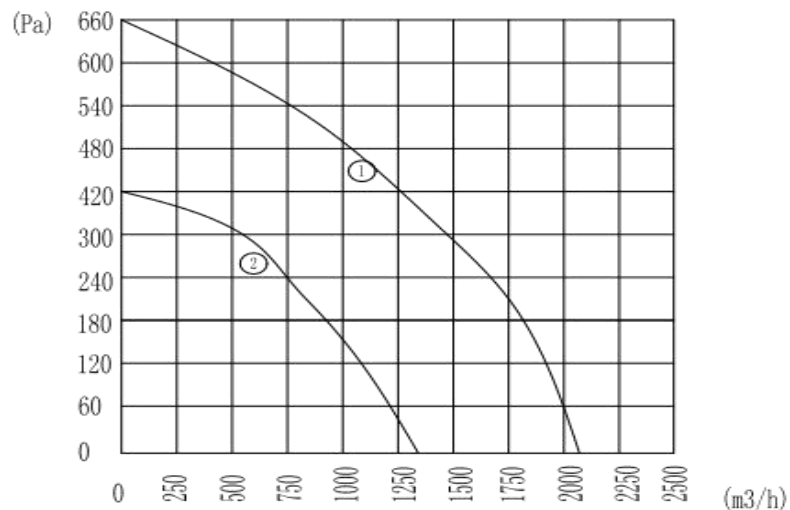

尺寸图/Dimensions:

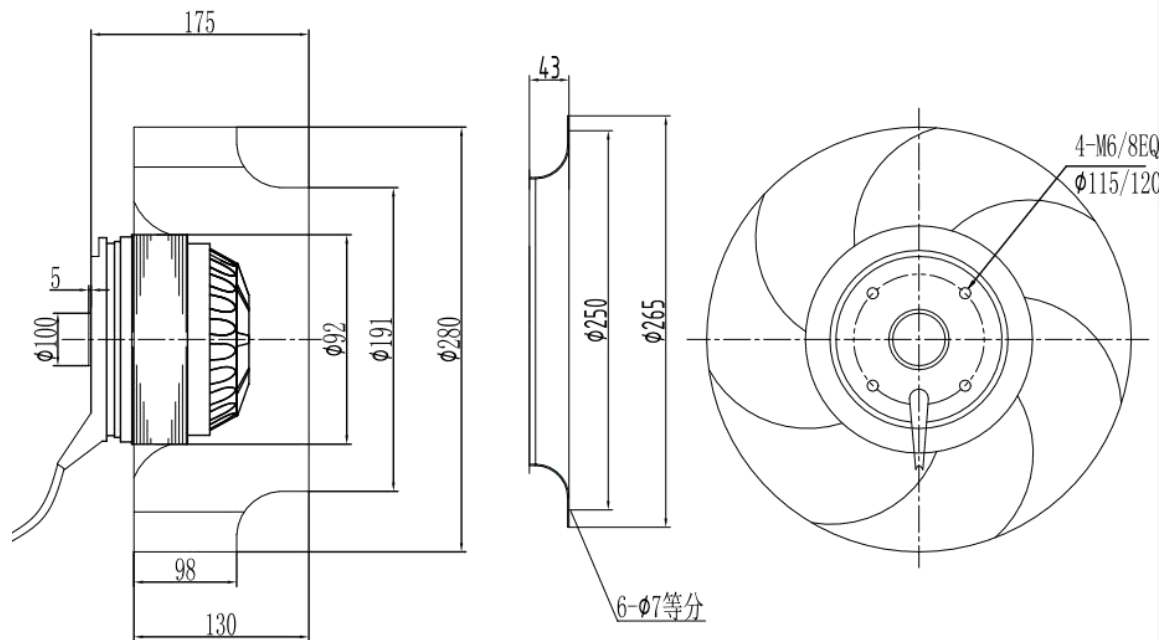




Ø280MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E280	230	50	0.42	85	1360	3	3.3	62	1150	①
YWF-B-2E280	230	50	0.94	210	2500	6	3.3	75	1900	②

流量曲线/Airflow curves:

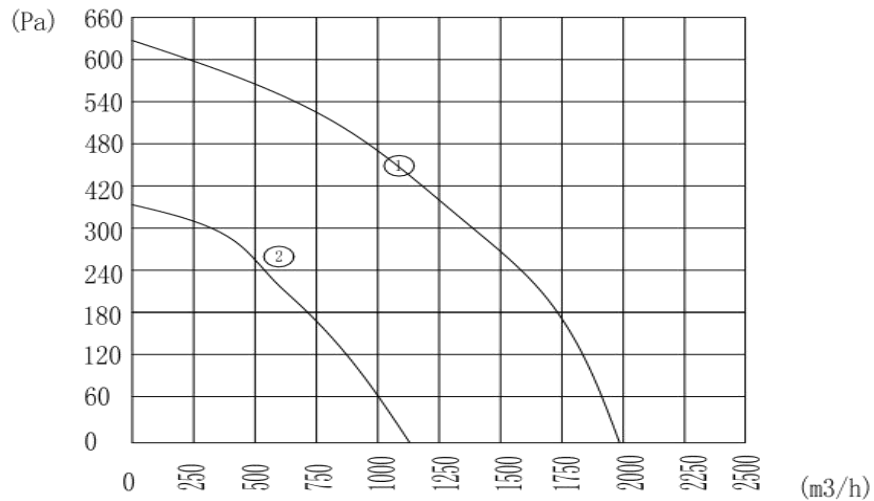

尺寸图/Dimensions:

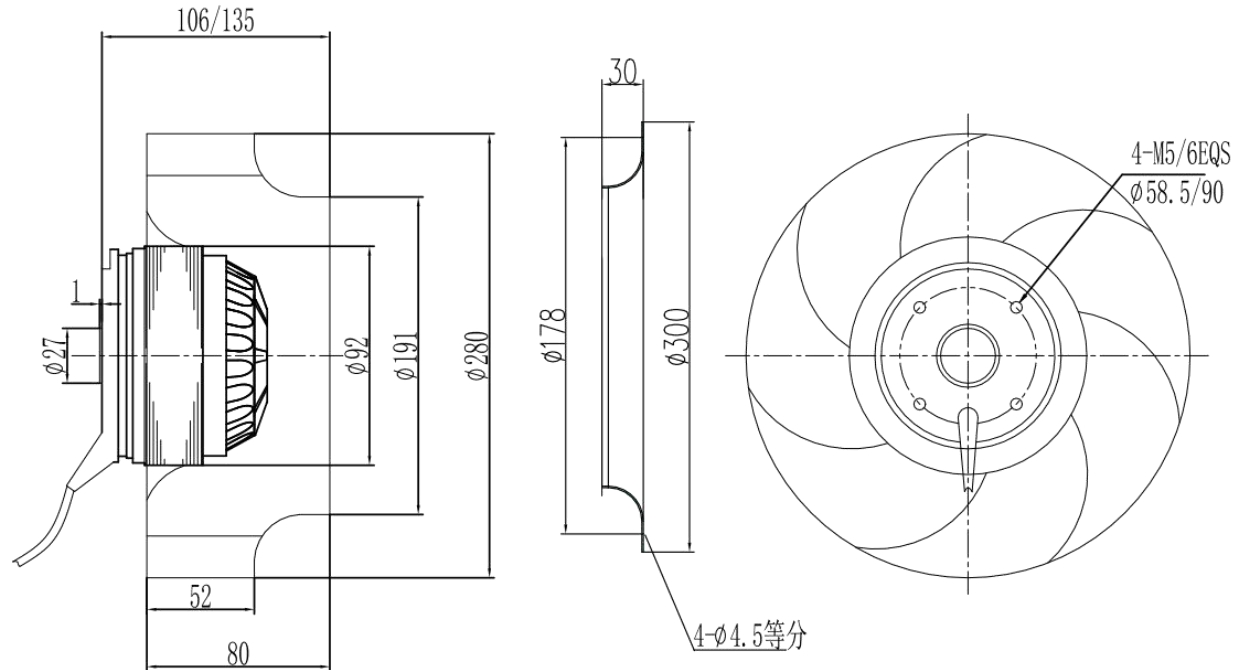




Ø315MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E315	230	50	0.80	150	1420	4	3.7	65	2100	①
YWF-B-4D315	380	50	0.45	137	1420	/	3.7	65	2100	②
YWF-B-6E315	230	50	0.25	50	950	3	3.7	62	1400	③

尺寸图/Dimensions:

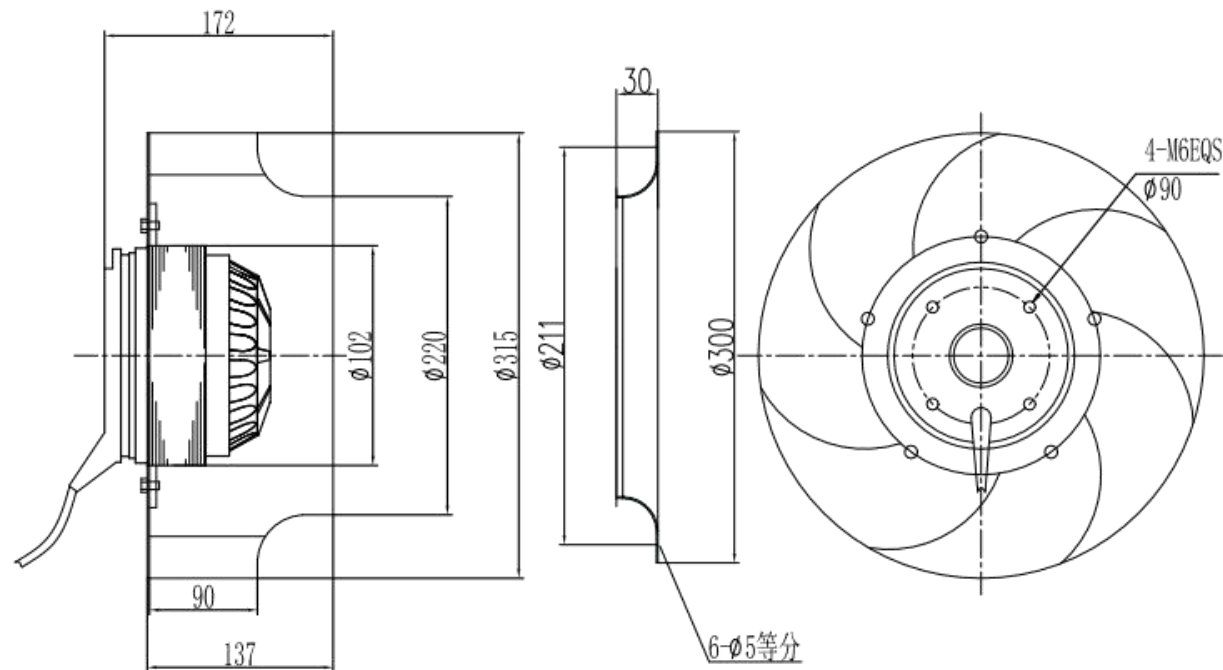

流量曲线/Airflow curves:

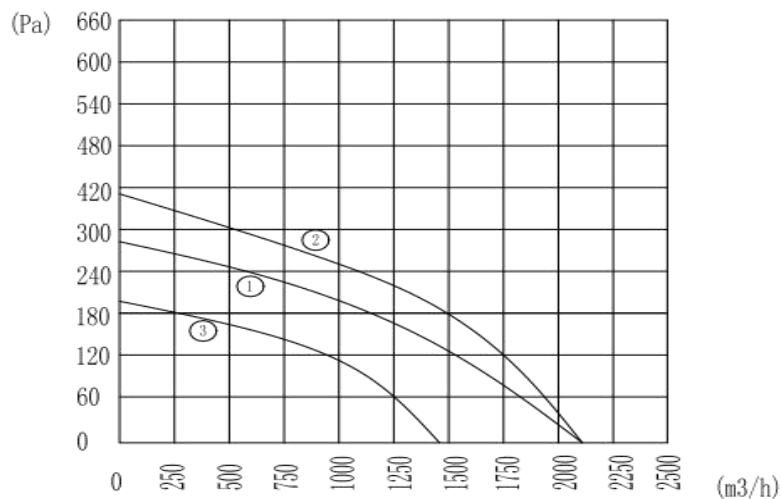




Ø355MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E355	230	50	0.78	165	1400	6	4.6	65	2350	①
YWF-B-4D355	380	50	0.50	155	1400	/	4.6	65	2350	②
YWF-B-6E355	230	50	0.30	65	950	4	4.6	55	1600	③

尺寸图/Dimensions:

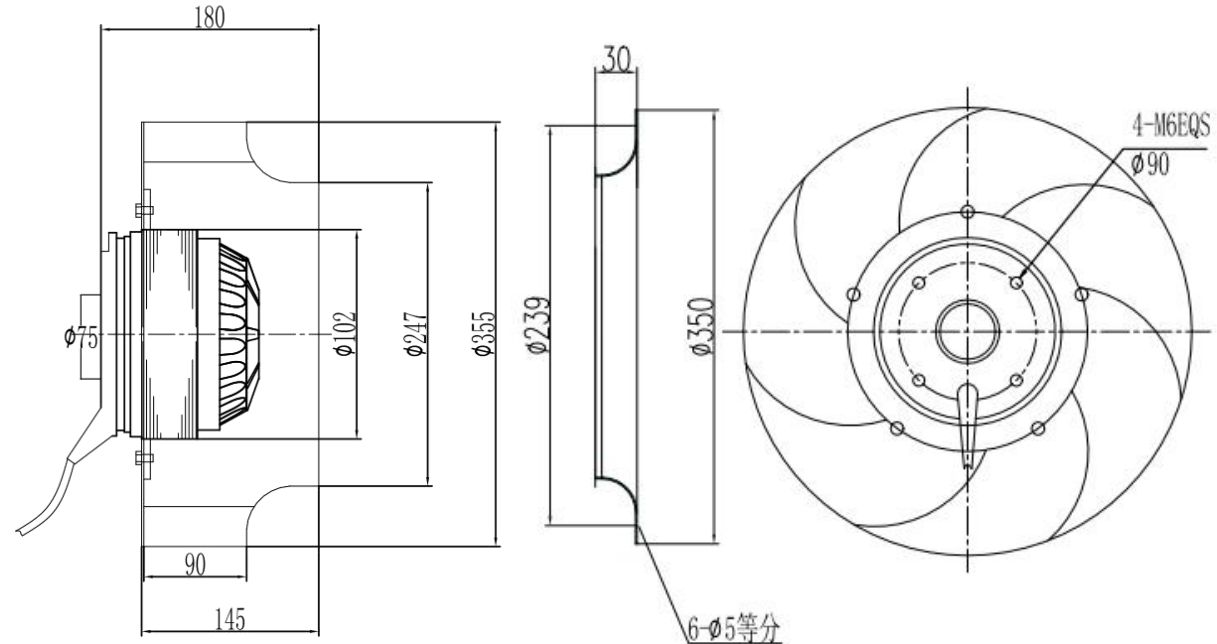

流量曲线/Airflow curves:

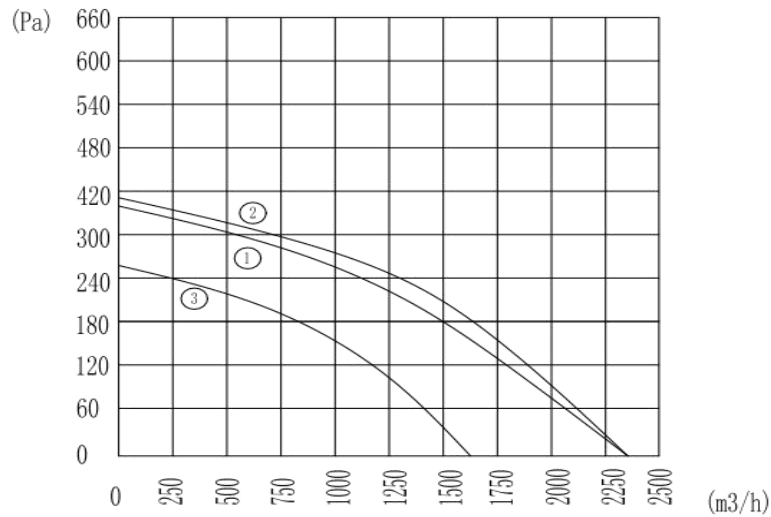




Ø400MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E400	230	50	1.50	310	1360	8	5.8	68	3200	①
YWF-B-4D400	380	50	0.70	305	1380	/	5.8	68	3200	②
YWF-B-6E400	230	50	0.75	145	950	6	5.8	63	2200	③

流量曲线/Airflow curves:

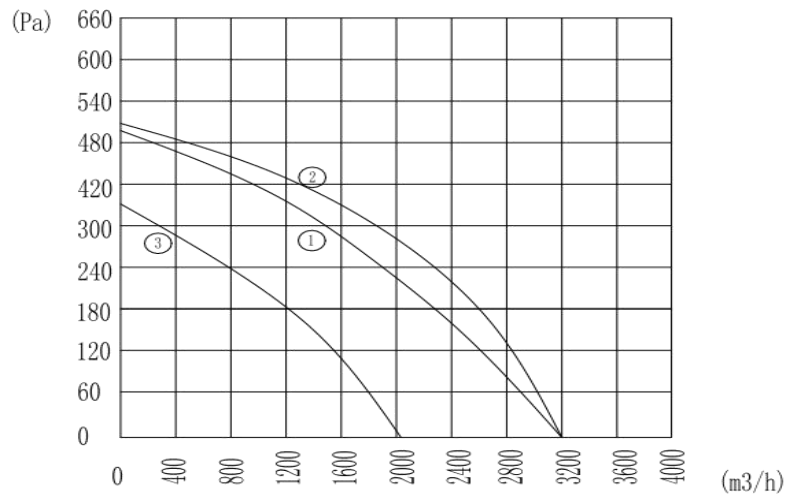

尺寸图/Dimensions:

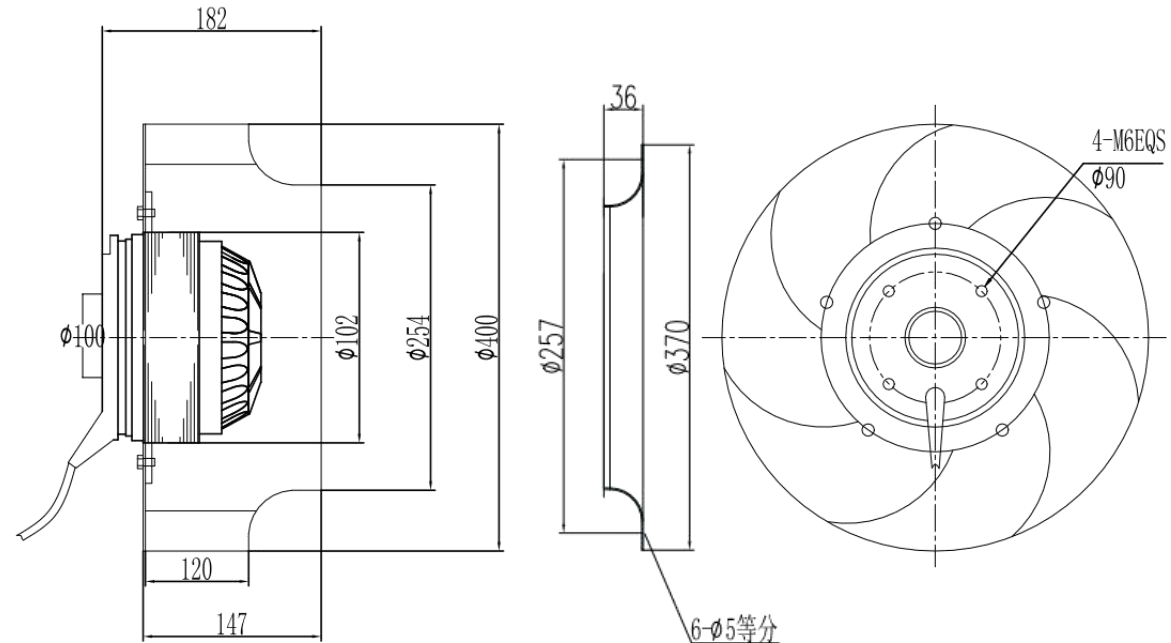





Ø400MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E400	230	50	1.50	310	1360	8	5.8	68	4400	①
YWF-B-4D400	380	50	0.70	305	1380	/	5.8	68	4400	②
YWF-B-6E400	230	50	0.75	145	950	6	5.8	63	3200	③

尺寸图/Dimensions:

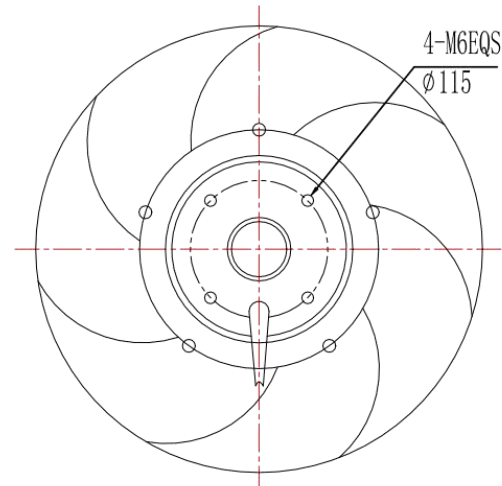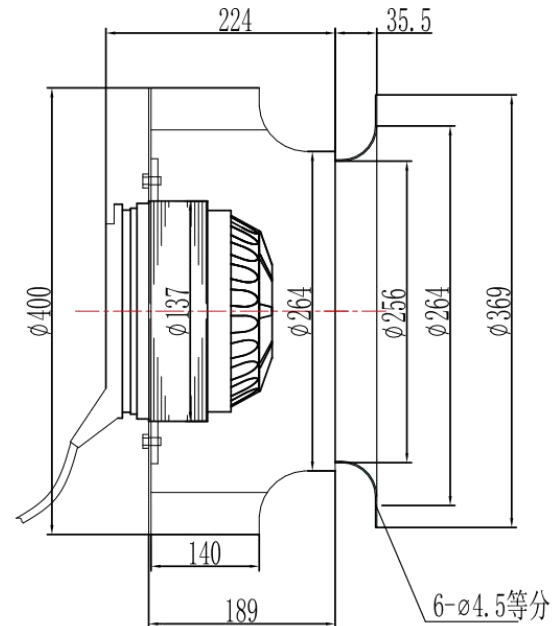

流量曲线/Airflow curves:

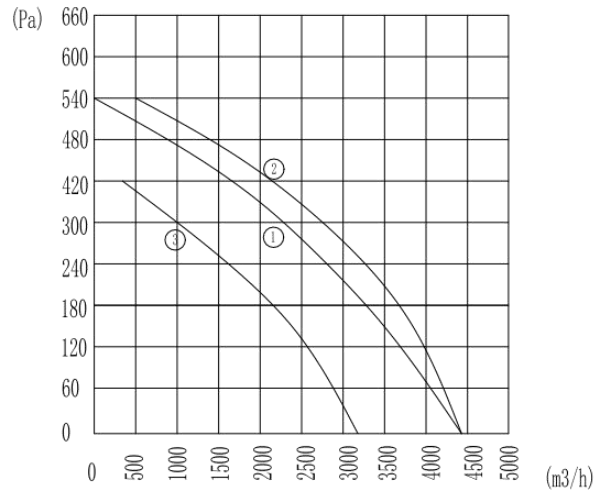




Ø450MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4E450	230	50	2.20	540	1320	12	5.8	68	5600	①
YWF-B-4D450	380	50	1.07	535	1320	/	5.8	68	5600	②
YWF-B-6E450	230	50	1.35	265	930	12	5.8	63	3100	③
YWF-B-6D450	380	50	1.00	305	930	/	5.8	63	3100	④

流量曲线/Airflow curves:

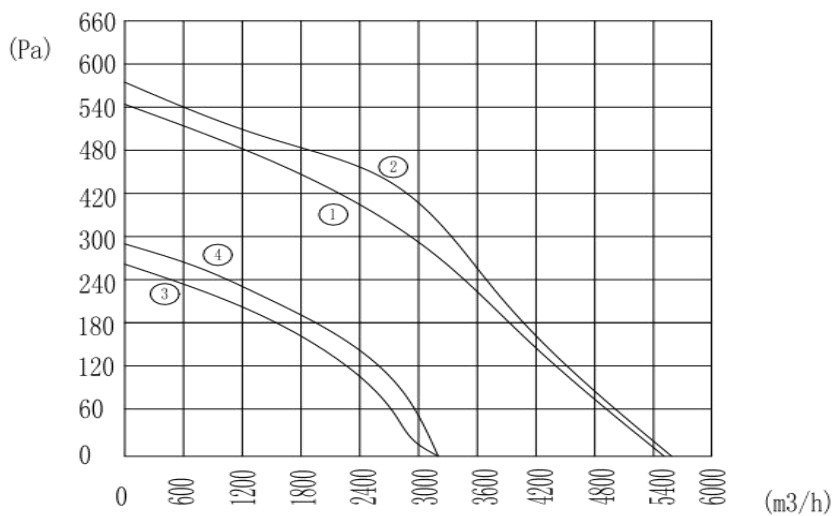

尺寸图/Dimensions:

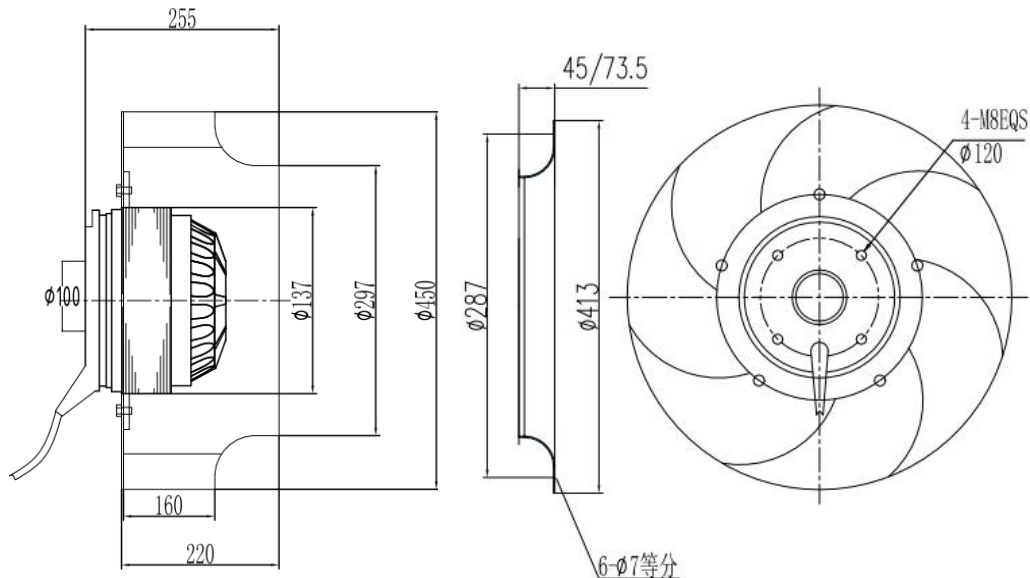




Ø500MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4D500	380-Δ	50	2.50	1100	1400	/	20.00	75	8000	①
YWF-B-4D500	380-Y	50	1.80	1000	1200	/	20.00	73	7000	②
YWF-B-6D500	380	50	1.25	450	950	/	20.00	62	5200	③

流量曲线/Airflow curves:

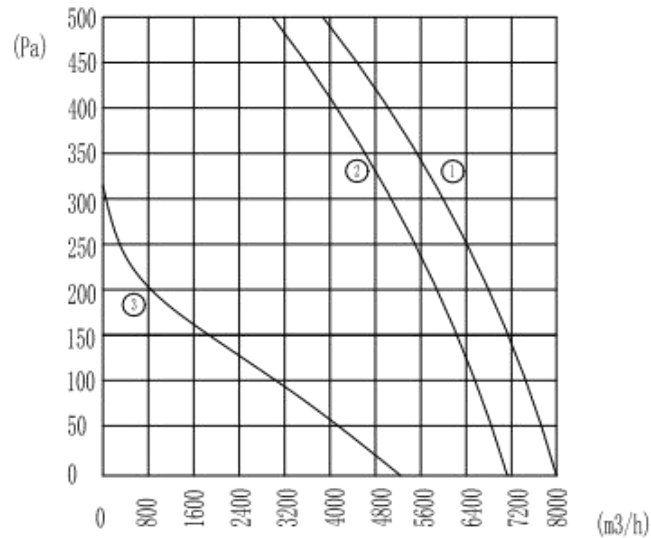

尺寸图/Dimensions:

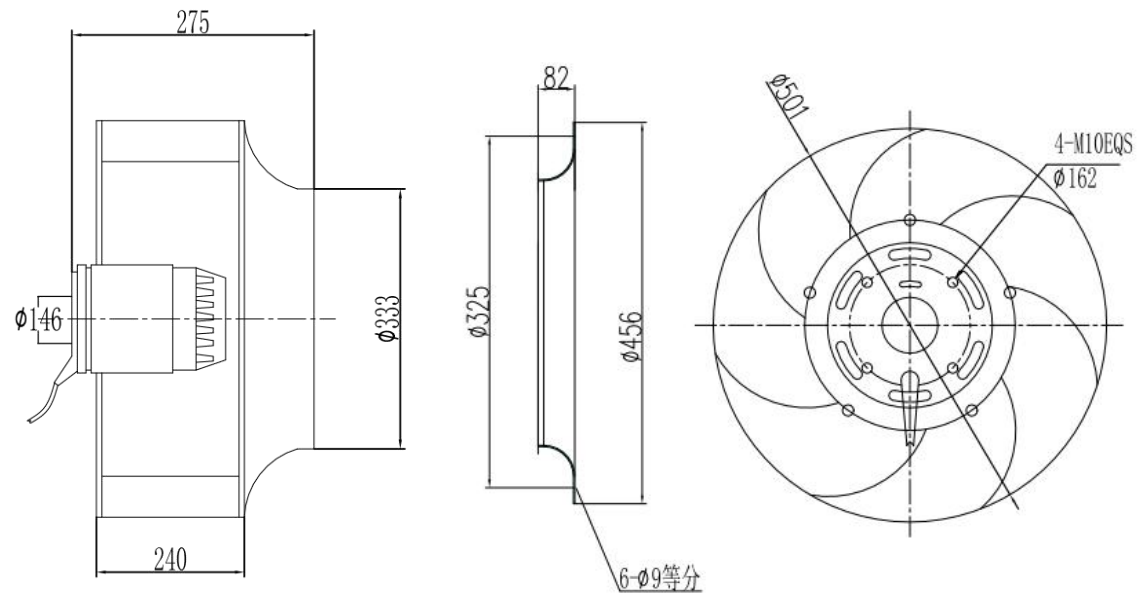




Ø500MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4D500	380/400	50	2.60	1500	1400	/	20.00	80	9500	①

尺寸图/Dimensions:

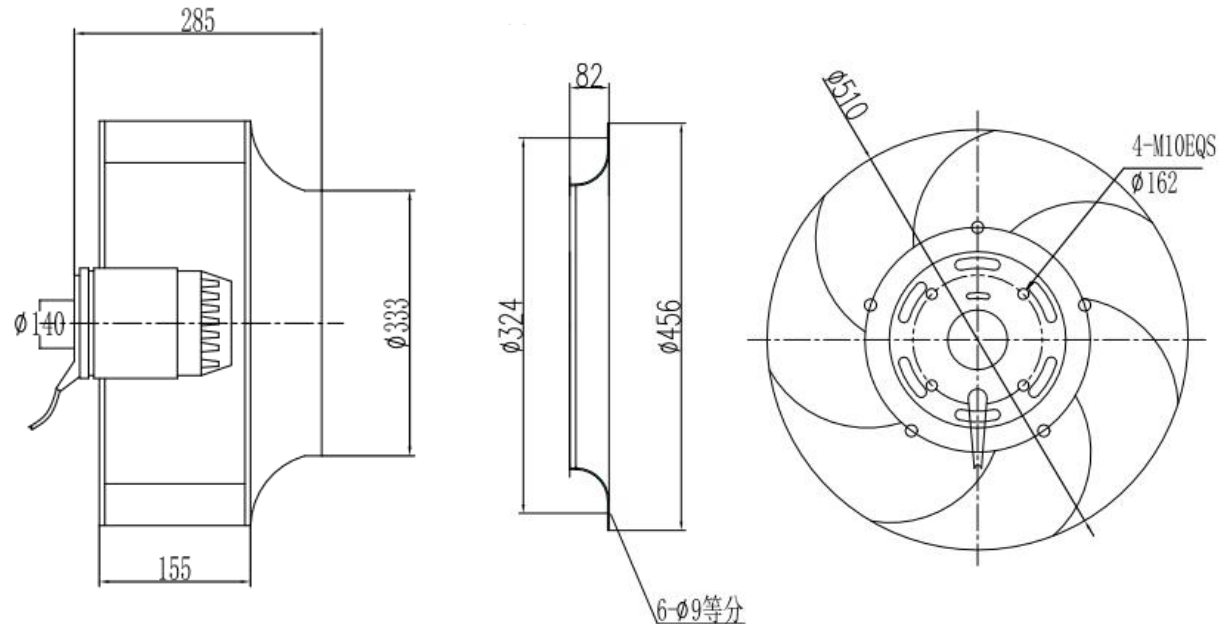

流量曲线/Airflow curves:

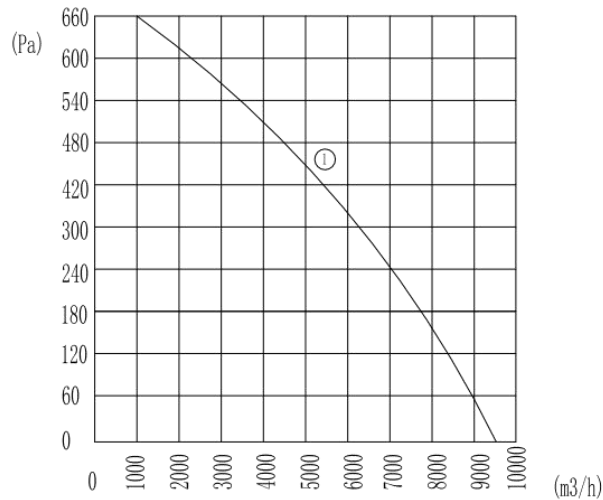




Ø560MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4D560	380-Δ	50	4.50	2200	1420	/	22.00	77	11000	①
YWF-B-4D560	380-Y	50	3.50	2000	1200	/	22.00	76	9000	②
YWF-B-6D560	380	50	1.80	800	920	/	22.00	65	8500	③

流量曲线/Airflow curves:

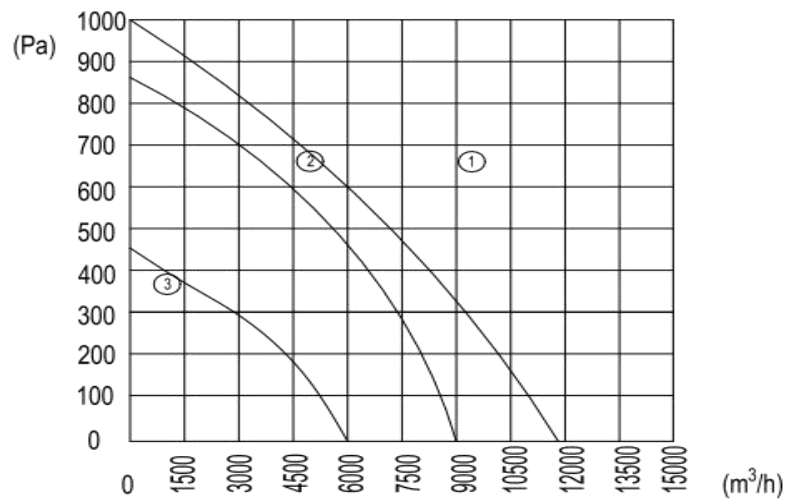

尺寸图/Dimensions:

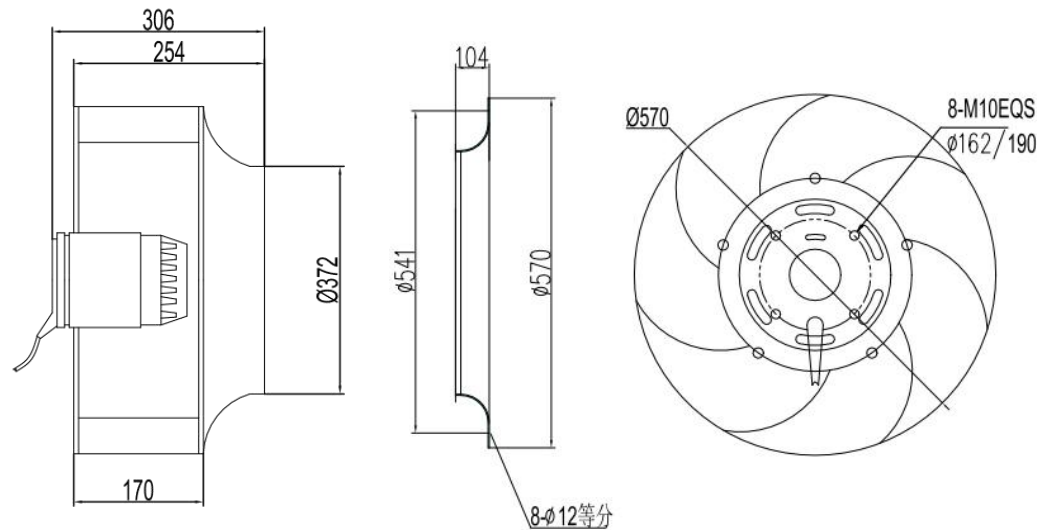




Ø630MM


AC backward curved centrifugal fans

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-B-4D630	380-Δ	50	7.00	3700	1420	/	25.00	80	14700	①
YWF-B-4D630	380-Y	50	4.50	2200	1200	/	25.00	70	11000	②
YWF-B-6D630	380-Δ	50	3.80	1500	920	/	25.00	77	12000	③
YWF-B-6D630	380-Y	50	1.80	750	700	/	25.00	77	10000	④

流量曲线/Airflow curves:

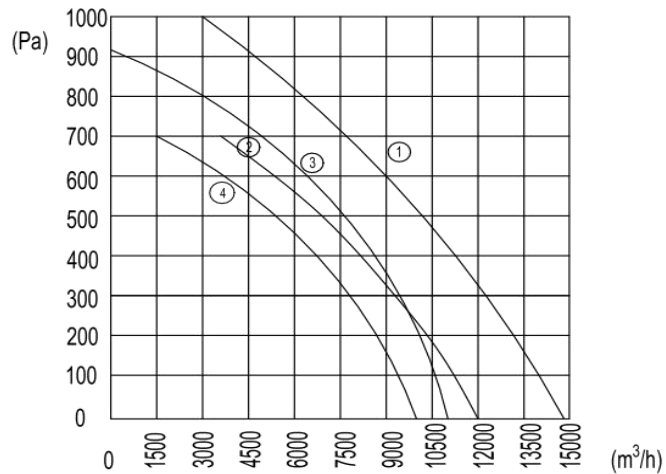

尺寸图/Dimensions:

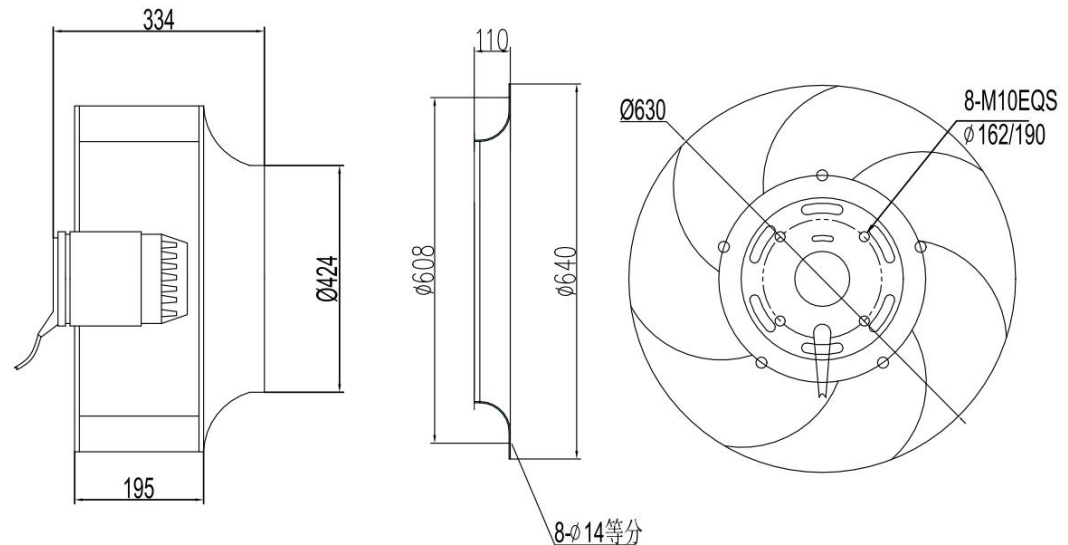




Ø 130-150MM AC Single Inlet Forward Centrifugal Fans



型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-2E130A	230	50	0.45	100	2400	3	2.4	60	300	①
YWF-F-2E130A	230	60	0.54	124	2600	3	2.4	70	330	②
YWF-F-4E150A	230	50	0.40	85	1400	3	3.8	55	330	③
YWF-F-2E150A	230	50	0.95	200	2560	6	3.8	65	660	④

流量曲线/Airflow curves:

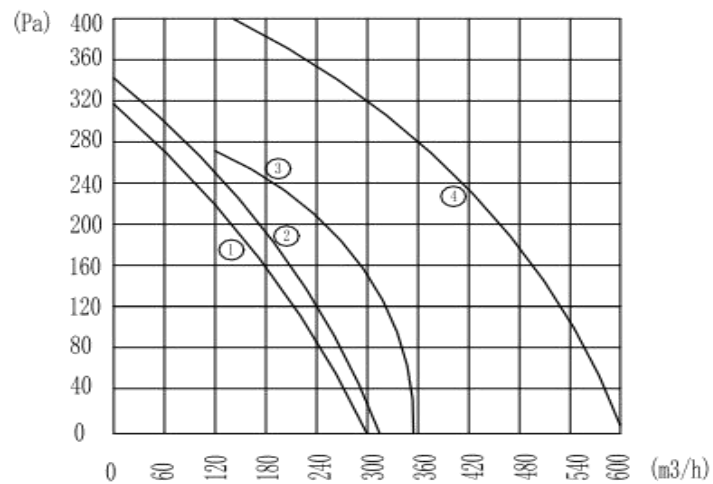

尺寸图/Dimensions:

型号	A	B	C	D	E	F	G	H	I
YWFF2E130	115	96	86	115	96	69	88	181	174
YWFF2E150	115	101	87	115	101	87	90	207	207

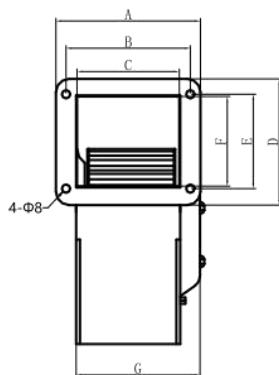




Ø 140-160MM AC Single Inlet Forward Centrifugal Fans



型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-2E140A	230	50	0.45	100	2500	3	3.5	65	450	①
YWF-F-2D140A	380	50	0.25	124	2500	/	3.5	65	450	②
YWF-F-4E160A	230	50	0.82	100	1400	6	4.2	55	450	③
YWF-F-2E160A	230	50	1.20	220	2560	10	4.2	65	760	④

流量曲线/Airflow curves:

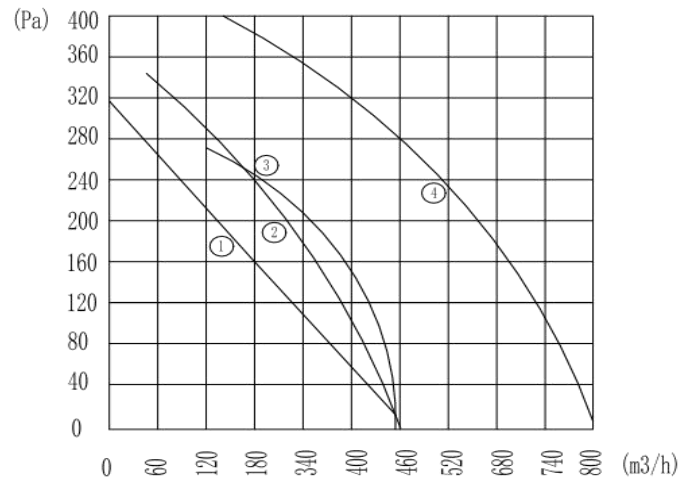

尺寸图/Dimensions:

型号	A	B	C	D	E	F	G	H	I
YWFF2E140	115	96	80	115	96	88	82	209	207
YWFF2E160	160	132	89	118	92	89	90	224	250

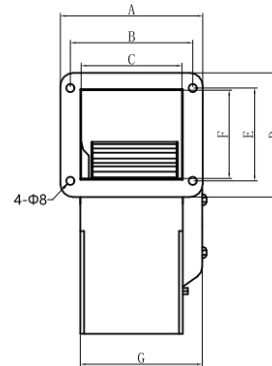




Ø 180-200MM AC Single Inlet Forward Centrifugal Fans



型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E180A	230	50	0.70	140	1330	3.5	4.8	65	850	①
YWF-F-4D180A	380	50	0.30	140	1350	/	4.8	63	880	②
YWF-F-4E200A	230	50	0.95	200	1300	3.5	5.0	66	950	③
YWF-F-4D200A	380	50	0.35	200	1300	/	5.0	67	980	④

流量曲线/Airflow curves:

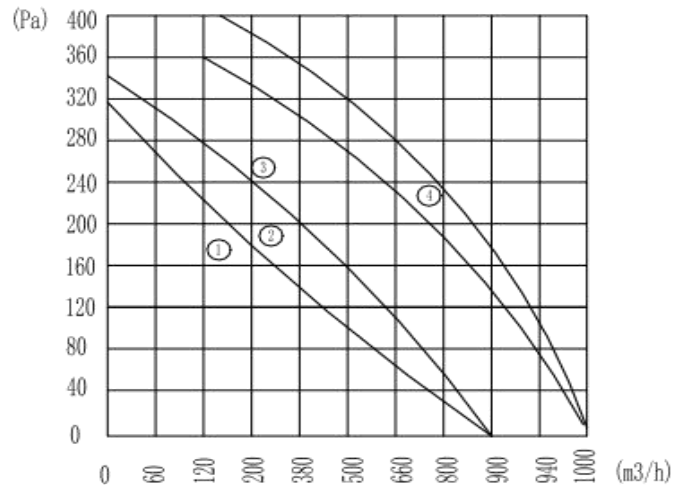

尺寸图/Dimensions:

型号	A	B	C	D	E	F	G	H	I
YWFF4E180	170	115	120	160	130	108	125	278	260
YWFF4E200	150	125	106	125	105	82	108	300	308

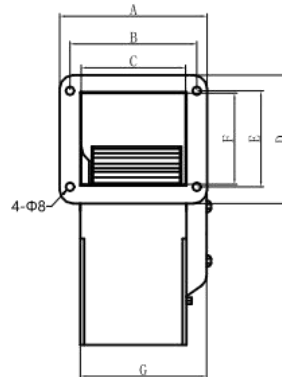




Ø 250-280MM

AC Single Inlet Forward Centrifugal Fans



型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风压 Air pressure (Pa)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E250A	230	50	3.50	790	1350	400	10	75	2360	①
YWF-F-4D250A	380	50	1.63	800	1350	400	10	75	2600	②
YWF-F-4E280A	230	50	4.85	1100	1350	520	15	78	2850	③
YWF-F-4D280A	380	50	2.20	1150	1350	520	15	78	3300	④

流量曲线/Airflow curves:

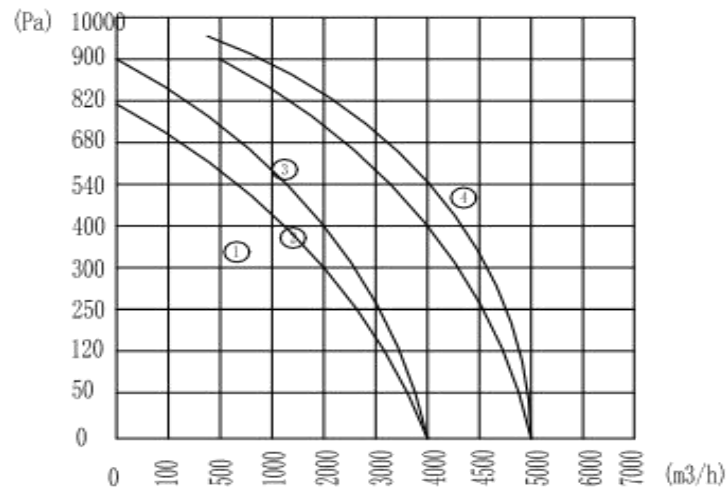

尺寸图/Dimensions:

型号	A	B	C	D	E	F	G	H	I
YWFF4E250	351	325	299	201	175	150	333	442	377
YWFF4D280	395	370	346	353	327	303	373	507	456

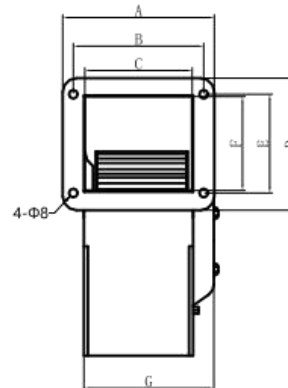




Ø 300-350MM

AC Single Inlet Forward Centrifugal Fans



型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风压 Air pressure (Pa)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-F-4E300A	230	50	13.50	2000	1350	800	18	82	4600	①
YWF-F-4D300A	380	50	4.60	2200	1350	800	18	82	4800	②
YWF-F-4D350A	380	50	9.50	4300	1350	900	20	85	7000	③
YWF-F-6D350A	380	50	4.20	4500	900	520	20	75	5000	④

流量曲线/Airflow curves:

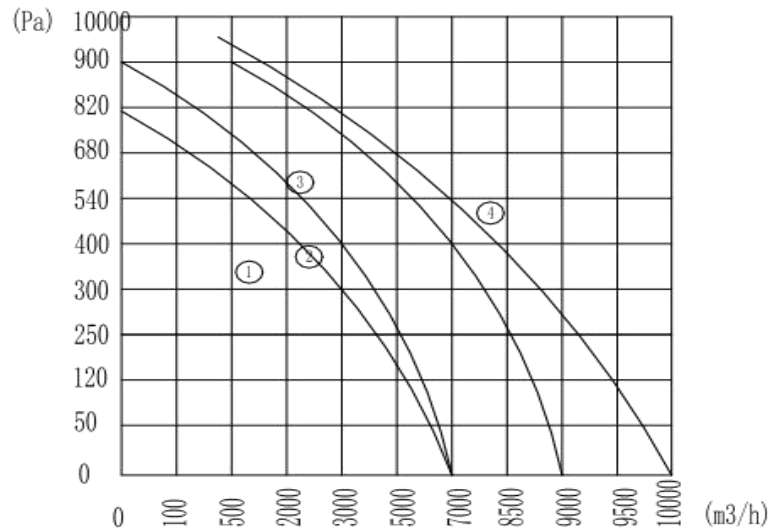

尺寸图/Dimensions:

型号	A	B	C	D	E	F	G	H	I
YWFF4E300	260	236	204	273	243	213	350	590	492
YWFF4D350	260	236	200	295	265	235	347	671	570

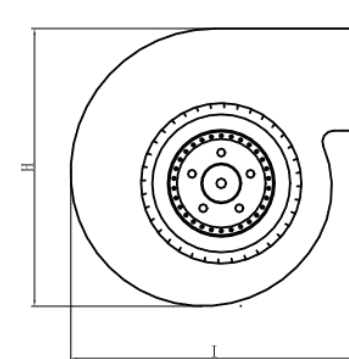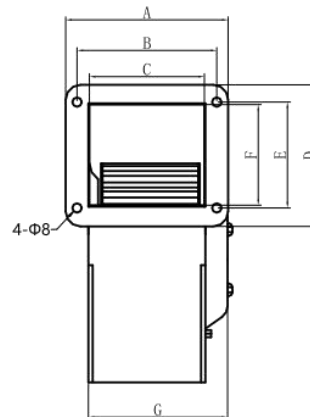




Ø 133-146MM

AC Dual Inlet Forward Centrifugal Fans



型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-D-2E133B	230	50	0.46	100	1390	5	4.5	62	540	①
YWF-D-2E133B	230	60	0.75	156	1600	5	4.5	66	640	②
YWF-D-4E146B	230	50	0.54	117	1320	5	4.9	61	870	①
YWF-D-4E146B	230	60	0.83	173	1450	5	4.9	66	930	②

流量曲线/Airflow curves:

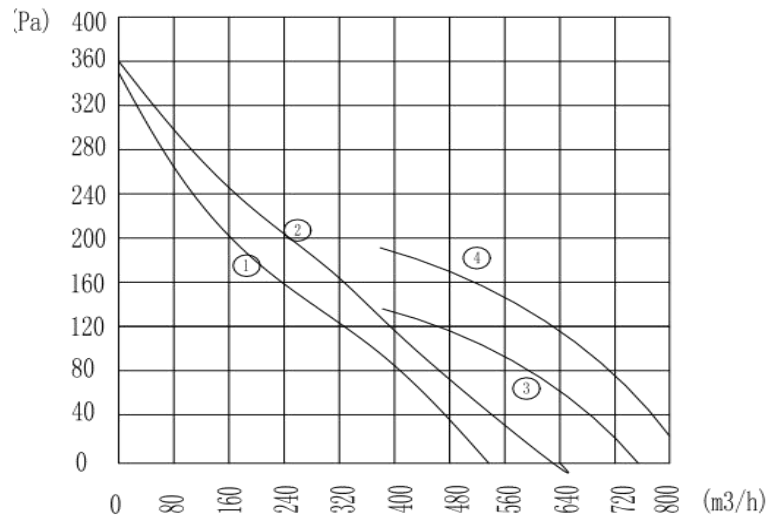

尺寸图/Dimensions:



型号	A	B	C	D	E	F	G	H	I
YWF2E133	175	165	132	80	65	48	145	168	157
YWF2E146	270	245	230	142	126	102	232	213	201

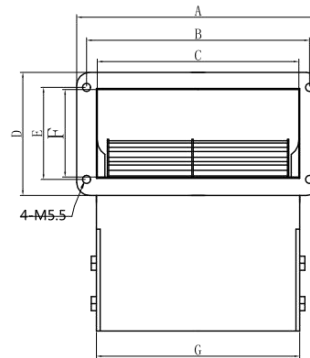



AC Dual Inlet Forward Centrifugal Fans



机号	型号 Model No.	A	A1	A2	A3	B	B1	B2	B3	E1	E2	n2-d2
2.0	11-45	90	238	367	287	78	126	155	175	260	283	4-Ø9
2.25	10-63	100	275	305	325	83	137	166	188	302	325	4-Ø9
2.5	8-34	109	290	320	340	130	230	260	280	317	338	4-Ø9
2.5	12-45	113	305	335	355	90	153	181	202	330	252	4-Ø9
2.5	12-58	115	323	353	373	130	233	262	282	350	370	4-Ø9
2.8	10-60/9-67	129	350	380	400	110	300	330	350	380	410	4-Ø9
3.0	9-56/9-57	122	333	362	382	127	225	255	275	360	392	4-Ø9
3.5	10-48/11-48	103	312	347	272	120	359	390	419	354	392	4-Ø13.5
4.0	12-45	133	400	430	460	133	400	432	460	430	460	4-Ø13.5
4.5	15-42	145	435	469	495	120	360	392	420	480	520	4-Ø13.5
4.5	11-68	205	615	645	675	120	360	392	420	660	695	4-Ø13.5





AC Dual Inlet Forward Centrifugal Fans

机号	型号 Model No.	a	b	c	d	e	f	G1	G2	H1	H2	H3	n1-d1
2.0	11-45	14	10	100	100	200	240	320	350	183	167	148	10-Ø7
2.25	10-63	/	/	100	100	200	240	350	390	203	183	163	10-Ø7
2.5	8-34	15	7	115	115	230	270	370	430	232	190	180	10-Ø7
2.5	12-45	15	13	115	115	230	270	390	429	228	204	179	10-Ø7
2.5	12-58	15	7	115	115	230	270	374	430	232	190	180	10-Ø7
2.8	10-60/9-67	/	5	150	150	300	360	462	505	267	/	207	12-Ø7
3.0	9-56/9-57	25	17	150	150	300	360	513	560	301	266	233	8-Ø7
3.0	16-47	25	17	150	150	300	360	513	560	301	266	233	8-Ø7
3.5	10-48/11-48	33	34	230	230	460	520	606	727	419	339	273	12-Ø9
4.0	12-45	80	/	/	/	400	600	725	775	/	375	320	12-Ø9
4.5	13-42/15-42	150	/	/	/	400	660	730	840	/	405	330	12-Ø9
4.5	11-68	150	/	/	/	400	660	730	840	/	405	330	12-Ø9





AC Dual Inlet Forward Centrifugal Fans

机号	型号 Model No.	配用电机 (KW-P)	流量 (m³/h)	全压 (Pa)	噪声 (DB<A>)
2.0	11-45	0.25-4	900-1500	315-295	≤64
2.25	10-63	0.45-4	2300-2900	325-300	≤66
2.5	8-34	0.75-4	1800-2600	500-450	≤64
2.5	12-45	0.75-4	2100-3000	515-475	≤64
2.5	12-58	0.85-4	2500-4000	400-270	≤67
2.8	9-67	0.55-6	2100-3600	270-190	≤64
2.8	10-60	1.00-4	2600-4600	490-420	≤69
3.0	9-56	1.80-4	3800-5500	620-600	≤72
3.0	9-57	2.20-4	4300-6500	720-700	≤72
3.0	16-47	1.10-6	3100-5100	425-405	≤67
3.5	10-48	1.50-6	3100-6100	355-330	≤68
3.5	11-48	3.00-4	5300-7500	425-405	≤75
4.0	12-45	3.00-6	5100-9100	610-590	≤72
4.5	13-42	4.00-6	5600-11000	800-750	≤75
4.5	15-42	5.50-6	7500-13000	850-800	≤77
4.5	11-68	7.50-6	13000-19000	750-700	≤78




Ø 100 - 315MM

AC external rotor duct fan

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	净重 N.W. (KG)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)
YWF-G-2E100	120	60	0.64	72	2700	5/250V	3.0	58	290
	220	50	0.29	61	2480	2/450V	3.0	56	282
YWF-G-2E125	120	60	0.67	77	2630	5/250V	3.0	59	305
	220	50	0.34	71	2480	2/450V	3.0	56	293
YWF-G-2E150	120	60	0.95	127	2520	8/250V	5.4	63	600
	220	50	0.48	105	2480	3/450V	5.4	59	550
YWF-G-2E160	120	60	0.97	120	2560	8/250V	5.4	66	620
	220	50	0.50	111	2530	4/450V	5.4	65	600
YWF-G-2E200	120	60	1.20	187	2560	10/250V	5.7	67	920
	220	50	0.70	150	2510	5/450V	5.7	64	900
YWF-G-2E250	120	60	1.30	190	2510	12/250V	5.7	68	1000
	220	50	0.75	159	2490	5/450V	5.7	66	950
YWF-G-2E315	120	60	1.72	212	2500	12/250V	7.0	70	1650
	220	50	0.79	168	2450	5/450V	7.0	68	1600

尺寸图/Dimensions:

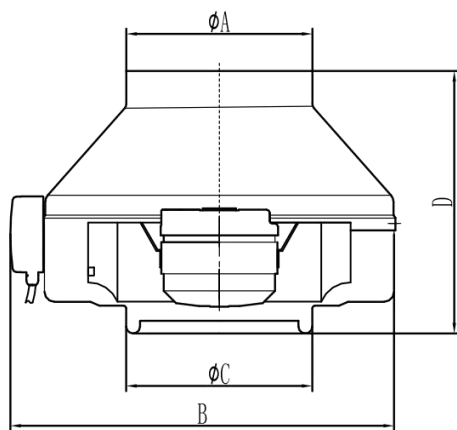

型号	A	B	C	D
GTB100	100	267	100	200
GTB125	125	267	100	208
GTB150	150	317	150	207
GTB160	160	317	160	216
GTB200	200	374	200	250
GTB250	250	374	250	220
GTB315	315	440	315	255



HF 100



HF 125



HF 150





HF 200



Ø 100 - 315MM

AC external rotor duct fan

型号 Model No.	电压 Voltage (V)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)
YWF-HF-100	220	35	2500	31	220
YWF-HF-125	220	45	2500	34	310
YWF-HF-150	220	75	2500	38	540
YWF-HF-200	220	130	2500	43	900
YWF-HF-250	220	200	2500	58	1300
YWF-HF-315	220	320	2500	65	2900

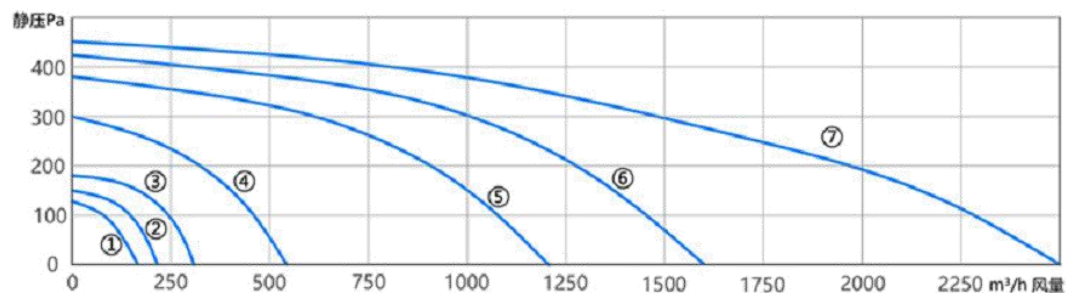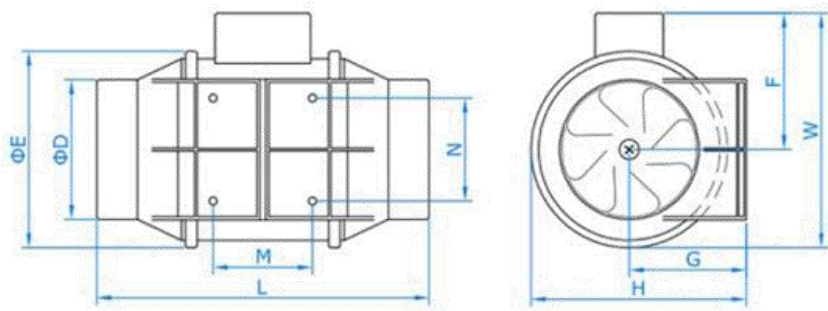



ΦD	ΦE	F	G	H	L	M	N	W
72	140	100	85	155	240	45	78	170
95	140	100	85	155	240	45	78	170
95	163	112	100	178	295	80	60	200
123	163	112	100	178	295	80	60	200
147	187	140	120	220	320	105	77	229
157	187	140	120	220	320	105	77	229
197	206	146	147	250	305	100	94	249
245	260	169	145	275	385	133	100	300
310	330	200	175	340	445	185	112	360



Ø 250MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4E-250	230	50	0.44	45	1400	2	55	830	①
YWF-N-4D-250	380	50	0.17	45	1400	/	55	830	②

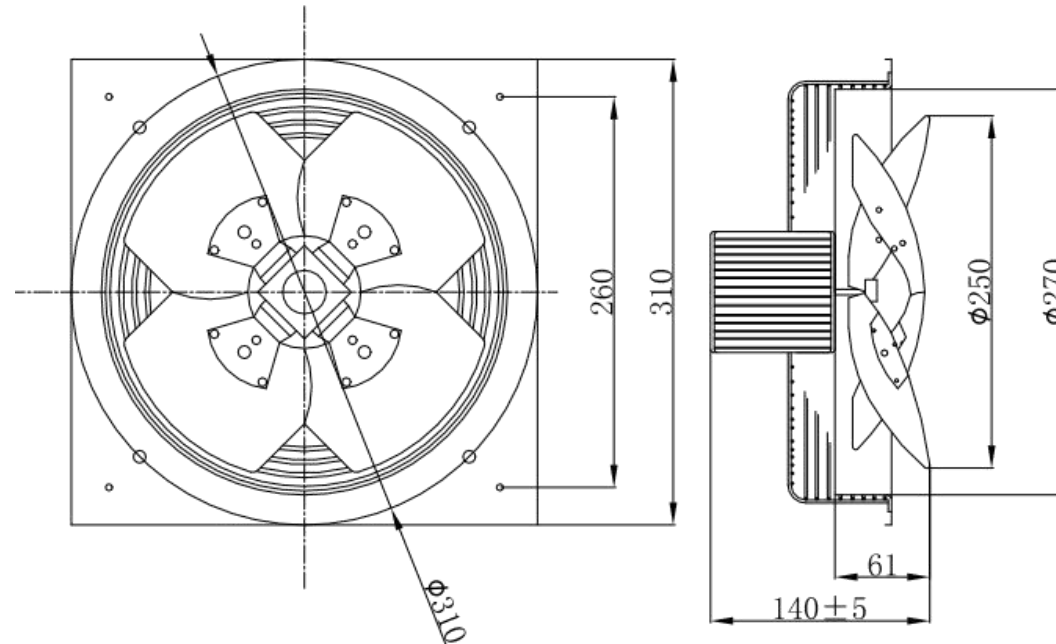
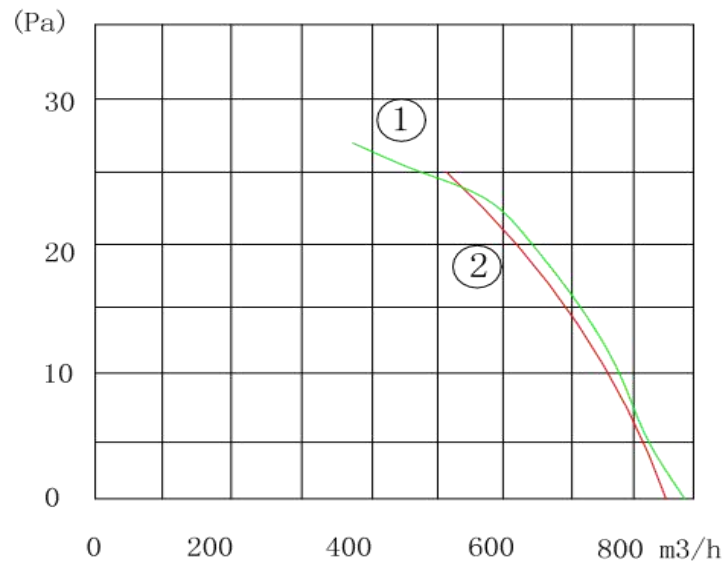




Ø 300MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4E-300	230	50	0.44	45	1400	2	55	1250	①
YWF-N-4D-300	380	50	0.17	45	1400	/	55	1250	②

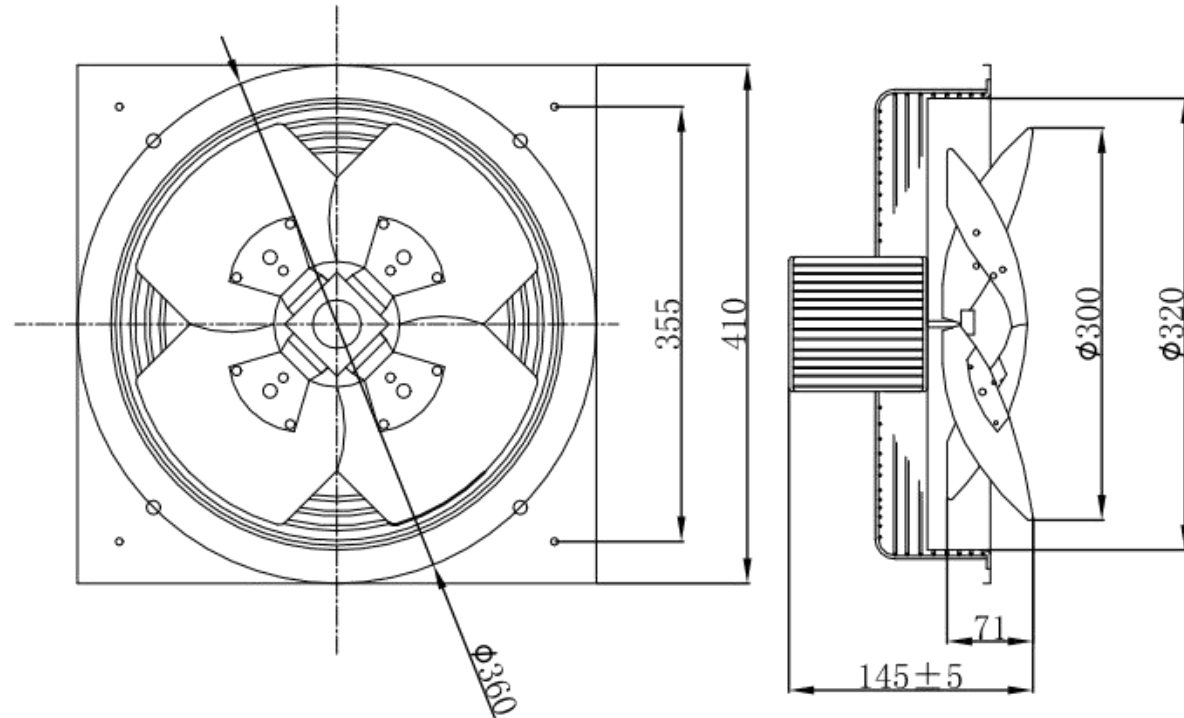
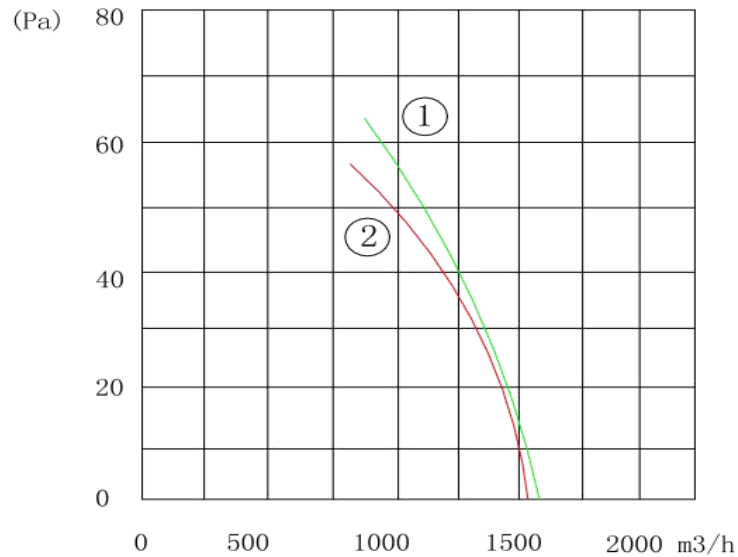




Ø 350MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-350	230/380	50/60	0.88/0.34	120	1400	5	64	2500	①/③
YWF-N-6-350	230/380	50/60	0.72/0.28	90	920	3	55	1500	②/④

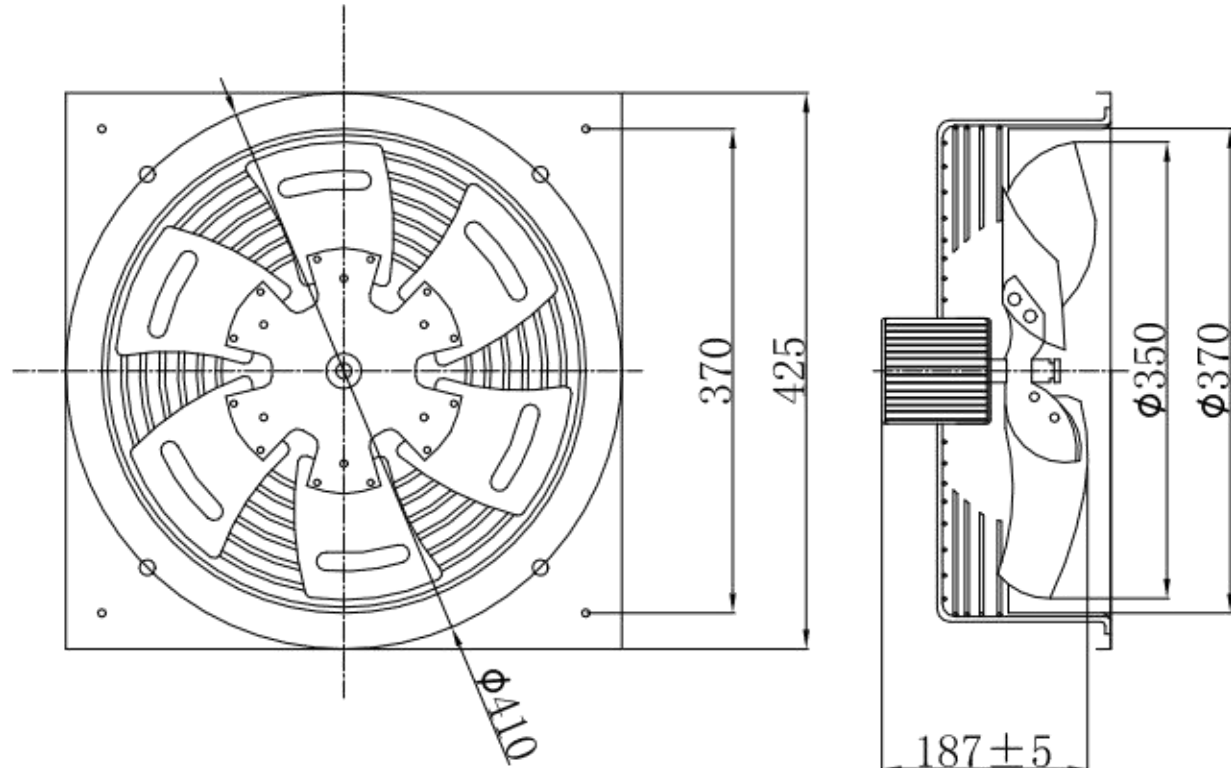
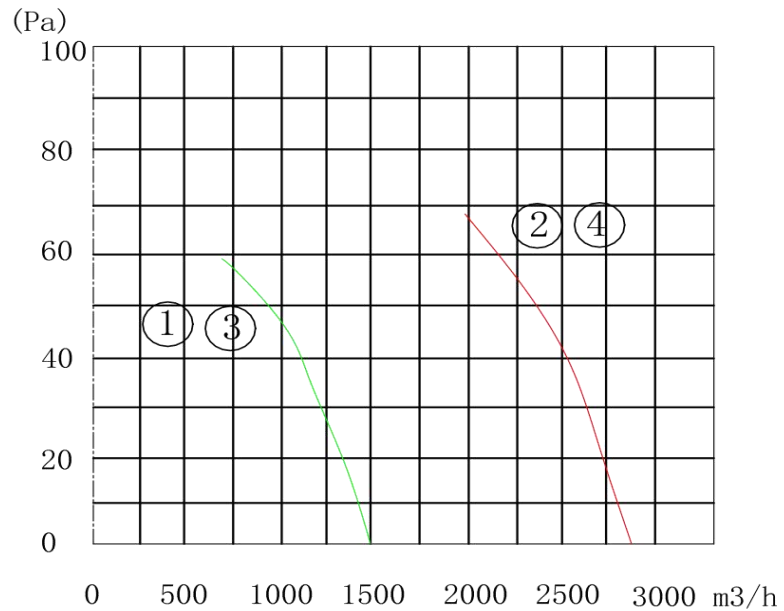




Ø 400MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-400	230/380	50/60	0.49/0.45	180	1400	5	64	3450/3600	③/④
YWF-N-6-400	230/380	50/60	0.72/0.28	90	920	3	56	2500/2600	①/②

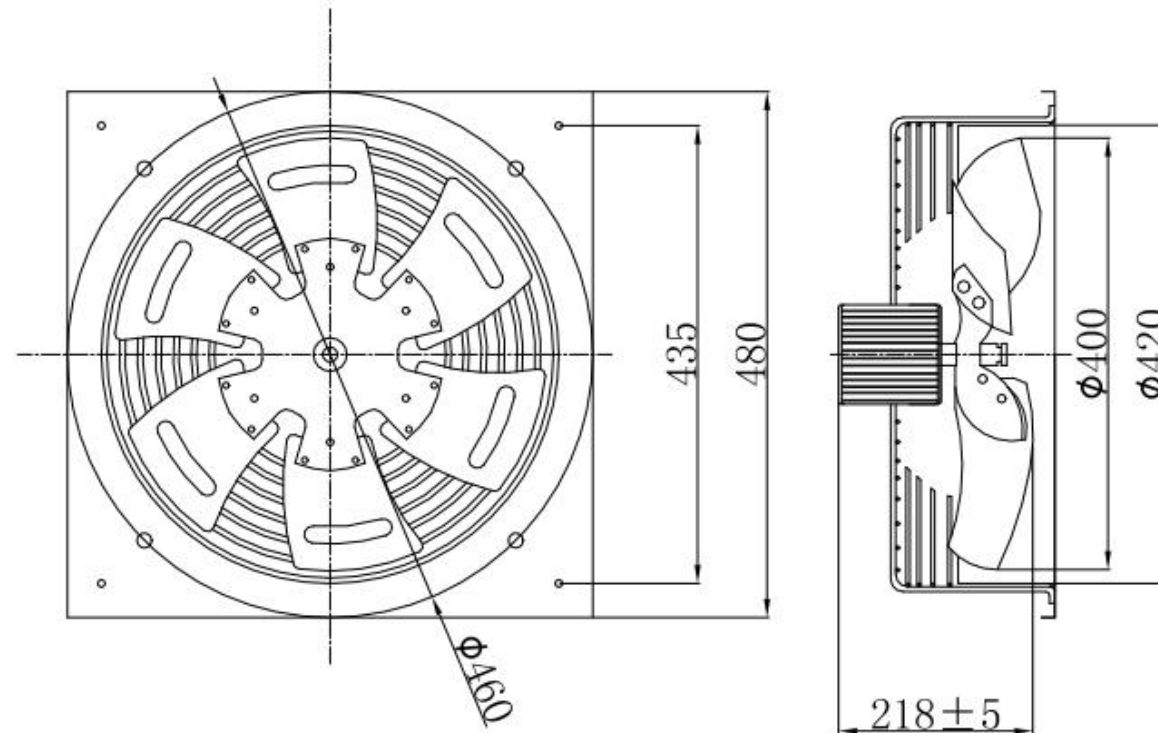
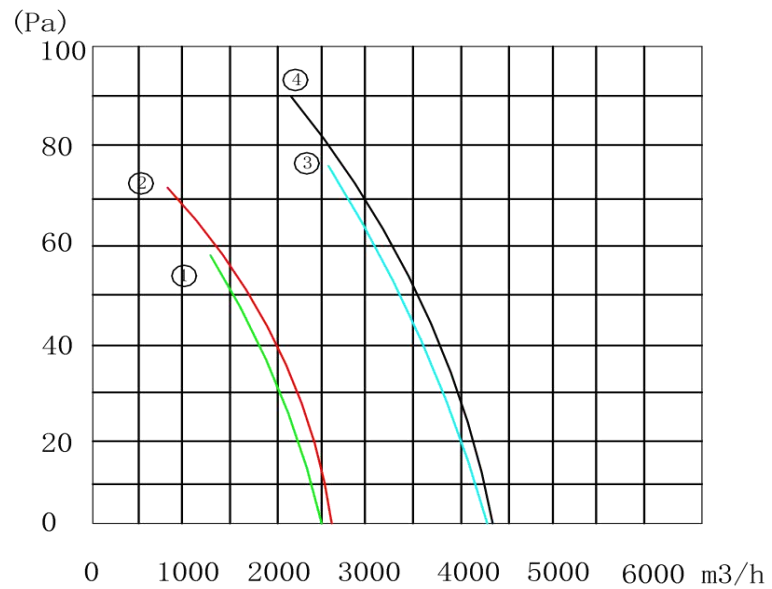




Ø 450MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-450	230/380	50/60	1.50/1.10	250	1400	5	73	5000	①/②
YWF-N-6-450	230/380	50/60	0.72/0.28	90	920	3	58	2800	③/④

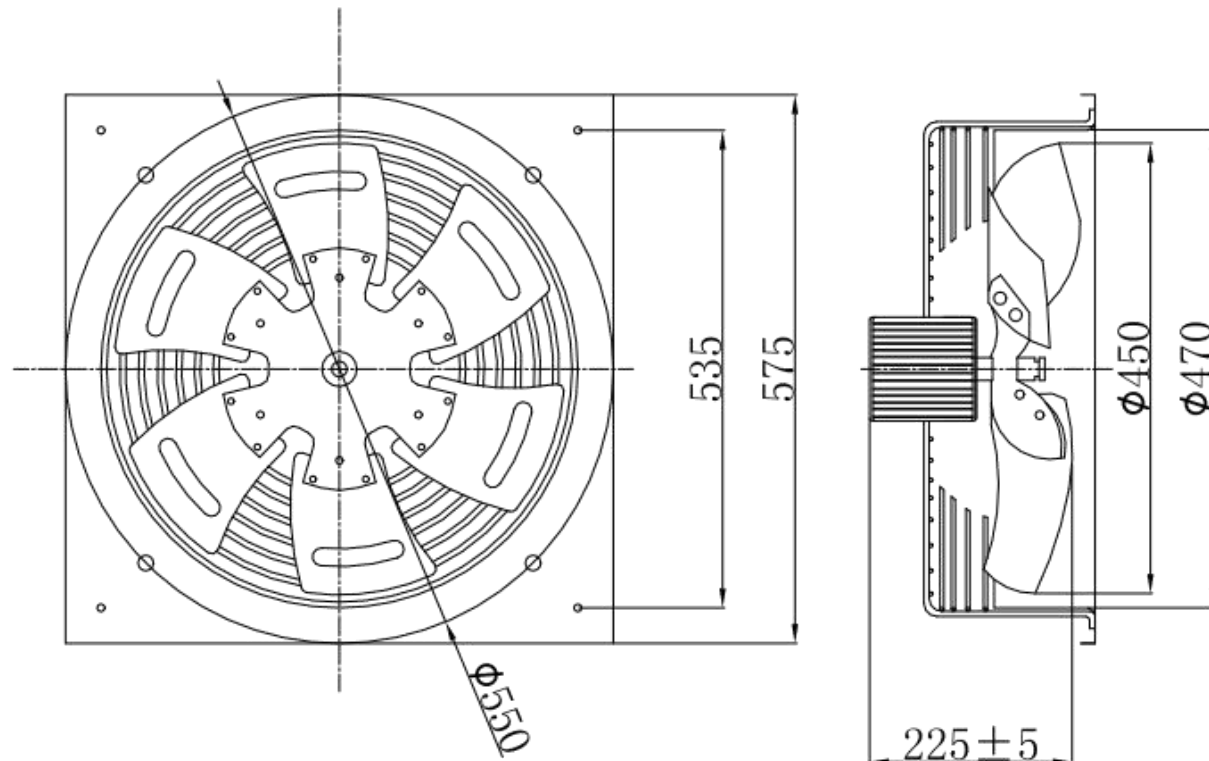
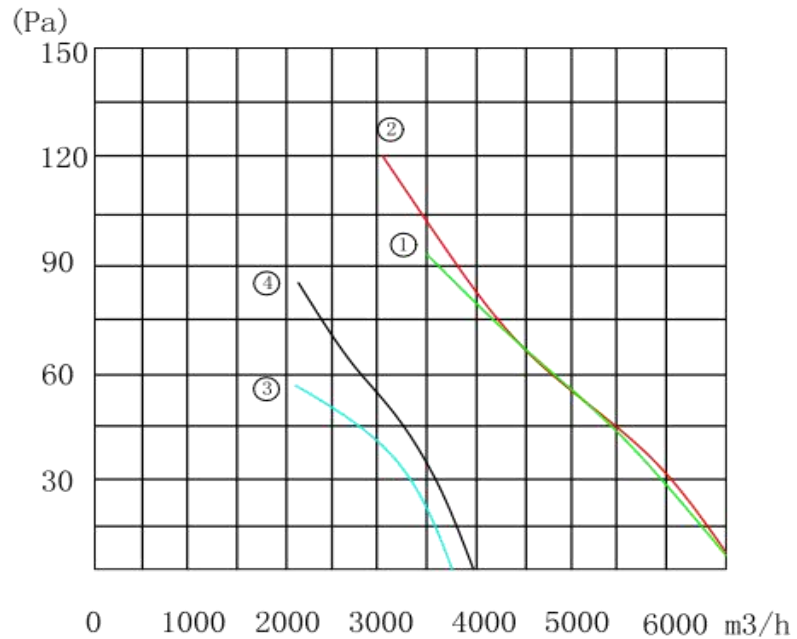




Ø 500MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-500	380	50	1.63	550	1400	/	78	7450	①
YWF-N-6-500	380	50	1.25	370	930	/	78	4450	②

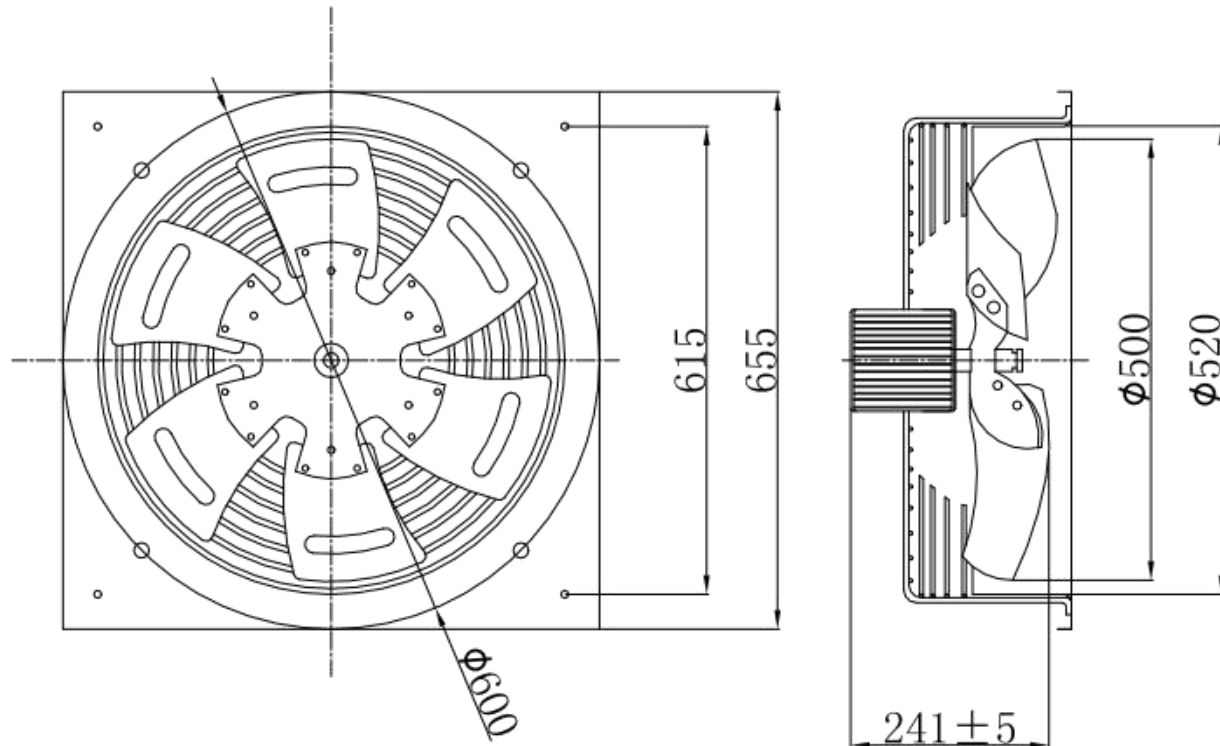
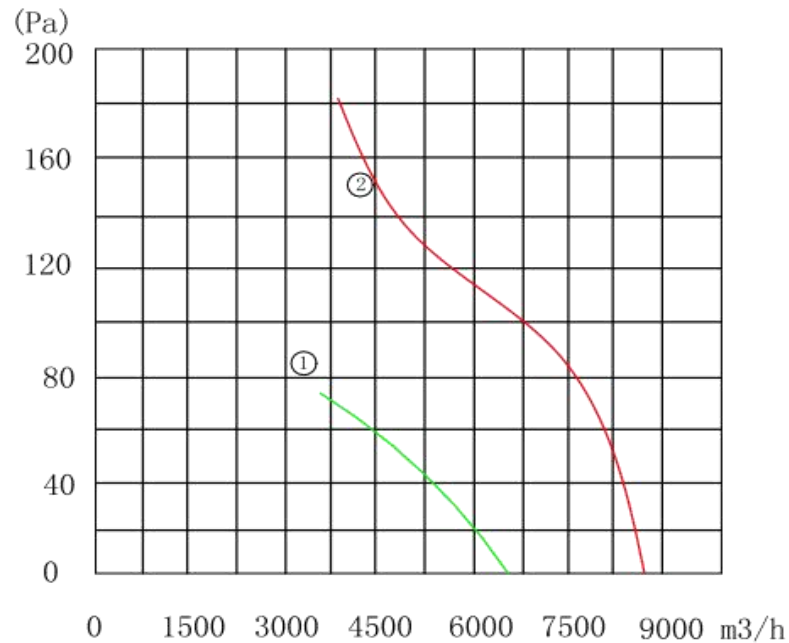




Ø 550MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-550	380	50	1.94	750	1400	/	82	11000	①
YWF-N-6-550	380	50	1.20	370	930	/	65	6000	②
YWF-N-8-550	380	50	0.90	250	700	/	56	4500	③

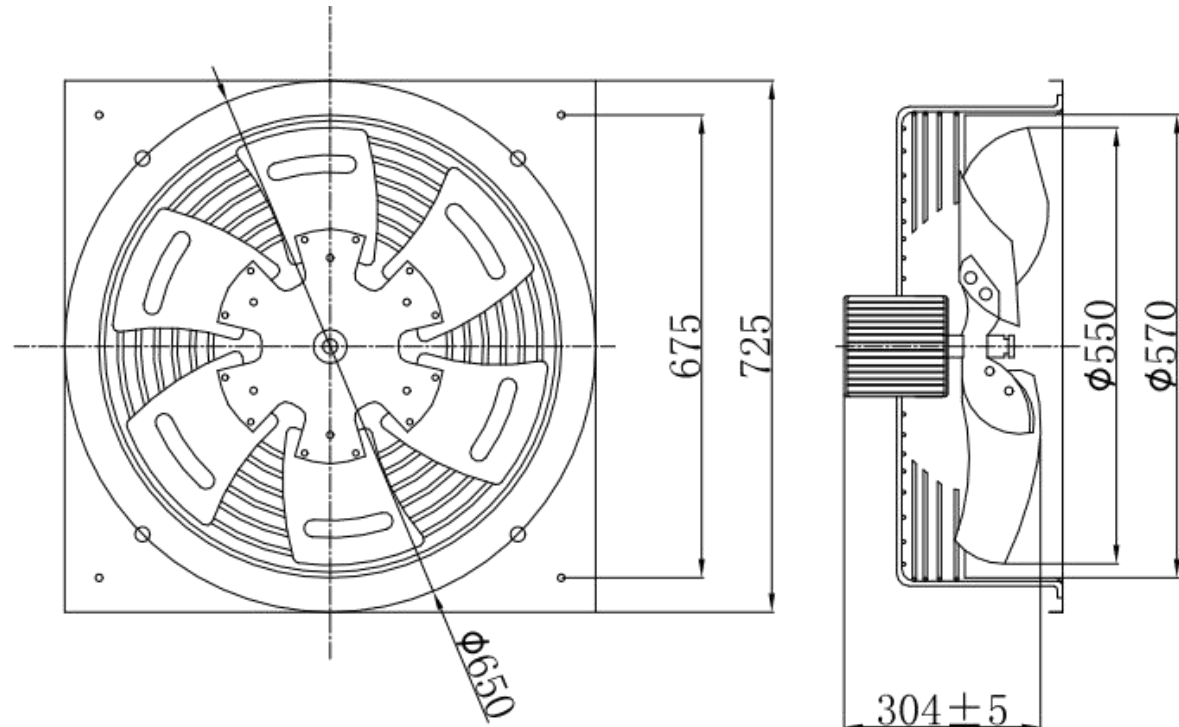
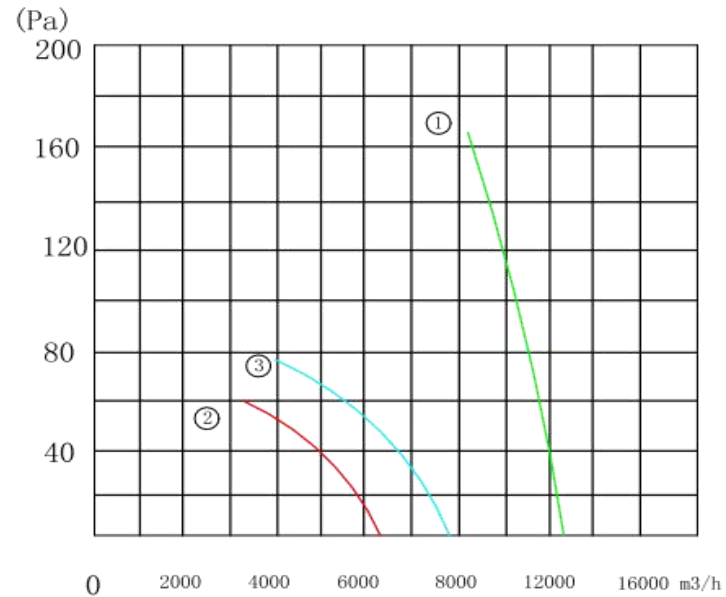




Ø 600MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-600	380	50	2.80	1100	1400	/	83	11000	①
YWF-N-6-600	380	50	1.75	550	930	/	69	6700	②
YWF-N-8-600	380	50	0.90	370	700	/	60	5500	③

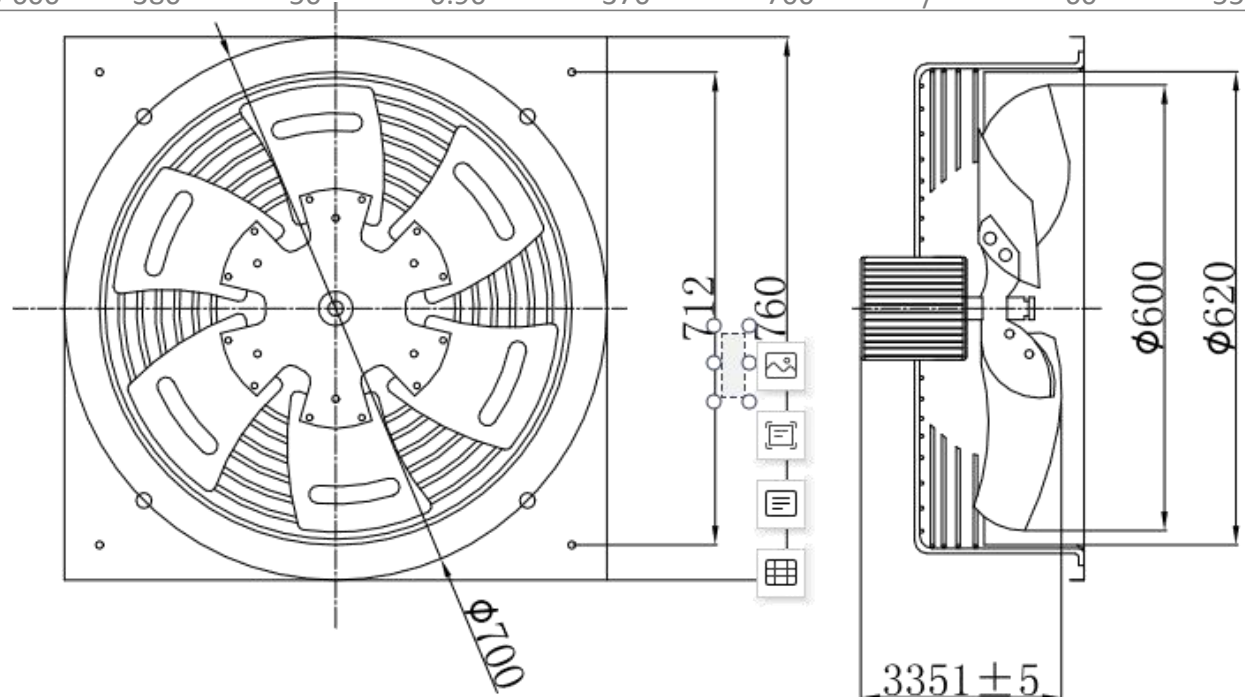
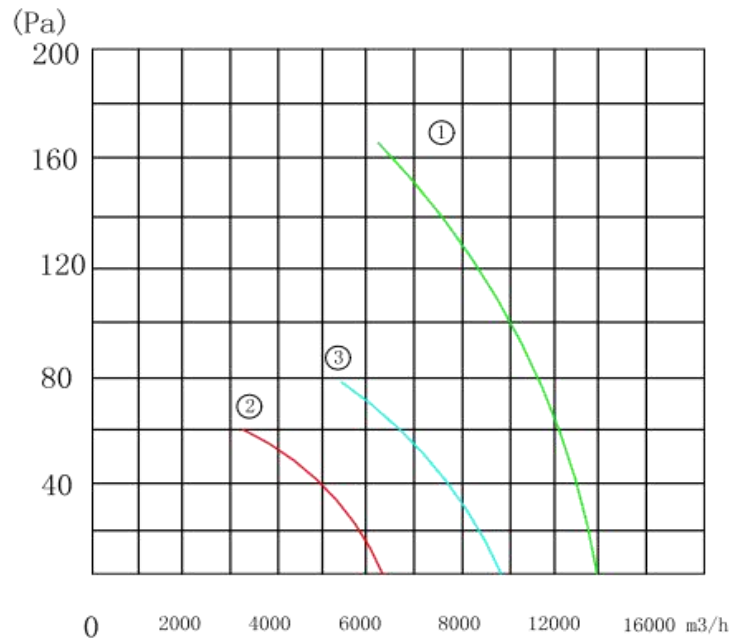




Ø 650MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-650	380	50	3.50	1300	1400	/	86	15100	①
YWF-N-6-650	380	50	1.75	550	940	/	73	10000	②
YWF-N-8-650	380	50	0.90	370	700	/	69	7850	③

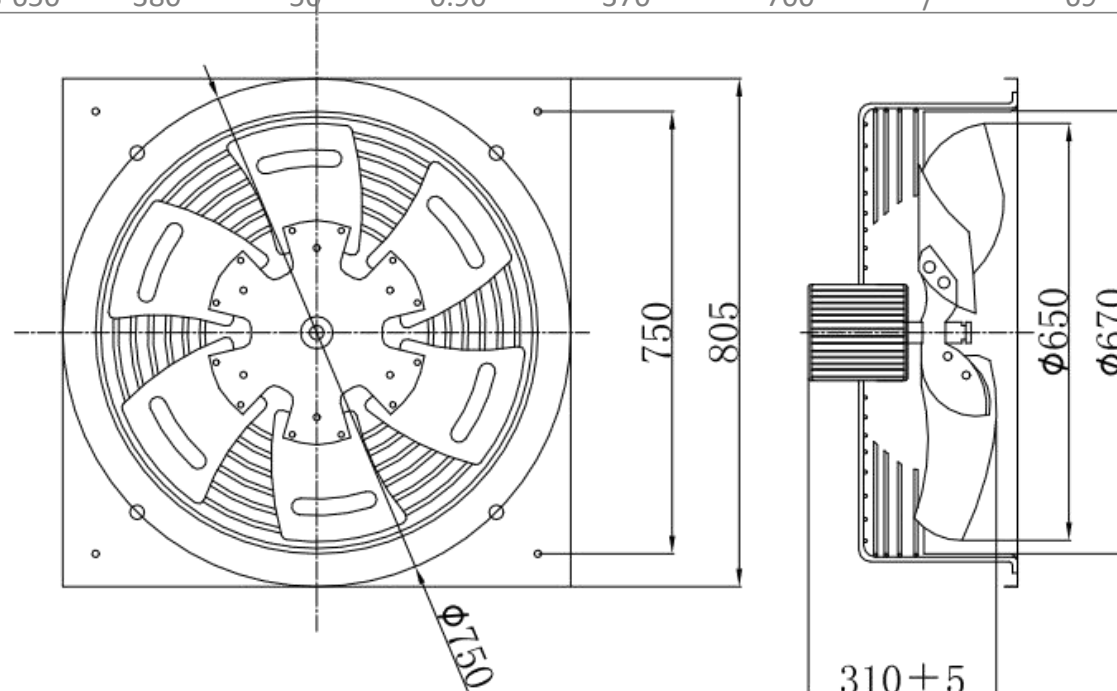
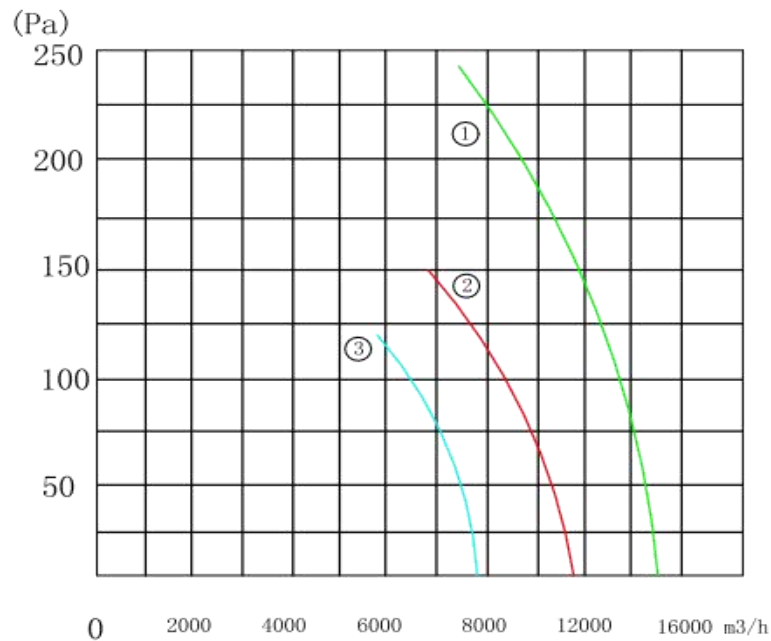




Ø 700MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-700	380	50	5.00	2200	1440	/	88	17200	①
YWF-N-6-700	380	50	2.40	750	940	/	73	11750	②
YWF-N-8-700	380	50	2.20	700	700	/	69	12100	③

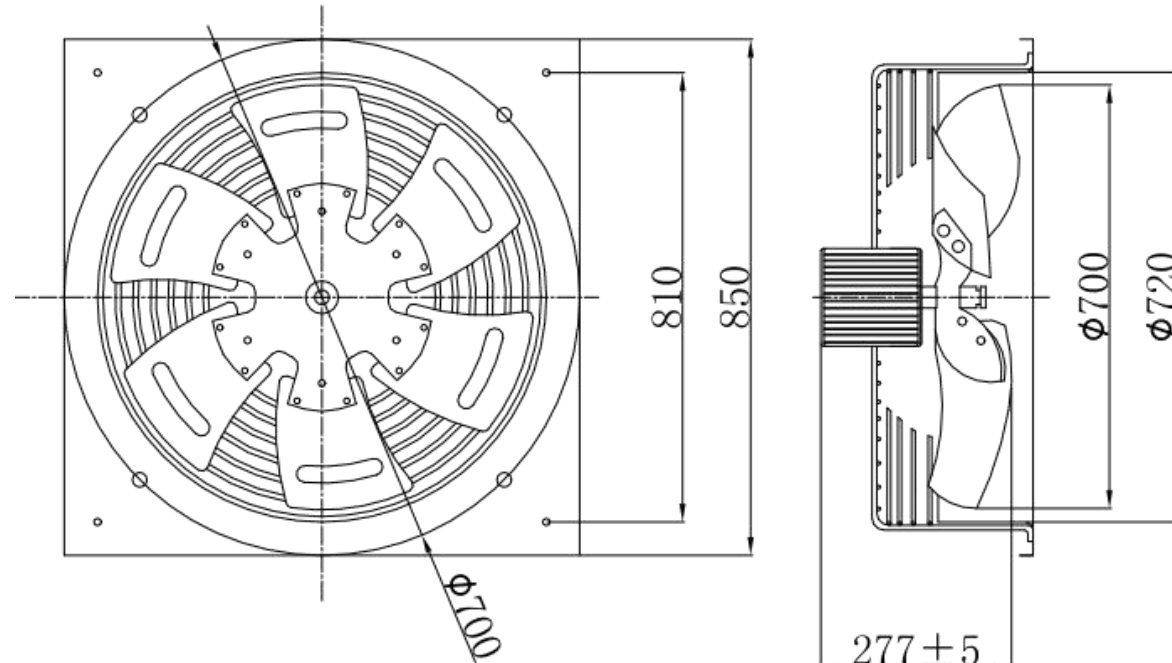
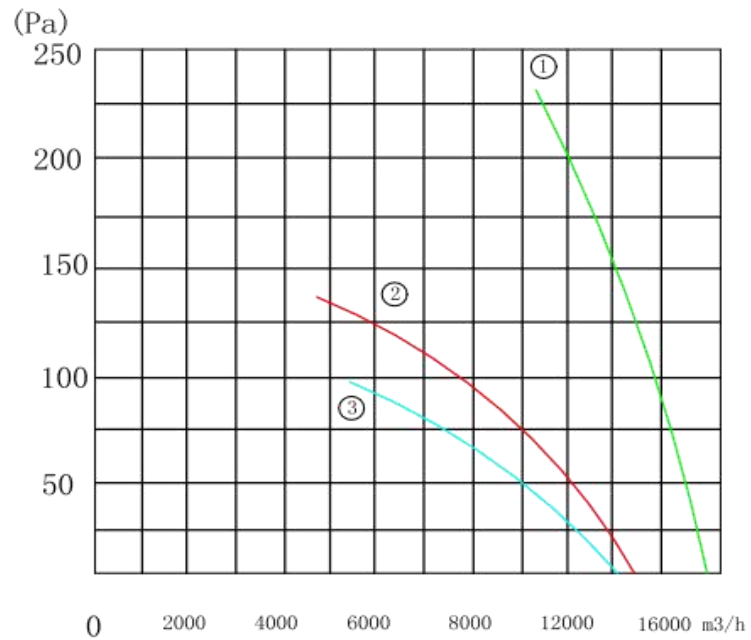




Ø 750MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-750	380	50	7.00	3000	1440	/	89	21900	①
YWF-N-6-750	380	50	3.00	1100	940	/	74	14600	②
YWF-N-8-750	380	50	2.80	750	715	/	69	11000	③

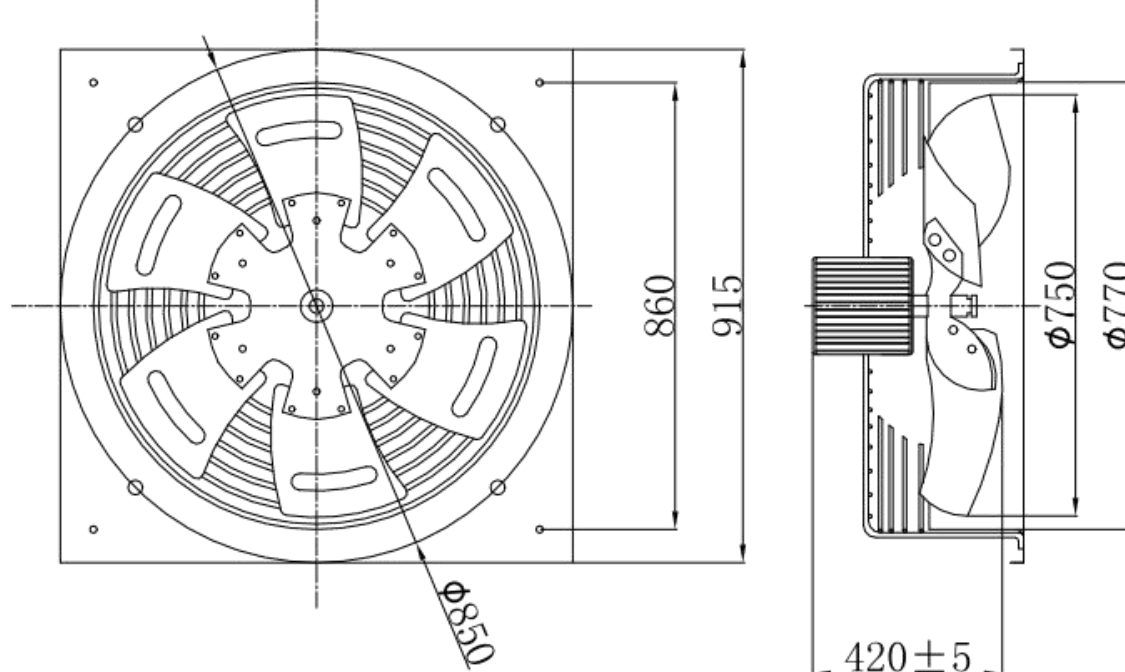
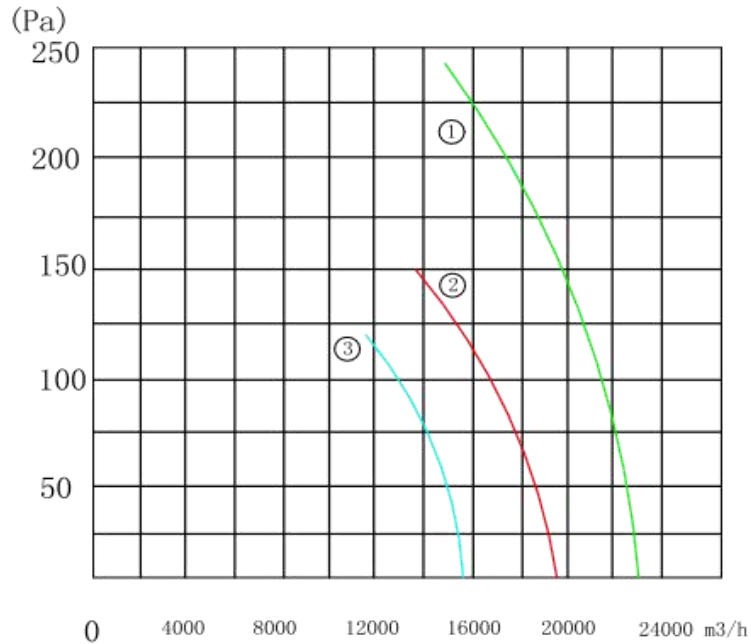




Ø 800MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N-4-800	380	50	7.00	3000	1440	/	93	25500	①
YWF-N-6-800	380	50	4.50	1500	945	/	80	20000	②
YWF-N-8-800	380	50	2.20	750	700	/	72	13000	③

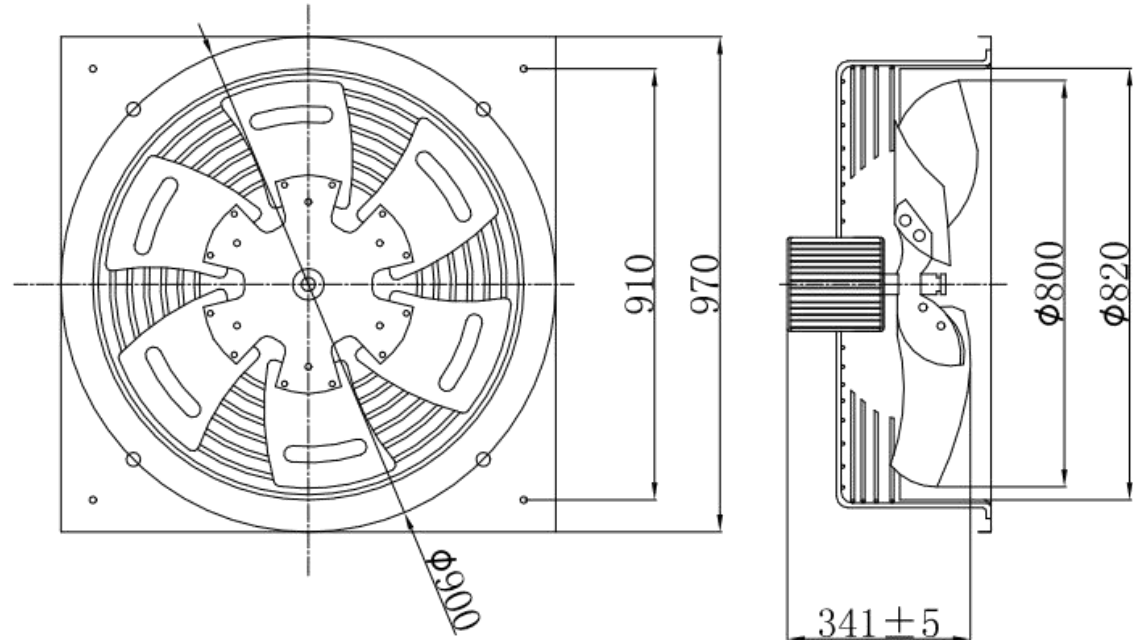
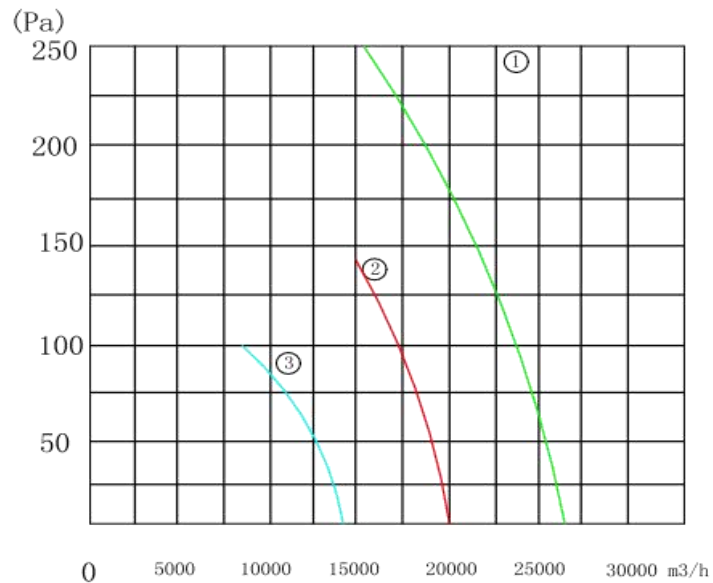




Ø 900MM

AC axial Fans with internal rotor motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N- 4-900	380	50	9.50	4000	1450	/	95	29000	①
YWF-N- 6-900	380	50	5.60	2200	940	/	86	27500	②
YWF-N- 8-900	380	50	2.80	1100	715	/	74	22500	③
YWF-N-10-900	380	50	2.10	550	535	/	65	14500	④

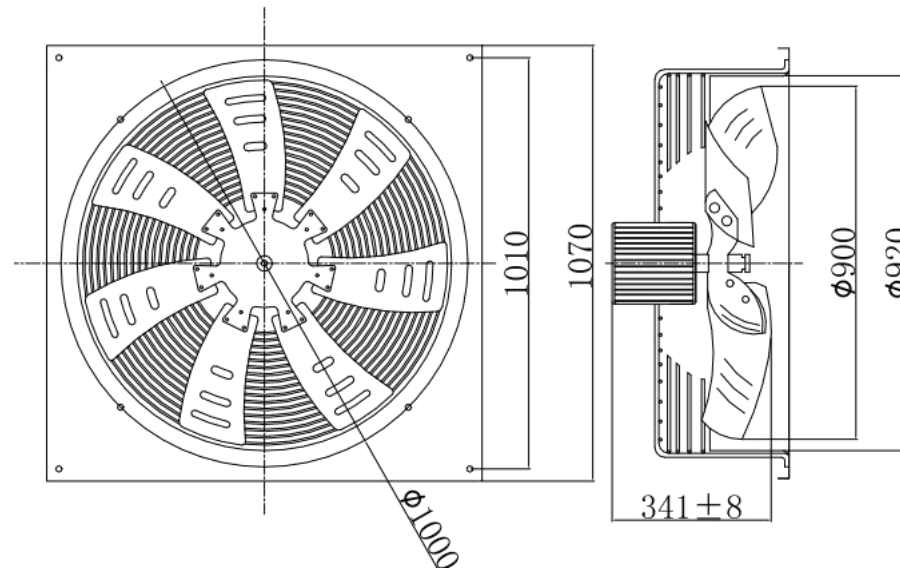
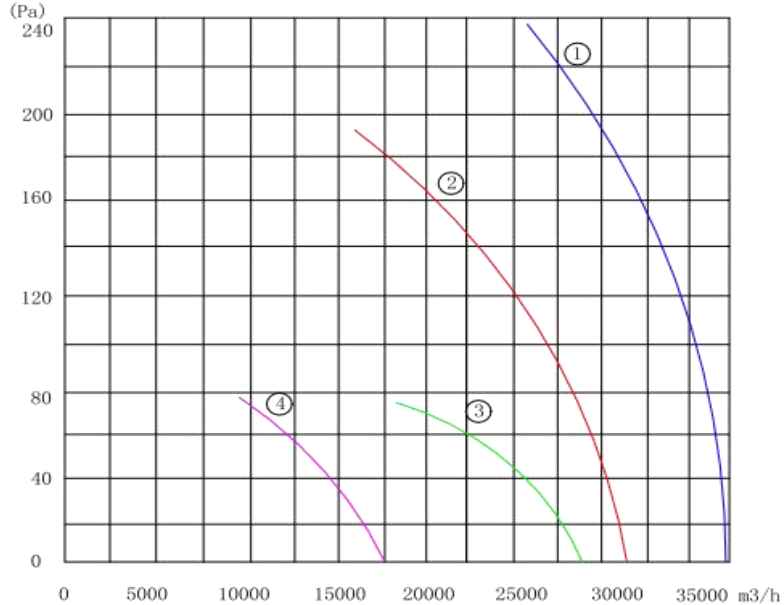




Ø 1000MM

AC axial Fans with internal rotor motor


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	电容 Capacitor (UF)	噪音 Noise (dBA)	最大风量 Max Airflow (m³/h)	曲线 Curve
YWF-N- 4-1000	380	50	15.30	7500	1450	/	96	43000	①
YWF-N- 6-1000	380	50	5.60	2200	940	/	86	35000	②
YWF-N- 8-1000	380	50	2.80	1100	715	/	74	30000	③
YWF-N-10-1000	380	50	2.10	550	535	/	65	25500	④

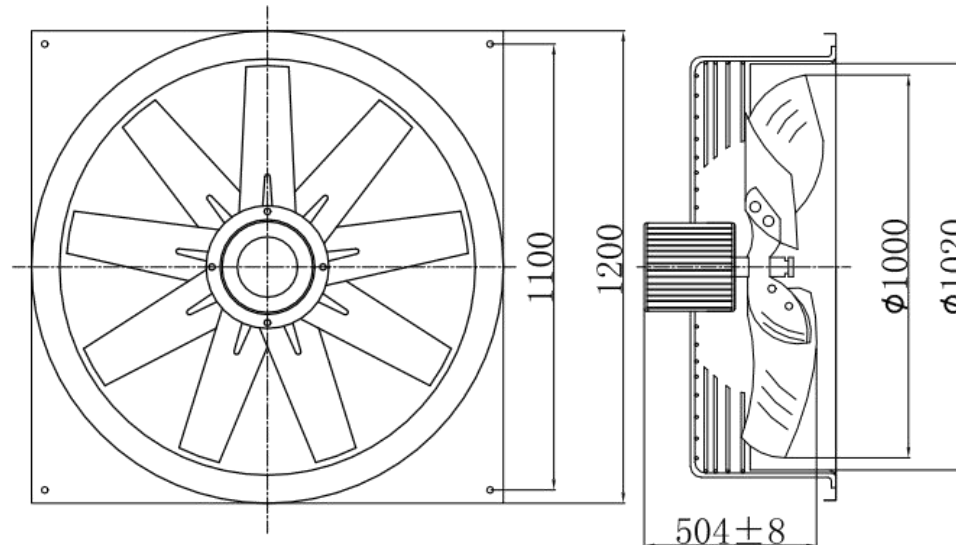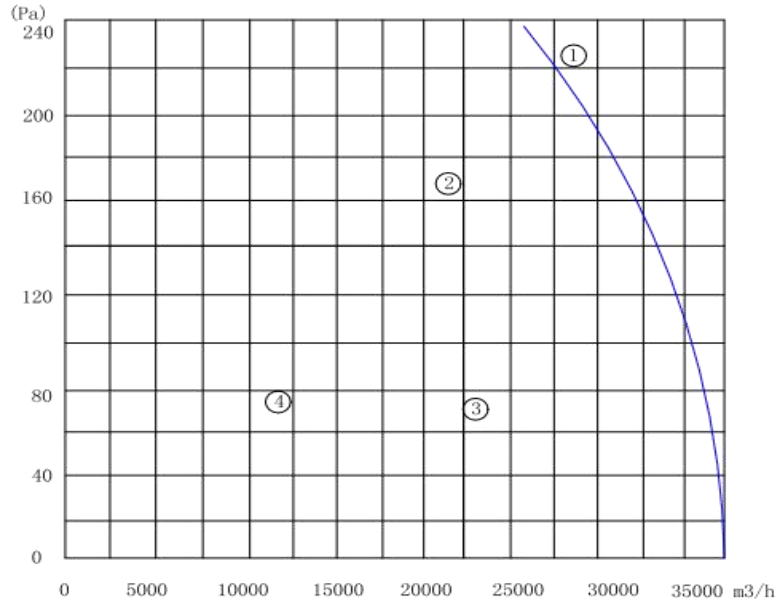

AC series Cooling Fan





型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-8025HS1	110	0.14/0.12	15.4/13.2	2300/2700	29/33	17/21	3.0/4.3	Sleeve
YWF-8025HS2	220	0.08/0.07	17.6/15.4	2300/2700	29/33	17/21	3.0/4.3	Sleeve
YWF-8025HS3	380	0.05/0.04	19.0/15.2	2300/2700	29/33	17/21	3.0/4.3	Sleeve
YWF-8025HB1	110	0.14/0.12	15.4/13.2	2400/2700	30/34	18/22	3.2/4.5	Ball
YWF-8025HB2	220	0.08/0.07	17.6/15.4	2400/2700	30/34	18/22	3.2/4.5	Ball
YWF-8025HB3	380	0.05/0.04	19.0/15.2	2400/2700	30/34	18/22	3.2/4.5	Ball

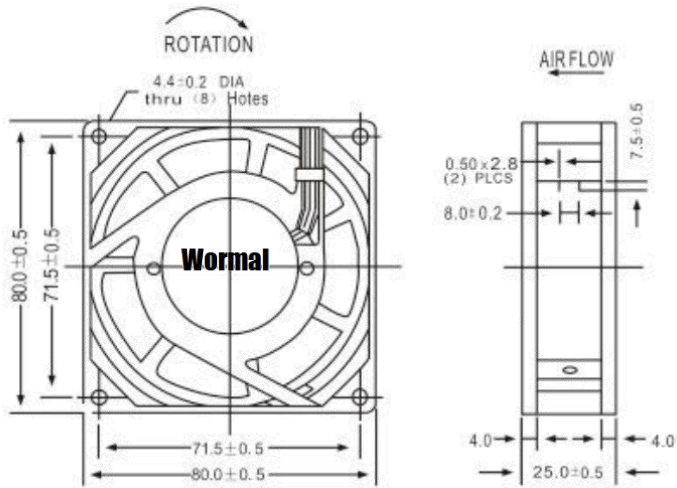

AC series Cooling Fan




型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-8038HS1	110	0.14/0.12	15.4/13.2	2400/2950	22/27	44/53	3.0/4.6	Sleeve
YWF-8038HS2	220	0.06/0.07	13.2/15.4	2650/3250	25/29	44/53	3.7/5.5	Sleeve
YWF-8038HB1	110	0.14/0.12	15.4/13.2	2850/3450	26/32	46/56	4.1/6.0	Ball
YWF-8038HB2	220	0.06/0.07	13.2/15.4	2850/3450	26/32	46/56	4.1/6.0	Ball

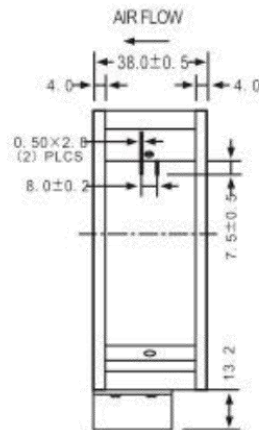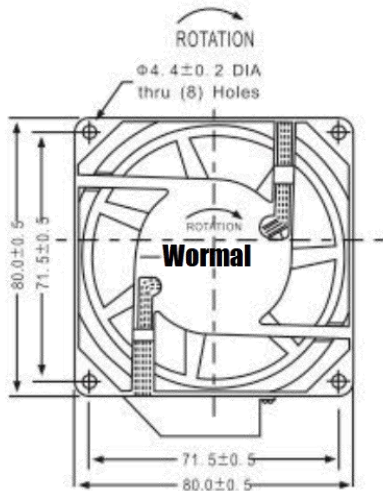



AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-9225HS1	110	0.14/0.12	15.4/13.2	2200/2600	36/40	25/31	2.3/3.3	Sleeve
YWF-9225HS2	220	0.08/0.07	17.6/15.4	2300/2700	36/40	25/31	2.3/3.3	Sleeve
YWF-9225HS3	380	0.05/0.04	19.0/15.2	2300/2700	36/40	25/31	2.3/3.3	Sleeve
YWF-9225HB1	110	0.14/0.12	15.4/13.2	2250/2650	37/41	27/32	2.4/3.4	Ball
YWF-9225HB2	220	0.08/0.07	17.6/15.4	2250/2650	37/41	27/32	2.4/3.4	Ball
YWF-9225HB3	380	0.05/0.04	19.0/15.2	2250/2650	37/41	27/32	2.4/3.4	Ball

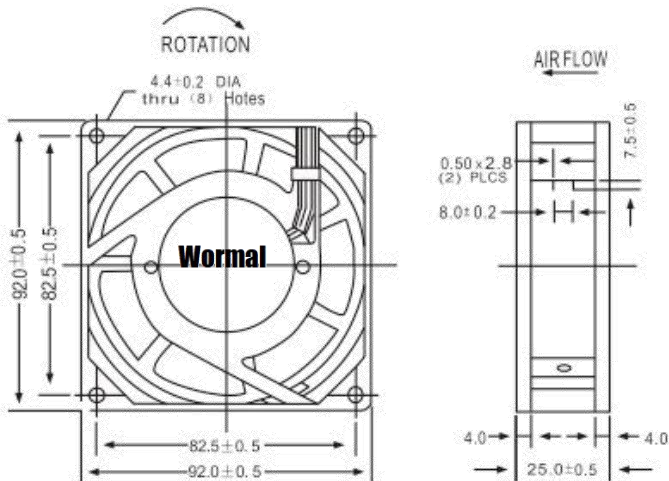

AC series Cooling Fan




型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-9238HS1	110	0.13/0.14	16/17	2650/3200	29/35	44/53	4.6/6.9	Sleeve
YWF-9238HS2	220	0.07/0.08	16/17	2650/3200	29/35	44/53	4.6/6.9	Sleeve
YWF-9238HB1	110	0.14/0.12	16/17	2800/3350	30/36	46/56	5.3/7.7	Ball
YWF-9238HB2	220	0.06/0.07	16/17	2800/3350	30/36	46/56	5.3/7.7	Ball

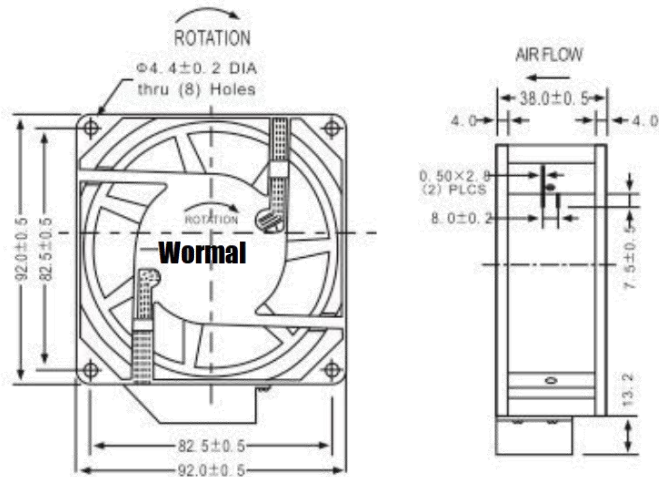

AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-11025HS1	110	0.14/0.12	15.4/13.2	2150/2550	32/36	47/57	2.6/3.9	Sleeve
YWF-11025HS2	220	0.10/0.09	17.6/15.4	2150/2550	32/36	47/57	2.6/3.9	Sleeve
YWF-11025HS3	380	0.05/0.04	19.0/15.2	2150/2550	32/36	47/57	2.6/3.9	Sleeve
YWF-11025HB1	110	0.14/0.12	15.4/13.2	2100/2600	34/38	48/58	2.7/3.0	Ball
YWF-11025HB2	220	0.10/0.09	17.6/15.4	2100/2600	34/38	48/58	2.7/3.0	Ball
YWF-11025HB3	380	0.05/0.04	19.0/15.2	2100/2600	34/38	48/58	2.7/3.3	Ball

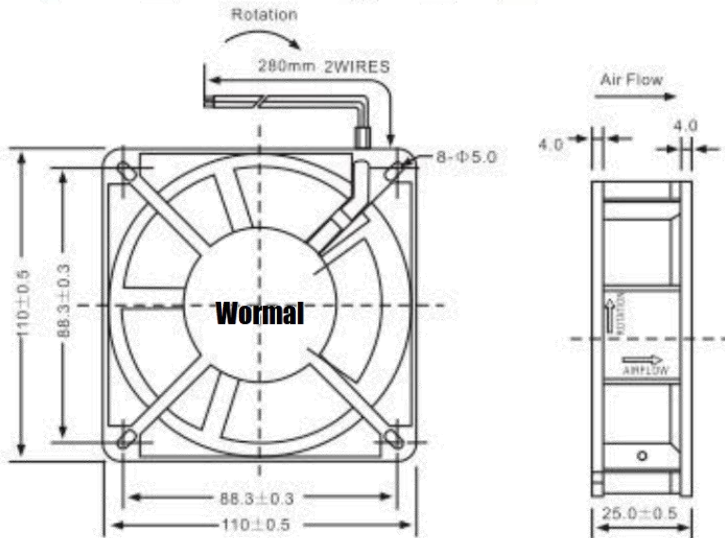

AC series Cooling Fan





型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-12025HS1	100-125	0.25	28/24	2600/2800	43/48	82/96	57/66	Sleeve
YWF-12025HS2	200-240	0.13	21	2300/2700	39/42	19/112	57/66	Sleeve
YWF-12025HB1	100-125	0.25	21	2300/2700	39/42	19/112	57/66	Ball
YWF-12025HB2	200-240	0.13	21	2300/2700	39/42	19/112	57/66	Ball
YWF-12025HB3	380-420	0.08	21	2300/2700	39/42	19/112	57/66	Ball

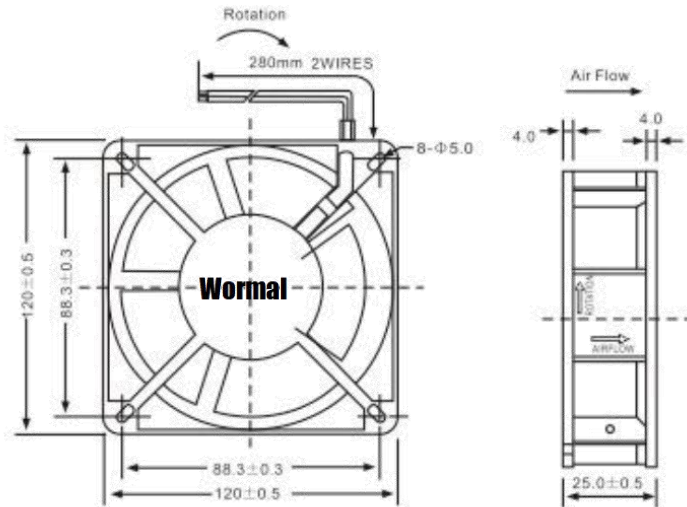



AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-12038HS	100-125	0.25	28/24	2600/2800	43/48	82/96	6.8/8.5	Sleeve
YWF-12038HS	200-240	0.14	28/24	2600/3000	43/48	82/96	6.8/8.5	Sleeve
YWF-12038HS	380-420	0.08	28/24	2600/3000	43/48	82/96	6.8/8.5	Sleeve
YWF-12038HB	100-125	0.25	28/24	2600/3000	43/48	82/96	6.8/8.5	Ball
YWF-12038HB	200-240	0.14	28/24	2600/3000	43/48	82/96	6.8/8.5	Ball
YWF-12038HB	380-420	0.08	28/24	2600/3000	43/48	82/96	6.8/8.5	Ball

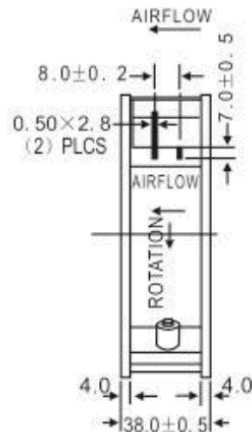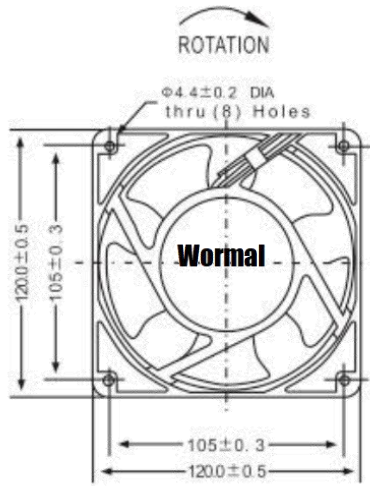



AC series Cooling Fan



型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-12038HS1	100-125	0.25	28/24	2600/2800	43/48	82/96	6.8/8.5	Sleeve
YWF-12038HS2	200-240	0.14	28/24	2600/3000	43/48	82/96	6.8/8.5	Sleeve
YWF-12038HS3	380-420	0.08	28/24	2600/3000	43/48	82/96	6.8/8.5	Sleeve
YWF-12038HB1	100-125	0.25	28/24	2600/3000	43/48	82/96	6.8/8.5	Ball
YWF-12038HB2	200-240	0.14	28/24	2600/3000	43/48	82/96	6.8/8.5	Ball
YWF-12038HB3	380-420	0.08	28/24	2600/3000	43/48	82/96	6.8/8.5	Ball

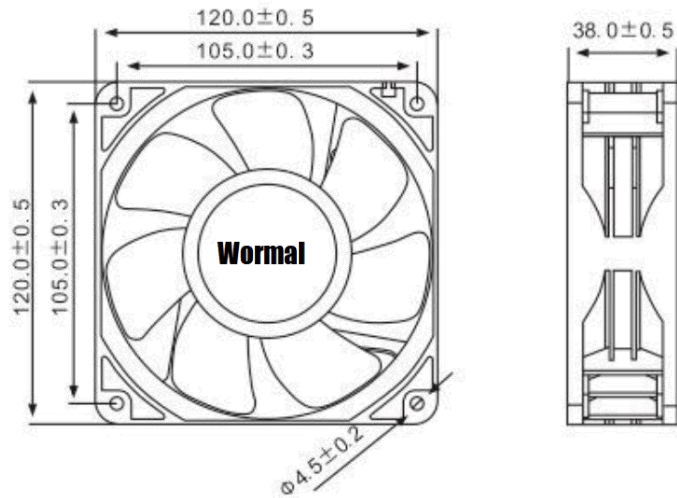




AC series Cooling Fan

型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-15050HS	100-125	0.56	35	2200/2600	49/54	160/176	7.5/9.7	Sleeve
YWF-15050HS	200-240	0.20	35	2200/2600	49/54	160/176	7.5/9.7	Sleeve
YWF-15050HS	380-420	0.13	35	2200/2600	49/54	160/176	7.5/9.7	Sleeve
YWF-15050HB	100-125	0.56	35	2200/2600	49/54	176/198	11.5/14.0	Ball
YWF-15050HB	200-240	0.20	35	2200/2600	49/54	176/198	11.5/14.0	Ball
YWF-15050HB	380-420	0.13	35	2200/2600	49/54	176/198	11.5/14.0	Ball

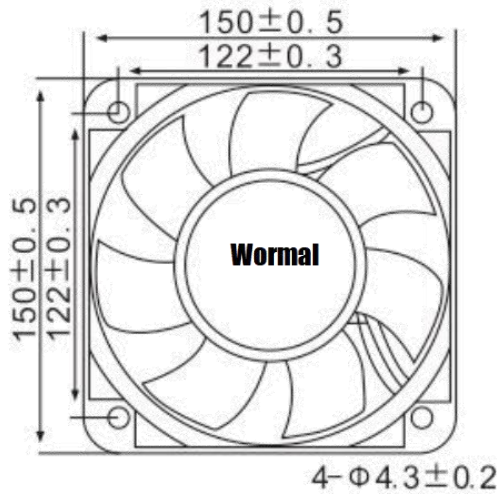

AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-17050HS	100-125	0.36	38	2500/2800	52/56	192/215	7.3/9.0	Sleeve
YWF-17050HS	200-240	0.22	38	2500/2800	52/56	192/215	7.3/9.0	Sleeve
YWF-17050HS	380-420	0.36	38	2500/2800	52/56	192/215	7.3/9.0	Sleeve
YWF-17050HB	100-125	0.22	38	2500/2800	52/56	192/215	12.0/15.0	Ball
YWF-17050HB	200-240	0.14	38	2250/2800	52/56	192/215	12.0/15.0	Ball

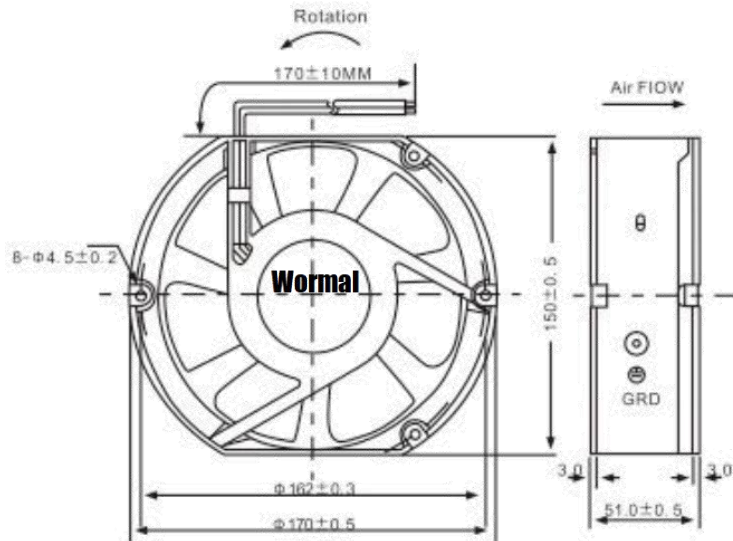



AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-17251HS	100-125	0.56	38	2200/2600	49/54	160/176	7.5/9.7	Sleeve
YWF-17251HS	200-240	0.20	38	2200/2600	49/54	160/176	7.5/9.7	Sleeve
YWF-17251HS	380-420	0.13	38	2200/2600	49/54	160/176	7.5/9.7	Sleeve
YWF-17251HB	100-125	0.56	38	2200/2900	49/54	176/198	17/19	Ball
YWF-17251HB	200-240	0.20	38	2200/2900	49/54	176/198	17/19	Ball
YWF-17251HB	380-420	0.13	38	2200/2900	49/54	176/198	17/19	Ball

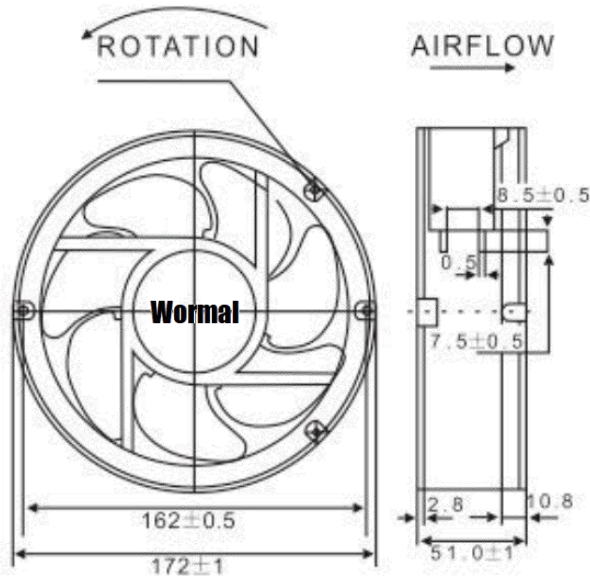




AC series Cooling Fan

型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-18060	100-125	0.70	50/72	2400/2700	57/59	290/330	15/17	Ball
YWF-18060	200-240	0.35	38	2400/2700	57/59	290/330	15/17	Ball
YWF-18060	380-420	0.40	38	2400/2700	57/59	290/330	15/17	Ball

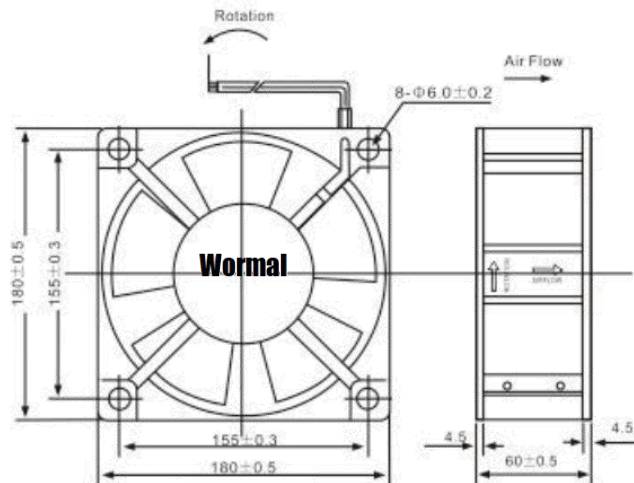

AC series Cooling Fan

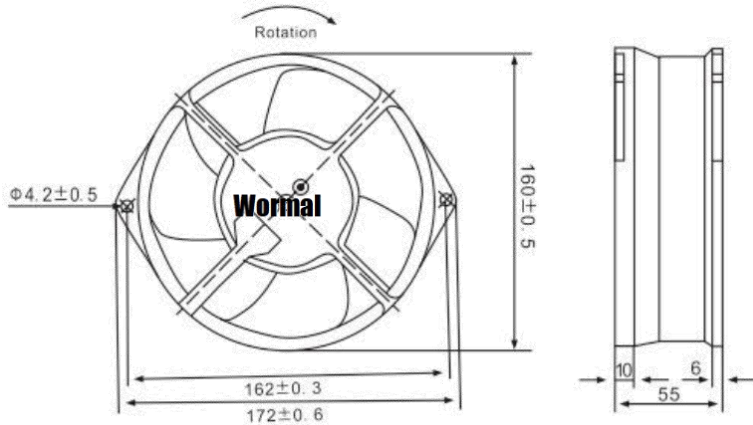


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-17055HB	100-125	0.58/0.5	42/39	2800/3100	48/52	191/224	17.3/20.5	Ball
YWF-17055HB	200-240	0.25/0.2	35/31	2800/3100	48/52	191/224	17.3/20.5	Ball
YWF-17055MB	100-125	0.4/0.35	35/31	2400/2800	45/48	191/224	17.3/20.5	Ball
YWF-17055MB	200-240	0.2/0.18	28/25	2400/2800	45/48	191/224	17.3/20.5	Ball
YWF-17055MB	380-420	0.11/0.1	35/31	2400/2800	45/48	191/224	17.3/20.5	Ball



AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	电容 Capacitor (μF/V)	轴承形式 Bearing Type
YWF-150-FZY1-D	100-125	0.32	30	2500/2800	65/68	194/223	3.3μF/400V	Ball
YWF-150-FZY2-D	200-240	0.15	30	2500/2800	65/68	194/223	1.0μF/400V	Ball
YWF-150-FZY4-D	380-420	0.09	30	2500/2800	65/68	194/223	/	Ball
YWF-150-FZY7-D	380-420	0.10	30	2500/2800	65/68	194/223	0.47μF/400V	Ball

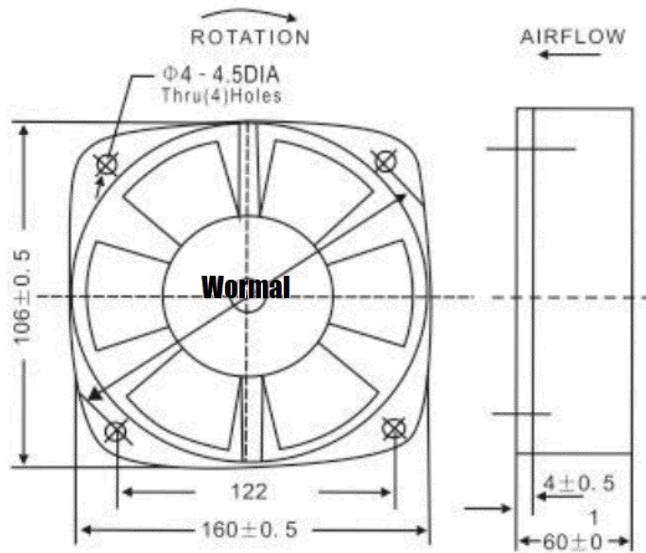



AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	电容 Capacitor (μF/V)	轴承形式 Bearing Type
YWF-200-FZY1-D	100-125	0.6	65	2600/3000	70/75	780/900	1μF/400V	Ball
YWF-200-FZY2-D	200-240	0.3	30	2600/3000	70/75	780/900	1μF/400V	Ball
YWF-200-FZY4-D	380-420	0.15	30	2600/3000	70/75	780/900	/	Ball
YWF-200-FZY7-D	380-420	0.16	30	2600/3000	70/75	780/900	1μF/400V	Ball

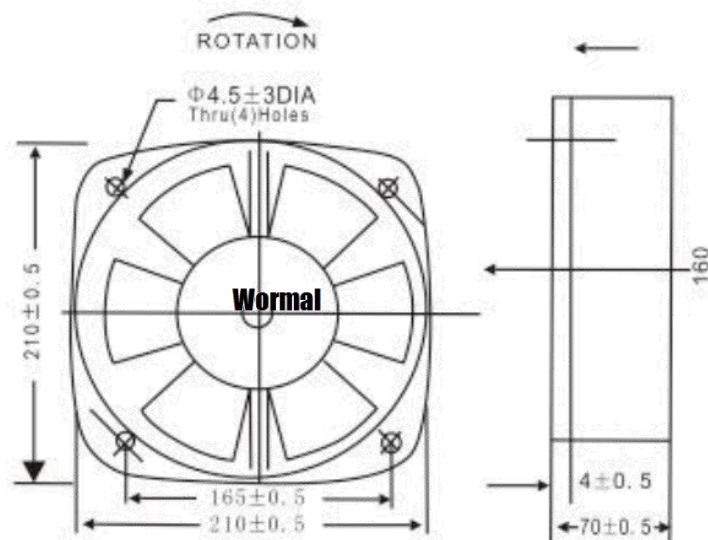



AC series Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-20060	100-125	0.62/0.58	77/55	2300/2600	64/66	350	17/19	Ball
YWF-20060	200-240	0.45/0.4	72/50	2300/2600	64/66	350	17/19	Ball
YWF-20060	380-420	0.23/0.2	72/50	2300/2600	64/66	350	17/19	Ball

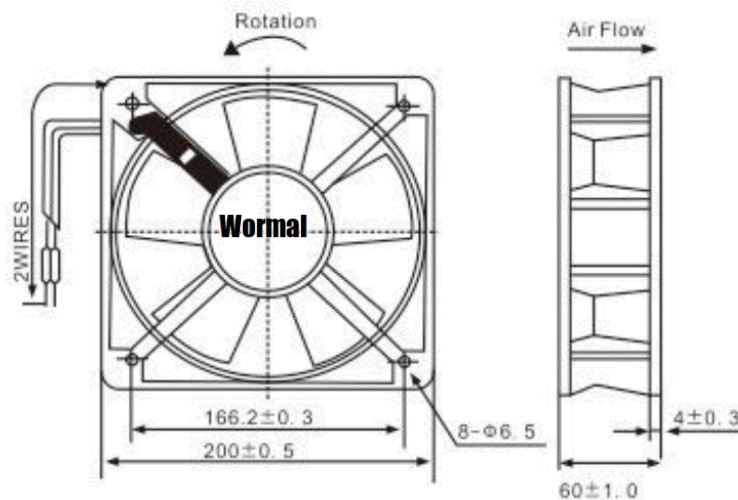

AC series Cooling Fan




型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-22060	100-125	0.62/0.58	77/55	2300/2500	54/66	335/350	17/19	Ball
YWF-22060	200-240	0.45/0.4	72/50	2300/2500	54/66	335/350	17/19	Ball
YWF-22060	380-420	0.23/0.2	72/50	2300/2500	54/66	335/350	17/19	Ball

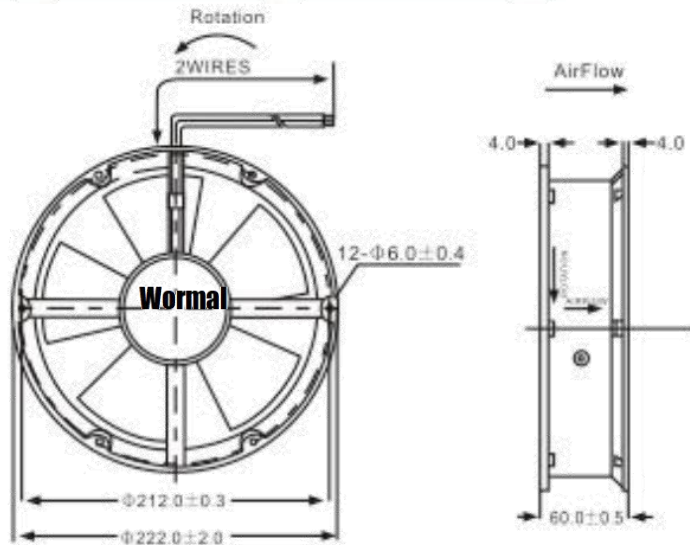



AC series Cooling Fan

型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	轴承形式 Bearing Type
YWF-22580HB	100-125	0.74	80	2500/2850	63/66	618/760	Ball
YWF-22580HB	200-240	0.4	80	2500/2850	63/66	618/760	Ball
YWF-22580HB	380-420	0.32	80	2500/2850	63/66	618/760	Ball

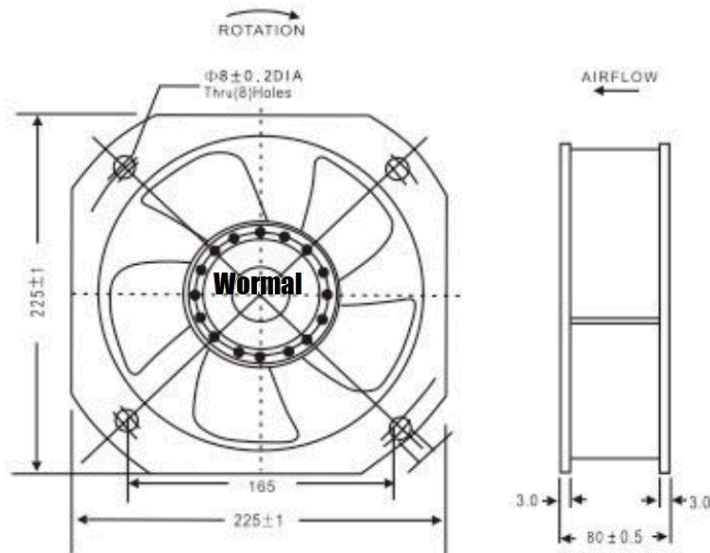





AC series

Cooling Fan


型号 Model No.	电压 Voltage (V)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	噪音 Noise (dBA)	最大风量 Max Airflow (CFM)	风压 Air pressure (mmH.O)	轴承形式 Bearing Type
YWF-25489HB	110	1.0/0.5	100/130	2600/3000	65/62	820/935	20/24	Ball
YWF-25489MB	110	0.75/09	65/80	2000/2300	59/59	628/720	17.5/19	Ball
YWF-25489HB	220	0.6/0.7	100/130	2600/3000	65/62	820/935	20/24	Ball
YWF-25489MB	220	0.35/0.45	65/80	2000/2300	59/59	628/720	17.5/19	Ball
YWF-25489HB	380	0.3/0.35	100/130	2600/3000	65/62	820/935	20/24	Ball
YWF-25489MB	380	0.35/0.45	65/80	2000/2300	59/59	628/720	17.5/19	Ball

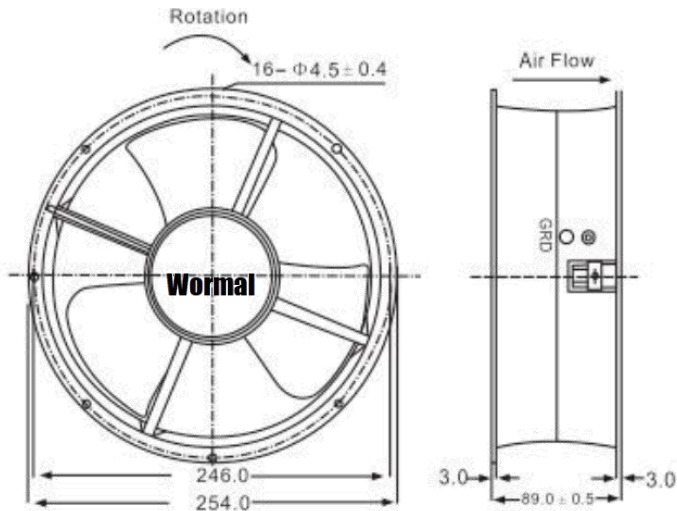

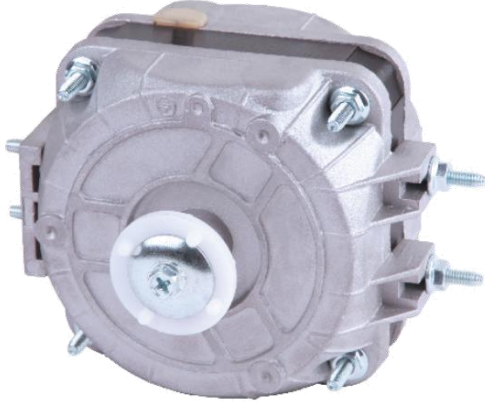

Shaped-pole motor


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风叶 FAN (MM)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	Ø170	0.80	260
YWF-Z-48N35W	230	50/60	0.170	35	1300	Ø200	0.80	450
YWF-Z-48N35W	110	60	0.400	35	1450	Ø200	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	Ø230	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1450	Ø230	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	Ø250	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1450	Ø250	1.30	900
YWF-Z-48N75W	230	50/60	0.570	75	1300	Ø254	1.60	1000
YWF-Z-48N75W	110	60	1.100	75	1450	Ø254	1.60	1000
YWF-Z-48N90W	230	50/60	0.600	90	1300	Ø300	1.90	1100
YWF-Z-48N90W	110	60	1.400	90	1450	Ø300	1.90	1100
YWF-Z-48N110W	230	50/60	0.850	110	1300	Ø300	2.20	1100
YWF-Z-48N110W	110	60	1.500	110	1450	Ø300	2.20	1100

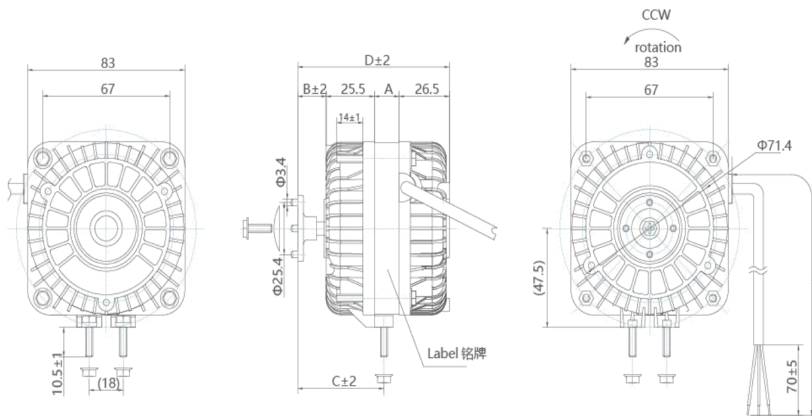




Shaped-pole motor


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风叶 FAN (MM)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	Ø170	0.80	260
YWF-Z-48N35W	230	50/60	0.170	35	1300	Ø200	0.80	450
YWF-Z-48N35W	110	60	0.400	35	1450	Ø200	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	Ø230	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1450	Ø230	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	Ø250	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1450	Ø250	1.30	900
YWF-Z-48N75W	230	50/60	0.570	75	1300	Ø254	1.60	1000
YWF-Z-48N75W	110	60	1.100	75	1450	Ø254	1.60	1000
YWF-Z-48N90W	230	50/60	0.600	90	1300	Ø300	1.90	1100
YWF-Z-48N90W	110	60	1.400	90	1450	Ø300	1.90	1100
YWF-Z-48N110W	230	50/60	0.850	110	1300	Ø300	2.20	1100
YWF-Z-48N110W	110	60	1.500	110	1450	Ø300	2.20	1100

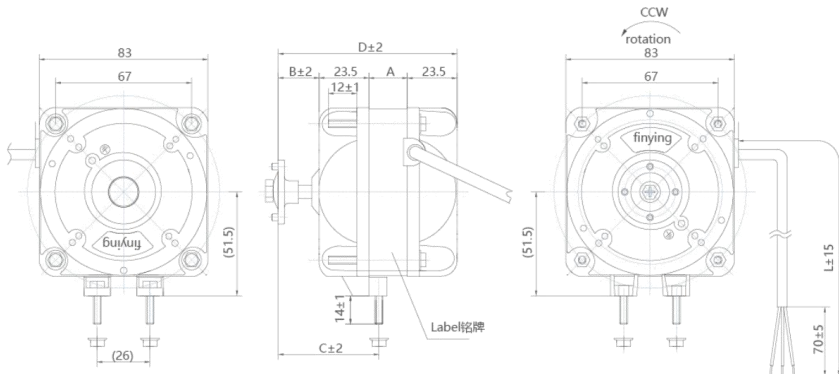


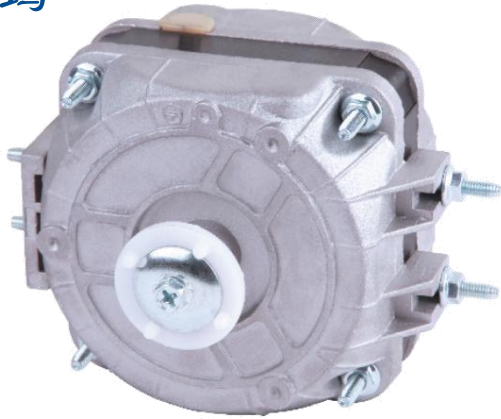

Shaped-pole motor


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风叶 FAN (MM)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	Ø170	0.80	260
YWF-Z-48N35W	230	50/60	0.170	35	1300	Ø200	0.80	450
YWF-Z-48N35W	110	60	0.400	35	1550	Ø200	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	Ø230	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1550	Ø230	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	Ø250	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1550	Ø250	1.30	900
YWF-Z-48N75W	230	50/60	0.570	75	1300	Ø254	1.60	1000
YWF-Z-48N75W	110	60	1.100	75	1550	Ø254	1.60	1000
YWF-Z-48N90W	230	50/60	0.600	90	1300	Ø300	1.90	1100
YWF-Z-48N90W	110	60	1.400	90	1550	Ø300	1.90	1100
YWF-Z-48N110W	230	50/60	0.850	110	1300	Ø300	2.20	1100
YWF-Z-48N110W	110	60	1.500	110	1550	Ø300	2.20	1100

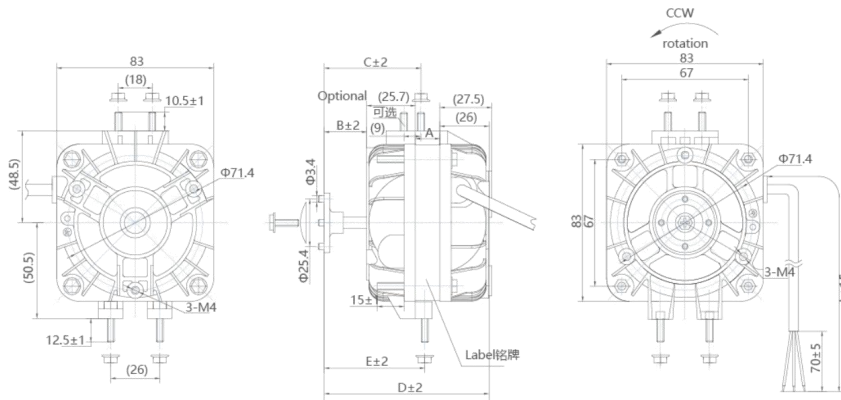


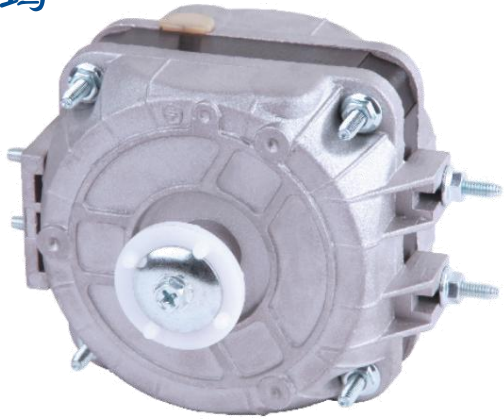

Shaped-pole motor


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风叶 FAN (MM)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	Ø170	0.80	260
YWF-Z-48N35W	230	50/60	0.170	35	1300	Ø200	0.80	450
YWF-Z-48N35W	110	60	0.400	35	1550	Ø200	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	Ø230	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1550	Ø230	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	Ø250	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1550	Ø250	1.30	900
YWF-Z-48N75W	230	50/60	0.570	75	1300	Ø254	1.60	1000
YWF-Z-48N75W	110	60	1.100	75	1550	Ø254	1.60	1000
YWF-Z-48N90W	230	50/60	0.600	90	1300	Ø300	1.90	1100
YWF-Z-48N90W	110	60	1.400	90	1550	Ø300	1.90	1100
YWF-Z-48N110W	230	50/60	0.850	110	1300	Ø300	2.20	1100
YWF-Z-48N110W	110	60	1.500	110	1550	Ø300	2.20	1100

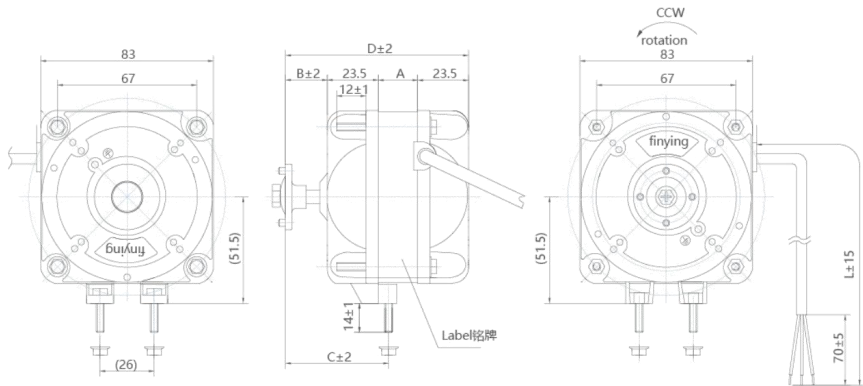


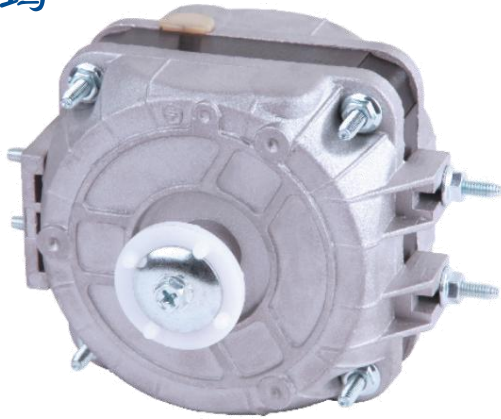

Shaped-pole motor


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风叶 FAN (MM)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	Ø170	0.80	260
YWF-Z-48N35W	230	50/60	0.170	35	1300	Ø200	0.80	450
YWF-Z-48N35W	110	60	0.400	35	1550	Ø200	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	Ø230	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1550	Ø230	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	Ø250	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1550	Ø250	1.30	900
YWF-Z-48N75W	230	50/60	0.570	75	1300	Ø254	1.60	1000
YWF-Z-48N75W	110	60	1.100	75	1550	Ø254	1.60	1000
YWF-Z-48N90W	230	50/60	0.600	90	1300	Ø300	1.90	1100
YWF-Z-48N90W	110	60	1.400	90	1550	Ø300	1.90	1100
YWF-Z-48N110W	230	50/60	0.850	110	1300	Ø300	2.20	1100
YWF-Z-48N110W	110	60	1.500	110	1550	Ø300	2.20	1100

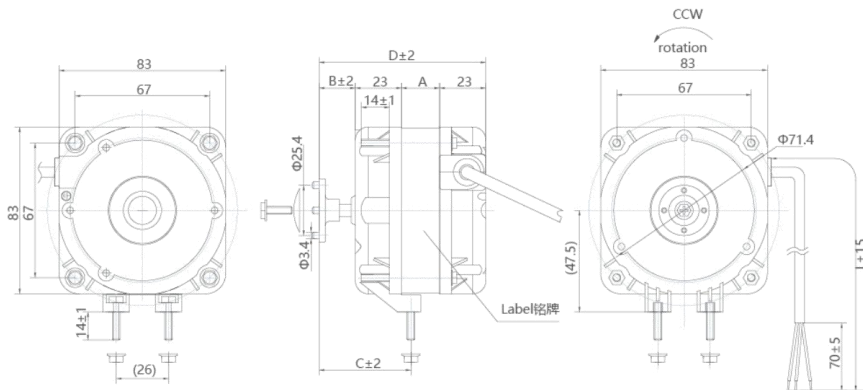

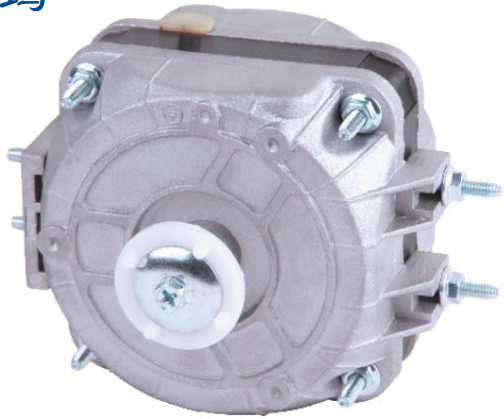

Shaped-pole motor


型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风叶 FAN (MM)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	Ø170	0.80	260
YWF-Z-48N35W	230	50/60	0.170	35	1300	Ø200	0.80	450
YWF-Z-48N35W	110	60	0.400	35	1550	Ø200	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	Ø230	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1550	Ø230	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	Ø250	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1550	Ø250	1.30	900
YWF-Z-48N75W	230	50/60	0.570	75	1300	Ø254	1.60	1000
YWF-Z-48N75W	110	60	1.100	75	1550	Ø254	1.60	1000
YWF-Z-48N90W	230	50/60	0.600	90	1300	Ø300	1.90	1100
YWF-Z-48N90W	110	60	1.400	90	1550	Ø300	1.90	1100
YWF-Z-48N110W	230	50/60	0.850	110	1300	Ø300	2.20	1100
YWF-Z-48N110W	110	60	1.500	110	1550	Ø300	2.20	1100

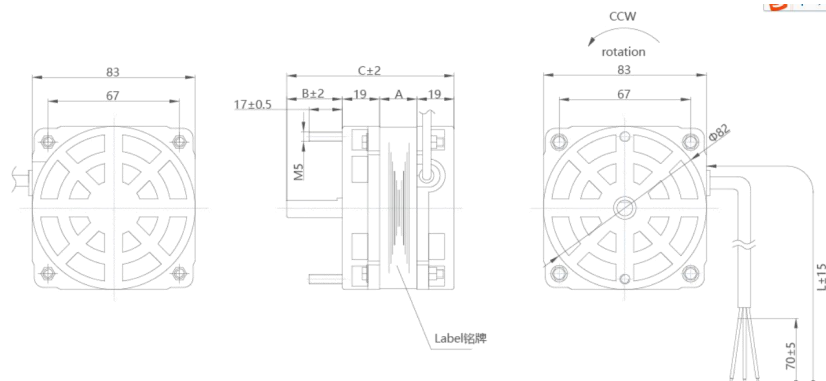



Shaped-pole motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	风叶 FAN (MM)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-3	230	50/60	0.145	29	1300	Ø200	0.80	450
YWF-Z-3	110	60	0.400	29	1550	Ø200	0.80	450
YWF-Z-7	230	50/60	0.260	40	1300	Ø230	1.00	650
YWF-Z-7	110	60	0.530	40	1550	Ø230	1.00	650
YWF-Z-12	230	50/60	0.370	60	1300	Ø250	1.30	900
YWF-Z-12	110	60	0.650	60	1550	Ø250	1.30	900



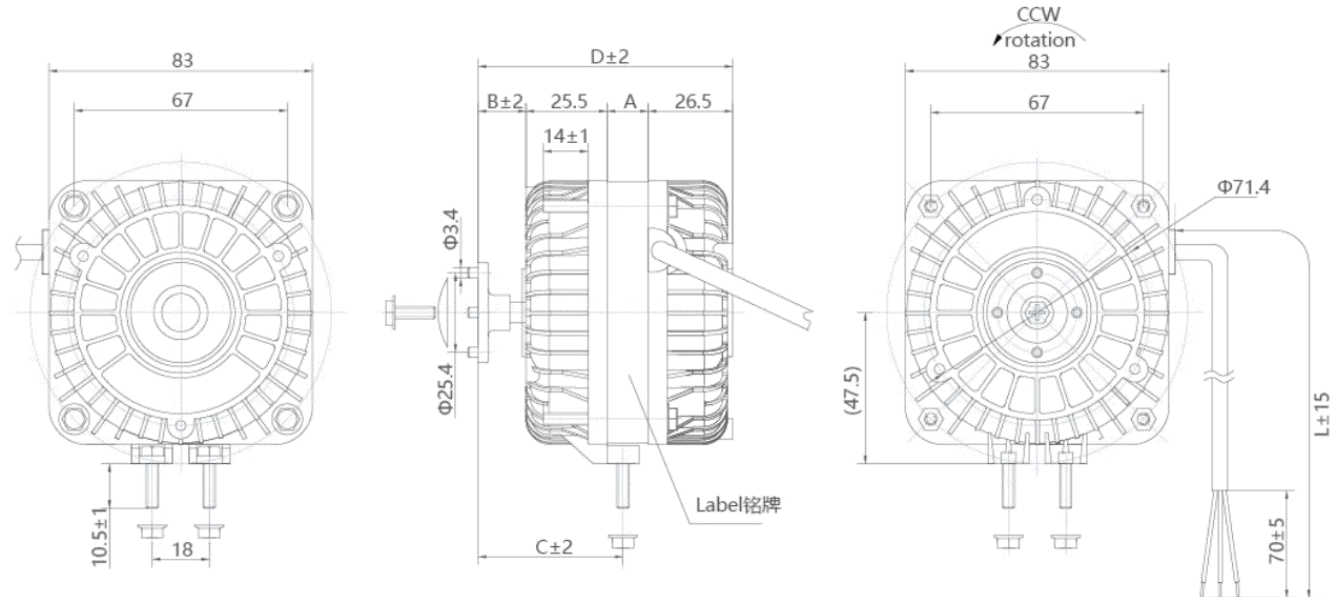




Shaped-pole motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	0.80	260
YWF-Z-48N35W	230	50/60	0.170	29	1300	0.80	450
YWF-Z-48N35W	110	60	0.400	29	1550	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1550	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1550	1.30	900

从A向俯视图
View from Direction A

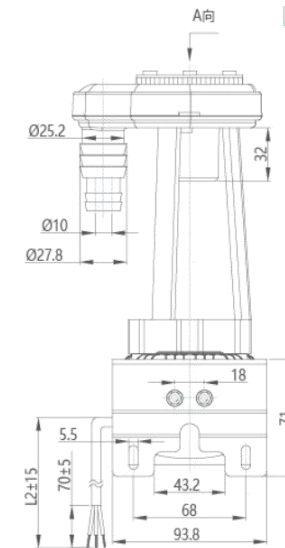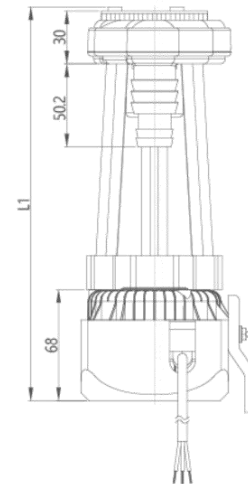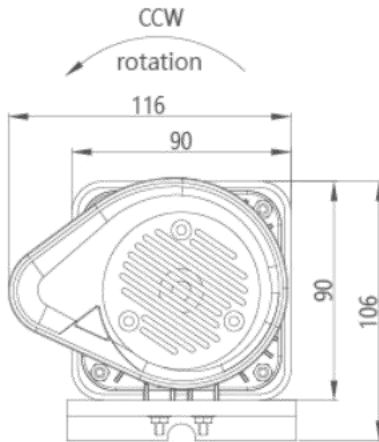





Shaped-pole motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	0.80	260
YWF-Z-48N35W	230	50/60	0.170	29	1300	0.80	450
YWF-Z-48N35W	110	60	0.400	29	1550	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1550	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1550	1.30	900


YZF48N-25W

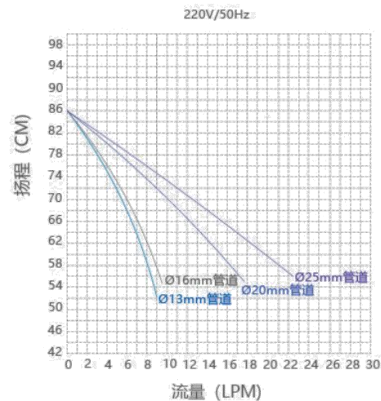


YZF48N-35W

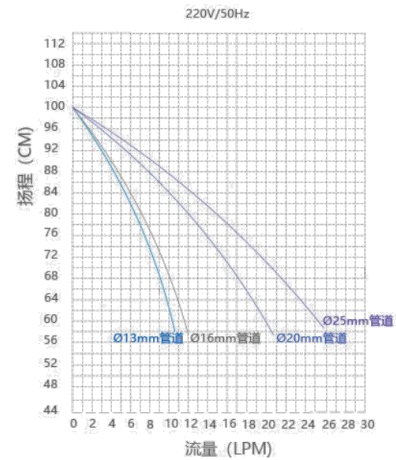

YZF48N-40W

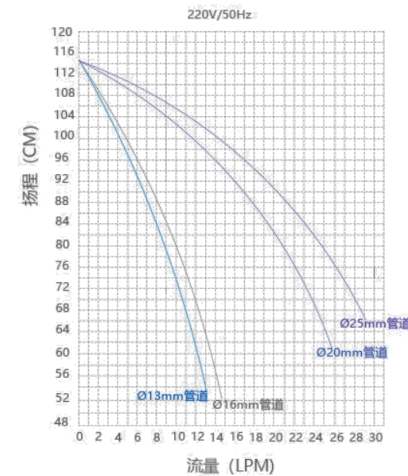


YZF48N-60W

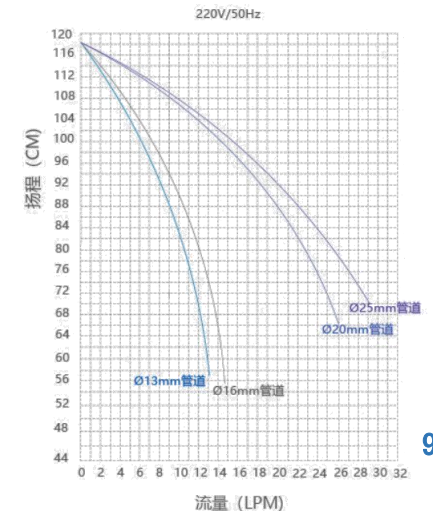



Shaped-pole motor

型号 Model No.	电压 Voltage (V)	频率 Frequency (HZ)	电流 Current (A)	功率 Input power (W)	转速 Speed (R/MIN)	净重 N.W. (KG)	最大风量 Max Airflow (m³/h)
YWF-Z-48N25W	230	50/60	0.145	25	1300	0.80	260
YWF-Z-48N35W	230	50/60	0.170	29	1300	0.80	450
YWF-Z-48N35W	110	60	0.400	29	1550	0.80	450
YWF-Z-48N40W	230	50/60	0.260	40	1300	1.00	650
YWF-Z-48N40W	110	60	0.530	40	1550	1.00	650
YWF-Z-48N60W	230	50/60	0.370	60	1300	1.30	900
YWF-Z-48N60W	110	60	0.650	60	1550	1.30	900

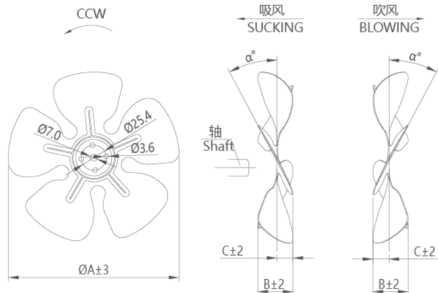

风叶规格尺寸 Fan specification and dimension

Fan type 风叶型号	α° A mm	19 °				22 °				25 °				28 °				31 °				34 °			
		B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm	B mm	C mm
Ø 154	152	23	12	26	13	29	15	32	17	36	18	39	21												
Ø 172	170	25	13	28	14	31	16	34	17	38	18	41	21												
Ø 200	196	27	14	30	15	33	17	36	19	40	21	43	24												
Ø 230	228	30	15	33	16	36	19	39	21	42	20	45	23												
Ø 250	244	31	15	34	16	37	19	40	20	43	21	45	22												
Ø 254	252	32	15	35	16	38	18	41	21	44	22	47	23												
Ø 300	296	37	18	41	21	44	22	48	24	52	26	52	27												

风叶选型 fan model selection

Fan	Model α°	YZF48N-25W		YZF48N-35W		YZF48N-40W		YZF48N-60W		YZF48N-75W		YZF48N-90W		YZF48N-110W	
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz
Ø 154		31	31												
Ø 172		31	31												
Ø 200		28	28	31	31	31	31								
Ø 230				28	28	28	28								
Ø 250						22	22	28	28						
Ø 254								28	25	31	28				
Ø 300										22	22	25	22	28	25